

Shower Trimless 60

-  IP65
-  Class III
-  Ceiling Recessed
-  Acoustic Proof
-  Anti glare hazard UGR<19
-  RG1 | Blue light
-  70mm
-  Altamente riciclabile
Highly recyclable
-  FSC
Package




5.4Watt Trimless Adjustable Downlight

Code	System Power	LED Power	Lumens(at 3000K)	CRI	Lifetime (Ta 25°C)
DL3682	6.8W	150mA 36V	362lm	≥90	50.000h L90B10

Finish	LED CCT	Beam
101 Textured White	 2700K	 15°
102 Textured Black	 3000K	 24°
	 4000K	 36°

Key Information	
Material	Aluminium
Mounting	Ceiling Recessed
Gear	This product is supplied without gear.
Warranty	5 Year

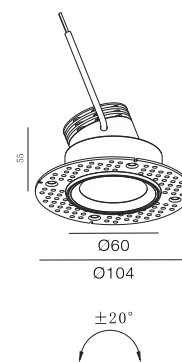

Light Distribution for 2700K

Narrow 15°

h(m)	E(lx)	o(m)
1	10871	o0.62
2	271.8	o1.24
3	120.8	o1.86
4	67.90	o2.48
5	43.40	o3.10