
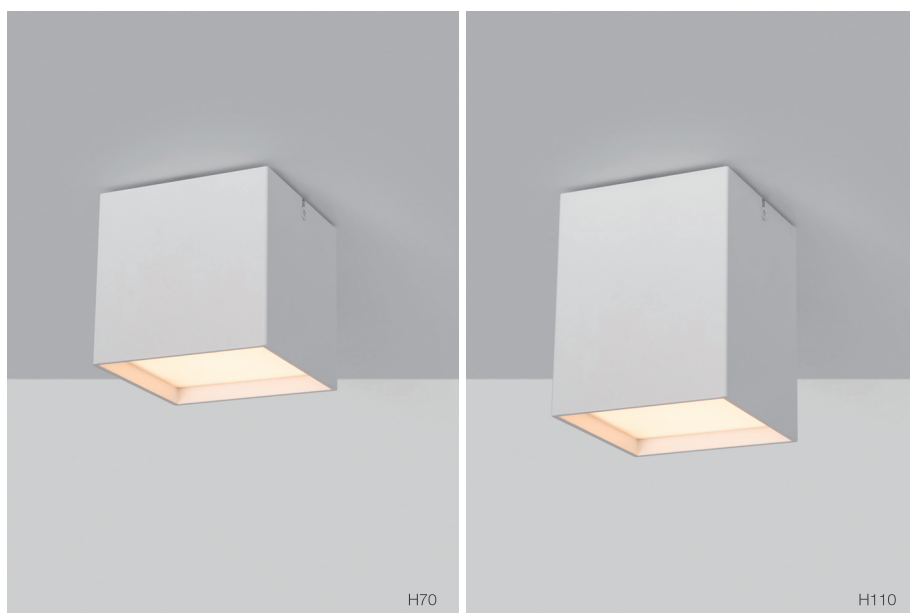






# Diffused Surface Square 88



-  IP21
-  Class I
-  Ceiling Surface
-  Anti glare hazard  
UGR<21
-  RG1 | Blue light
-  Altamente riciclabile  
Highly recyclable
-  FSC  
Package



## 9Watt Diffused Surface Downlight

Code	System Power	LED Power	Lumens(at 3000K)	CRI	Lifetime (Ta 25°C)
SD3133	11W	250mA 36V	800lm	>90	50.000h L90B10

Finish	LED CCT	Beam	Key Information	
101 Textured White	 2700K	 80°	Material	Aluminium
102 Textured Black	 3000K		Mounting	Ceiling Surface
	 4000K		Warranty	5 Year



### Gear

This product is supplied with on/off, phase-dim power supply.