

DL3540

20W Fixed Round Commercial Downlight

Description



Deep recessed & slim trim;
Interchangeable baffle in various finishing;
IP54 ingress protection;
Ultra low-glare;

Finish

Black/White

Material

Aluminium

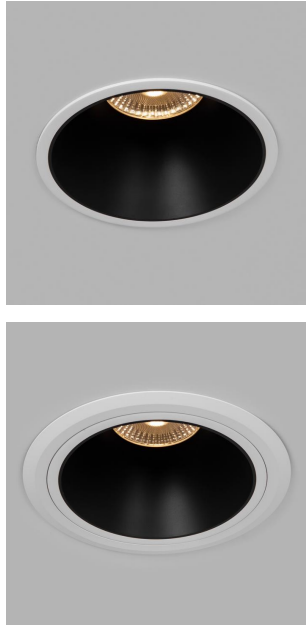

TECHNICAL CHARACTERISTICS

Light source



Light source: Citizen 1204
Output (W): 18W (500mA, 36V)
Total power consumption (W): 20W
Color temperature: 2700K/3000K/4000K
CRI: ≥90
Photobiological risk: RG1
Real Lumen: 1723lm
Qty Leds: 1
Lm/Real W: 81.71lm
Life Time: 50.000h L90B10
MacAdam steps: 3
UGR: <19

GEAR

This product is supplied without gear
Boke non dimmable driver or dali dimmable
driver is recommended

Luminaire

Downlight suitable for indoor area
crossing: No
Warranty: 5 Years

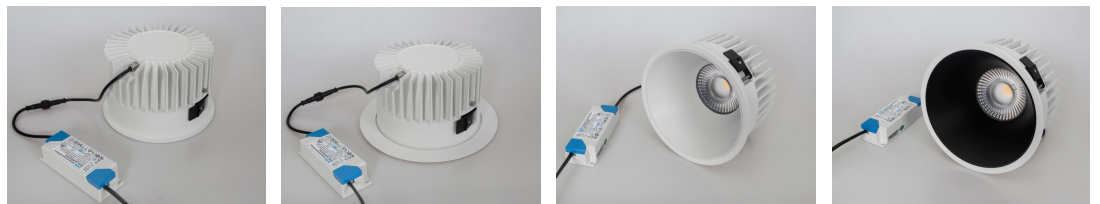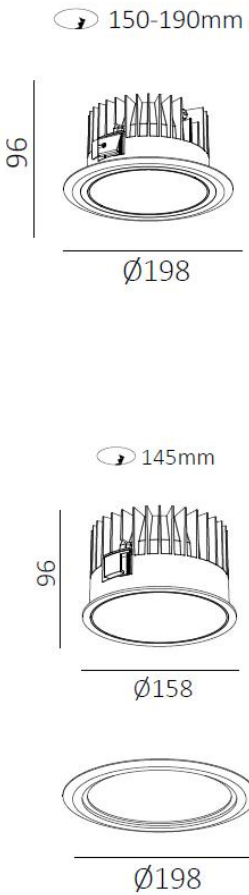

LIGHT DISTRIBUTION for 3000K

wide 57°

h(m)	E(lx)	Ø(m)
1	2090	Ø1.08
2	522.5	Ø2.17
3	232.2	Ø3.27
4	130.6	Ø4.36
5	83.60	Ø5.45

The photograph may not match the reference exactly. Please read the product description to identify the finish.