

DL3541

30W Fixed Round Commercial Downlight

Description

Deep recessed & slim trim;
Interchangeable baffle in various finishing;
IP54 ingress protection;
Ultra low-glare;

Finish


Black/White

Material



Aluminium



165-210mm

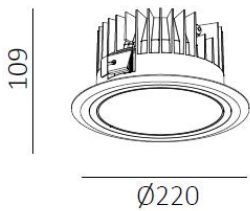

165mm



200-210mm
5-25mm

TECHNICAL CHARACTERISTICS

Light source


Light source: Citizen 1205
Output (W): 25.2W (700mA, 36V)
Total power consumption (W): 30W
Color temperature: 2700K/3000K/4000K
CRI: ≥90
Photobiological risk: RG1
Real Lumen: 2245 lm
Qty Leds: 1
Lm/Real W: 81.64lm
Life Time: 50.000h L90B10
MacAdam steps: 3
UGR: <19

GEAR

This product is supplied without gear
Boke non dimmable driver or dali
dimmable driver is recommended

Luminaire

Downlight suitable for indoor area
crossing: No
Warranty: 5 Years

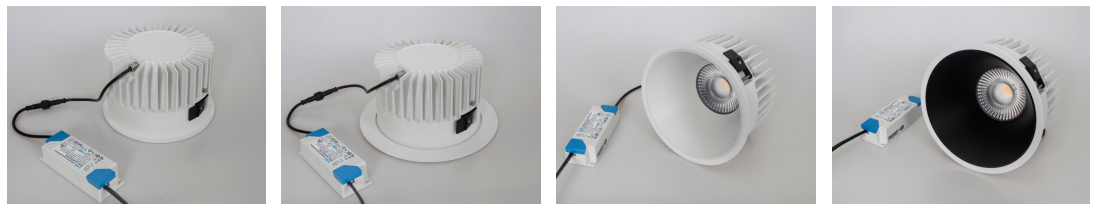

LIGHT DISTRIBUTION for 3000K
wide 57°

h(m)	E(lx)	Ø(m)
1	2717	Ø1.08
2	679.3	Ø2.16
3	304.9	Ø3.24
4	169.8	Ø4.32
5	108.7	Ø5.40

The photograph may not match the reference exactly. Please read the product description to identify the finish.