


Retractable 25


-  IP21
-  Class III
-  Ceiling Recessed
-  Acoustic Proof
-  Anti glare hazard UGR<14
-  RG1 | Blue light
-  60mm
-  Altamente riciclabile Highly recyclable
-  FSC Package

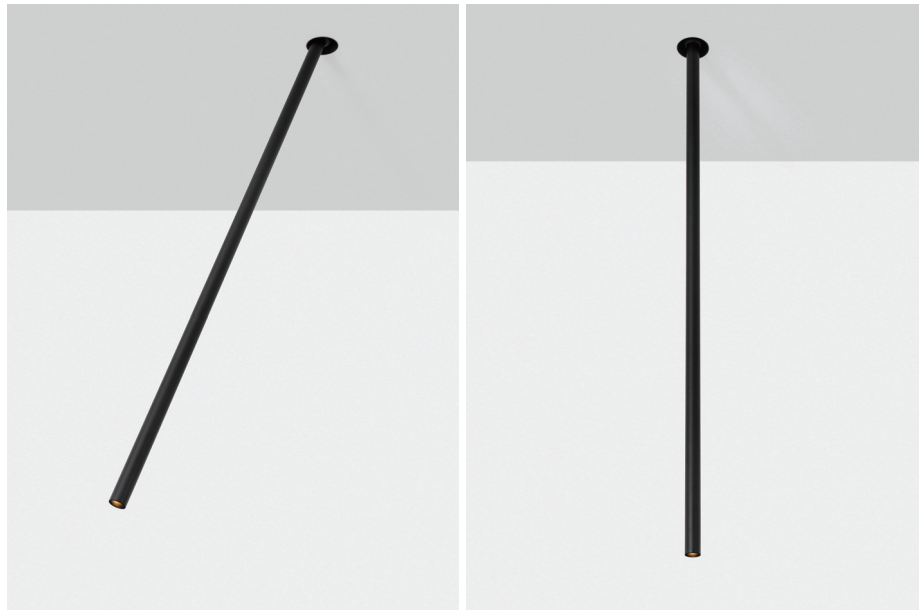

6Watt Gyro Tiltable Downlight

Code	System Power	LED Power	Lumens(at 3000K)	CRI	Lifetime (Ta 25°C)
DL3638	7.5W	500mA 12V	300lm	>93/97	50.000h L90B10

Finish	LED CCT	Beam	Key Information	
101 Textured White	2700K	15°	Material	Aluminium
102 Textured Black	3000K	36°	Mounting	Ceiling Recessed
	4000K		Gear	This product is supplied without gear.
			Warranty	5 Year

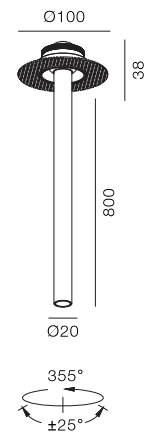



Light Distribution for 3000K

spot 13°

h(m)	E(lx)	o(m)
1	1003	o0.23
2	250.7	o0.45
3	111.4	o0.68
4	62.67	o0.91
5	40.11	o1.14

Accessories

- 2  Glass Diffuser
- 2  Honeycomb Louvre