













Classic Surface Slim 40


-  IP21
-  Class I
-  Ceiling Surface
-  Anti glare hazard UGR<19
-  RG1 | Blue light
-  Altamente riciclabile Highly recyclable
-  FSC Package



12.6Watt Adjustable Surface Spotlight

Code	System Power	LED Power	Lumens(at 3000K)	CRI	Lifetime (Ta 25°C)
SD3154	14.8W	350mA 36V	950lm	>93/97	50.000h L90B10

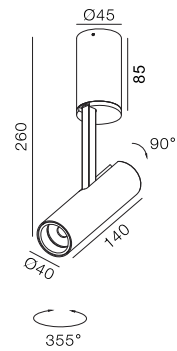

Finish	LED CCT	Beam	Key Information	
Powder Coat	 2700K	 20°	Material	Aluminium
Liquid Paint	 3000K	 36°	Mounting	Ceiling Surface
Anodize	 4000K	 50°	Warranty	5 Year



Light Distribution for 3000K

spot 21°			medium 26°			wide 38°		
h(m)	E(lx)	o(m)	h(m)	E(lx)	o(m)	h(m)	E(lx)	o(m)
1	2172	o0.37	1	2478	o0.47	1	1498	o0.68
2	543.1	o0.75	2	619.5	o0.94	2	374.5	o1.36
3	241.4	o1.12	3	275.3	o1.41	3	166.4	o2.04
4	135.8	o1.49	4	154.9	o1.87	4	93.62	o2.73
5	86.90	o1.87	5	99.12	o2.34	5	59.92	o3.41

Accessories

- 2  Glass Diffuser
- 2  Honeycomb Louvre

Gear

This product is supplied with on/off, phase-dim or DALI power supply