

**SD3220**

**7W Adjustable Surface Mounted Light**

**Description**

Compact body;  
Adjustable front lid;



**Finish**  
White/Black

**Material**  
Aluminium



**TECHNICAL CHARACTERISTICS**

**Light source**


Light source:Luminus CXM-4 Chip  
Output (W): 6.3W (350mA 18V)  
Total power consumption (W): 7W  
Color temperature: 2700K/3000K/4000K  
CRI: 90  
Photobiological risk:RG1  
Real Lumen: 591lm  
Qty Leds: 1  
Lm/Real W: 84lm  
Life Time: 50.000h L90B20  
MacAdam steps: 3  
UGR: 20

**Gear**

This product is supplied with gear:  
With built-in sunricher dali dimmable driver  
SRP-2305-9CC 9W;

**Luminaire**

Crossing: No  
Warranty: 5 Years

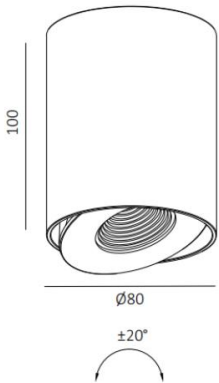

**LIGHT DISTRIBUTION for 2700K spot 9°**

h(m)	E(lx)	Ø(m)
1	11200	Ø0.19
2	2800	Ø0.37
3	1244	Ø0.56
4	700	Ø0.75
5	448	Ø0.93

The photograph may not match the reference exactly. Please read the product description to identify the finish.