
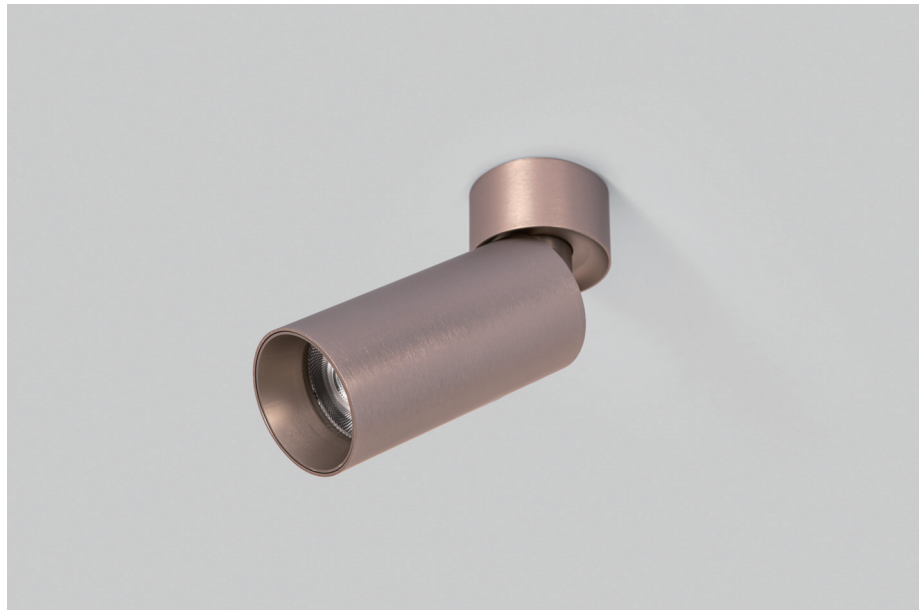









# Compact Surface 60

-  IP44
-  Class III
-  Ceiling Surface
-  Anti glare hazard  
UGR<19
-  RG1 | Blue light
-  Altamente riciclabile  
Highly recyclable
-  FSC  
Package




## 11Watt Surface Adjustable Spot with Built-in Driver



Code	System Power	LED Power	Lumens(at 3000K)	CRI	Lifetime (Ta 25°C)
SD3276	9W	250mA 36V	900lm	>93/97	50.000h L90B10

Finish	LED CCT	Beam
Powder Coat	 2700K	 18°
Liquid Paint	 3000K	 24°
Anodize	 4000K	 36°
		 55°

Key Information	
Material	Aluminium
Mounting	Ceiling Surface
Warranty	5 Year



### Accessories

- 2  Glass Diffuser
- 2  Honeycomb Louvre

### Gear

This product is supplied with built-in phase dim or DALI driver.