

PL3030

35W LED Pendant Light (Surface/Track Mount)


Description

Pendant light for commercial areas.

High power pendant designed for shops & storage display areas; Supplied with or without add-on dual color lamp shield; On/off, phase cut, 0-10V, Dali driver available upon request; Surface or track mount installation methods; Structure material: Aluminium(6063). Structure finish: Black/White. Optical device: Reflector type/Polycarbonate. Warranty: 5 Years.

Finish
Black
White

Material
Aluminium



TECHNICAL CHARACTERISTICS

Light source

Light source: Bridgelux V13
850mA 36V
Power consumption (W): 35W
Color temperature: 2700K/3000K/4000K
CRI: 80/90
Photobiological risk: RG1
Real Lumen: 2950lm
Qty Leds: 1
Lm/Real W: 84
Life Time: 50.000h L90B20
MacAdam steps: 3
UGR: 19

GEAR

Osram in-track adaptor;
Single or 3 phase track adaptor;

Logistics


Net Weight (Kg): 0.53
Weight in Kg (packaged): 5
Packing: 110 x 85x 170mm
Masterbox: 20PCS/Cartons

Accessory

Lamp shield: Black/White
Surface mounting ceiling rose

Luminaire

Track mount or surface mounting
LED for commercial or industry areas
crossing: No
Warranty: 5 Years

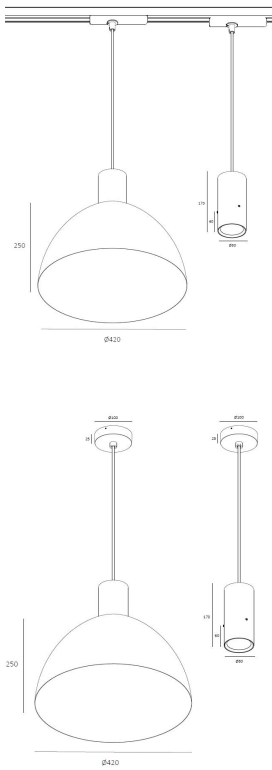

LIGHT DISTRIBUTION for 3000K medium 23°

h(m)	E(lx)	Ø(m)
1	1660	Ø0.39
2	415.1	Ø0.79
3	184.5	Ø1.19
4	103.8	Ø1.59
5	66.41	Ø1.98

Photometric 3000K 24D Ra.90



The photograph may not match the reference exactly. Please read the product description to identify the finish.