







Display Gyro 35


-  IP54
-  Class III
-  Ceiling Recessed
-  Acoustic Proof
-  Anti glare hazard UGR<19
-  RG1 | Blue light
-  35mm
-  Altamente riciclabile Highly recyclable
-  FSC Package



1.5W Mini Gyro Tiltable Downlight for Cabinet

Code	System Power	LED Power	Lumens(at 3000K)	CRI	Lifetime (Ta 25°C)
DL3367	2.1W	500mA 3V	120lm	≥90	50.000h L90B10

Finish	LED CCT	Beam	Key Information	
101 Textured White	 2700K	 20°	Material	Aluminium
102 Textured Black	 3000K	 30°	Mounting	Ceiling Recessed
	 4000K	 40°	Gear	This product is supplied without gear.
			Warranty	5 Year

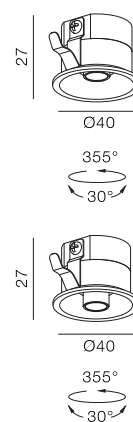

Light Distribution for 2700K

spot 15°

h(m)	E(lx)	o(m)
1	402.4	ø0.44
2	100.6	ø0.88
3	44.71	ø1.31
4	25.15	ø1.75
5	16.09	ø2.19