


Pendant Linear 1800

-  IP54
-  Class I
-  Ceiling Surface
-  RG1 | Blue light
-  Altamente riciclabile
Highly recyclable
-  FSC
Package

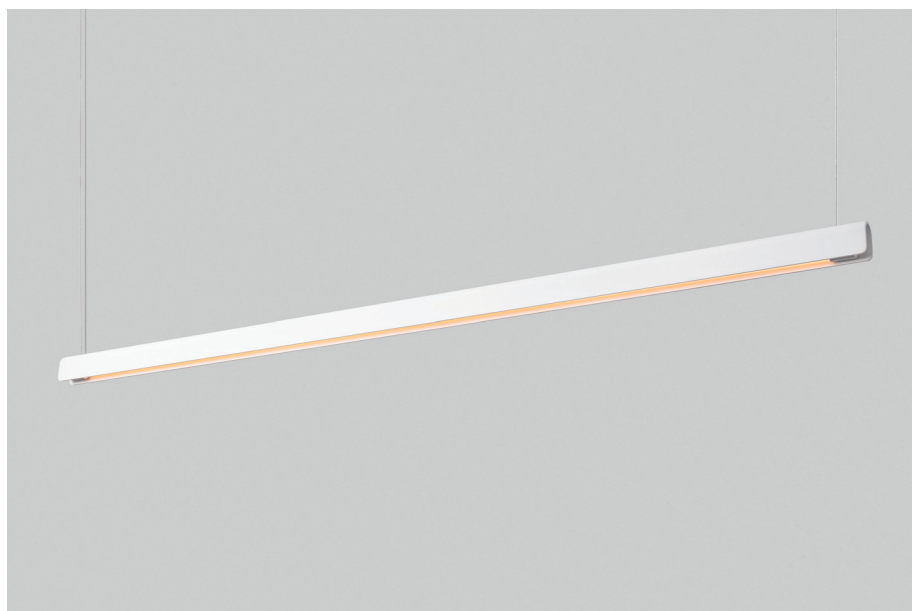


60Watt Linear Diffused Pendant 1800

Code	System Power	LED Power	Lumens(at 3000K)	CRI	Lifetime (Ta 25°C)
PI3085	60W	24V	3500lm	>90	50.000h L90B10

Finish	LED CCT	Beam
<input type="checkbox"/> 101 Textured White	<input type="checkbox"/> 2700K	<input type="checkbox"/> 120°
<input type="checkbox"/> 102 Textured Black	<input type="checkbox"/> 3000K	
	<input type="checkbox"/> 4000K	

Key Information	
Material	Aluminium
Mounting	Ceiling Surface
Warranty	5 Year

Sketch

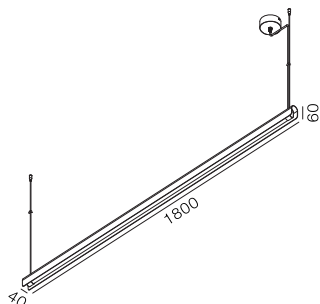

Gear
This product is supplied with built-in phase cut or DALI driver.