

WL3374

3W Surface Mounted LED Reading Light

Description


55D Adjustable;
Bulit-in on/off driver;
IP20;

Finish

Black/White/Bronze

Material

Aluminium



TECHNICAL CHARACTERISTICS

Light source



Light source: Osram OSOLON SSL 150 LED
Output (W): 2.1W(700mA 3V)
Total power consumption (W): 3W
Color temperature: 2700K/3000/4000K
CRI: ≥90
Real Lumen: 156LM
Lm/Real W: 52
Life Time: 50.000h L70 B20
MacAdam steps: 3
UGR: N/A

GEAR

This product is supplied with gear
Bulit-in ACTEC Triac dimmable driver
MINI-4-700T 700mA 2.5-6V.

Luminaire

IP20 for indoor use
crossing: No
Warranty: 5 Years

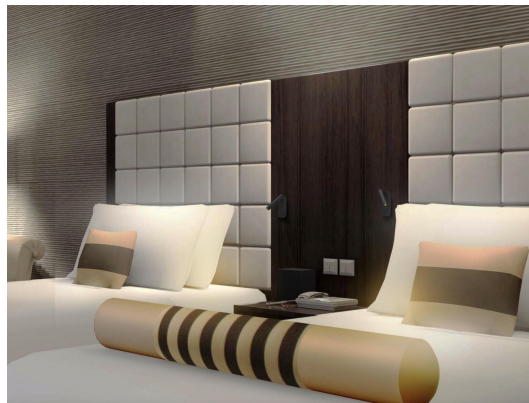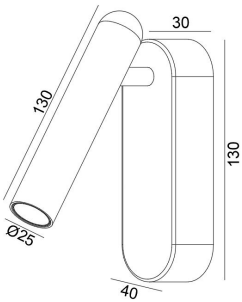

The photograph may not match the reference exactly. Please read the product description to identify the finish.