

WL3182

3W Surface Mounted/Recessed Mounted LED Reading Light





Description

Surface Mounted/Recessed Mounted Installation Available;
55D Adjustable;
IP20;

Finish
Black/White/Bronze

Material
Aluminium

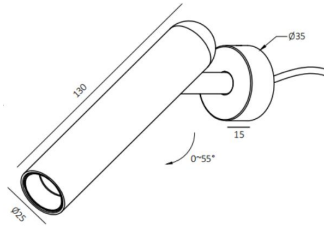

TECHNICAL CHARACTERISTICS

Light source



Light source: Osram Osolan Square
Output (W): 700mA 3V 2.1W
Total power consumption (W): 3W
Color temperature: 2700K/3000/4000K
CRI: ≥ 90
Real Lumen: 200
Lm/Real W: 66
Life Time: 50.000h L70 B20
MacAdam steps: 3
UGR: N/A

GEAR

This product is supplied without gear.

Luminaire

IP20 for indoor use
crossing: No
Warranty: 5 Years

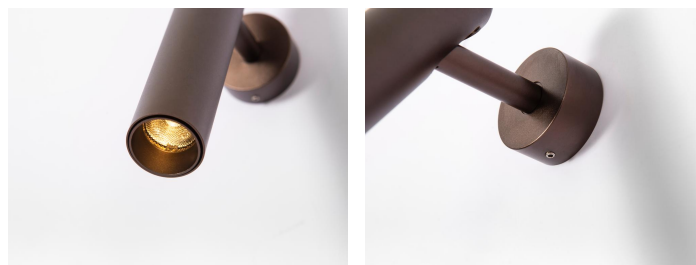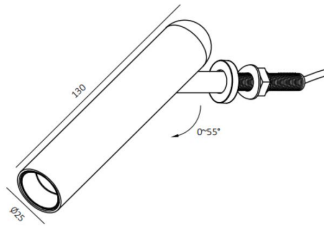

The photograph may not match the reference exactly. Please read the product description to identify the finish.