

WL3113

Slim Tubular Up&down Wall Light

Description

Up&down wall light with hinge installation,
Up/down 20degree beam;
Modular design;
Built-in LED driver;
IP65

Finish

Black
White

Material

Aluminium
SUS316 Stainless steel



TECHNICAL CHARACTERISTICS

Light source



Light source: Lumileds 5050
Output (W): 120mA 24V, 2*2.88 W
Total power consumption (W): 6W
Color temperature: 2700K/3000K
CRI: ≥ 90
IK: 10
Real Lumen: 400
Lm/Real W: 66
Life Time: 50.000h L70 B20
MacAdam steps: 3
UGR: N/A

GEAR

This product is supplied with
built-in TCI IP65 proof driver.

Luminaire

IP65 for indoor & outdoor use
crossing: No
Warranty: 5 Years

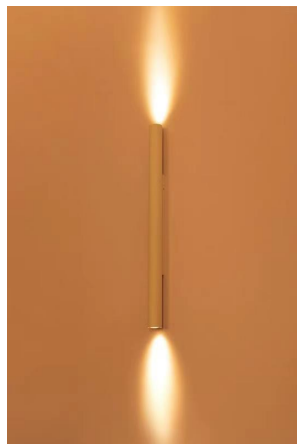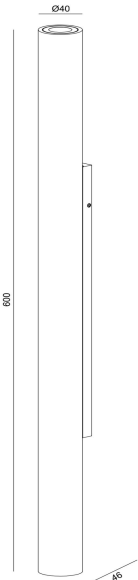

The photograph may not match the reference exactly. Please read the product description to identify the finish.