

WL3123

20W Uplight Wall Light




Description

Compact design;
Driver on board technology;
Ultra slim;

Finish
Black/White

Material
Aluminium



TECHNICAL CHARACTERISTICS

Light source

Light source: China LTWG chip
Output (W): 230V 20W
Total power consumption (W): 20W
Color temperature: 2700K/3000K
CRI: 90
Photobiological risk: RG1
Real Lumen: 1477lm
Qty Leds: 40pcs
Lm/Real W: 73
Life Time: 50.000h L80B20
MacAdam steps: 3
UGR: 19

Gear


This product is supplied with gear
This product is phase cut dimming product.

Luminaire

crossing: No
Warranty: 5 Years

LIGHT DISTRIBUTION for 3000K
Wide 106°

| h(m) | E(lx) | Ø(m) |
|------|--------|-------|
| 1 | 514.71 | Ø2.65 |
| 2 | 128.71 | Ø5.30 |
| 3 | 57.19 | Ø7.96 |
| 4 | 32.17 | Ø10.6 |
| 5 | 20.59 | Ø13.2 |

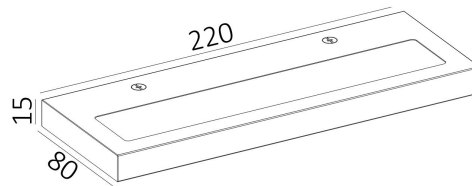

The photograph may not match the reference exactly. Please read the product description to identify the finish.