

# Wall Paddle 280

IP21


Class I

Wall Surface

RG1 | Blue light

Altamente riciclabile  
Highly recyclable

FSC  
Package

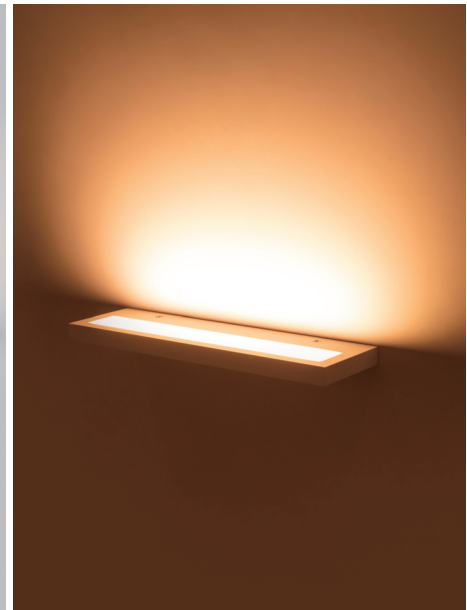


## 30Watt Upshine Wall Light for Indoor

Code	System Power	Lumens(at 3000K)	CRI	Lifetime (Ta 25°C)
WLS124	30W	2000lm	>90	50,000h L90B10

Finish	LED CCT
Powder Coat	<span style="color: orange;">■</span> 2700K
Anodize	<span style="color: orange;">■</span> 3000K
	<span style="color: orange;">■</span> 4000K

Key Information	
Material	Aluminium
Mounting	Wall Surface
Warranty	5 Year



Light Distribution for 3000K		
wide 92°		
h(m)	E(lx)	o(m)
1	746.7	o2.09
2	186.7	o4.18
3	82.97	o6.26
4	46.67	o8.35
5	29.87	o10.44

**Gear**  
This product is supplied with driver on board.