

WL3125

10W triangle Wall light

Description


Invisible screws after installation;
High combination and usage of raw material, to save material,
and be friendly to environment;
Dim2warm version available upon request;
External cord and plug with switch or cord dimmer as accessory;
IP21 (IP54 available upon request);

Finish

White
Black

Material

Aluminium
Stainless steel SUS304



TECHNICAL CHARACTERISTICS

Light source


Light source: 24pcs Osram SMD2835
Output (W): 9W (250mA 36V)
Total power consumption (W): 10W
Color temperature: 2700K/3000K
CRI: ≥90
Photobiological risk: RG1
Real Lumen: 500lm
Qty Leds: 24
Lm/Real W: 50
Life Time: 50.000h L90B10
MacAdam steps: 3
UGR: 14

Gear


This product is supplied with gear.
Built-in Eaglerise non dimmable driver
CS-12-250 SB1 250mA 28-42V

Luminaire

Wall light suitable for indoor area
crossing: No
Warranty: 5 Years

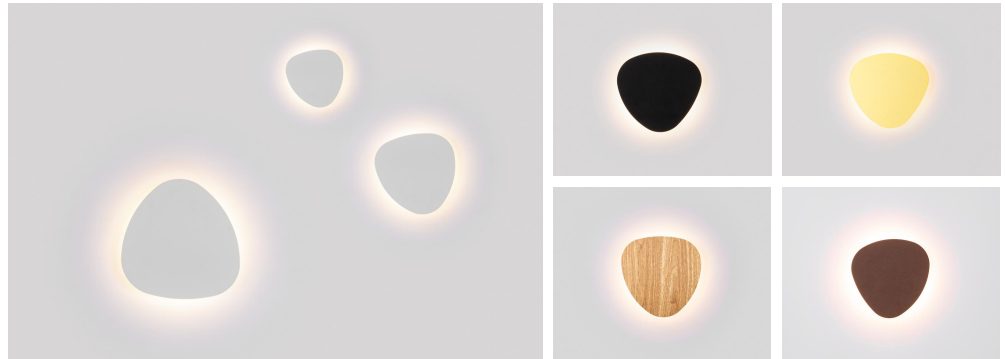

The photograph may not match the reference exactly. Please read the product description to identify the finish.



WL3126

15W triangle Wall light

Description



Invisible screws after installation;
High combination and usage of raw material, to save material,
and be friendly to environment;
Dim2warm version available upon request;
External cord and plug with switch or cord dimmer as accessory;
IP21 (IP54 available upon request);

Finish

White
Black

Material

Aluminium
Stainless steel SUS304

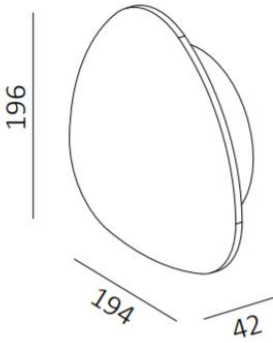

TECHNICAL CHARACTERISTICS

Light source


Light source: 36pcs Osram SMD2835
Output (W): 12.6W (350mA 36V)
Total power consumption (W): 15W
Color temperature: 2700K/3000K/4000K
CRI: ≥90
Photobiological risk: RG1
Real Lumen: 800lm
Qty Leds: 36
Lm/Real W: 53
Life Time: 50.000h L90B10
MacAdam steps: 3
UGR: 14

Gear



This product is supplied with gear.
Built-in Eaglerise non dimmable driver
CS-15-350 SB 350mA 28-42VDC

Luminaire

Wall light suitable for indoor area
crossing: No
Warranty: 5 Years

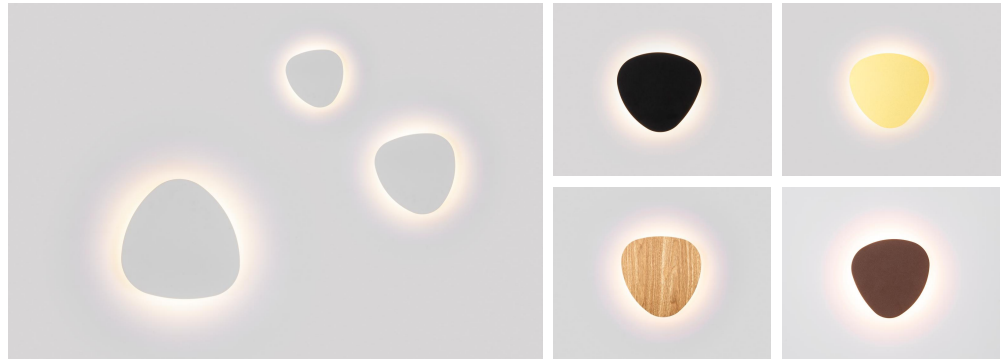

The photograph may not match the reference exactly. Please read the product description to identify the finish.

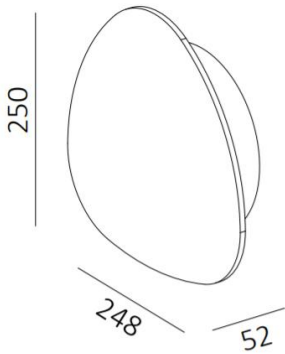

WL3127

20W Triangle Wall light

Description


Invisible screws after installation;
High combination and usage of raw material, to save material,
and be friendly to environment;
Dim2warm version available upon request;
External cord and plug with switch or cord dimmer as accessory;
IP21 (IP54 available upon request);

Finish

White
Black

Material

Aluminium
Stainless steel SUS304



TECHNICAL CHARACTERISTICS

Light source


Light source: 48pcs Osram SMD2835
Output (W): 18W (500mA 36V)
Total power consumption (W): 20W
Color temperature: 2700K/3000K
CRI: ≥ 90
Photobiological risk: RG1
Real Lumen: 1000lm
Qty Leds: 48
Lm/Real W: 50
Life Time: 50.000h L90B10
MacAdam steps: 3
UGR: 14

Gear

This product is supplied with gear.
Built-in Eaglerise non dimmable driver
CS-25-500 LB 500mA 28-43V

Luminaire

Wall light suitable for indoor area
crossing: No
Warranty: 5 Years

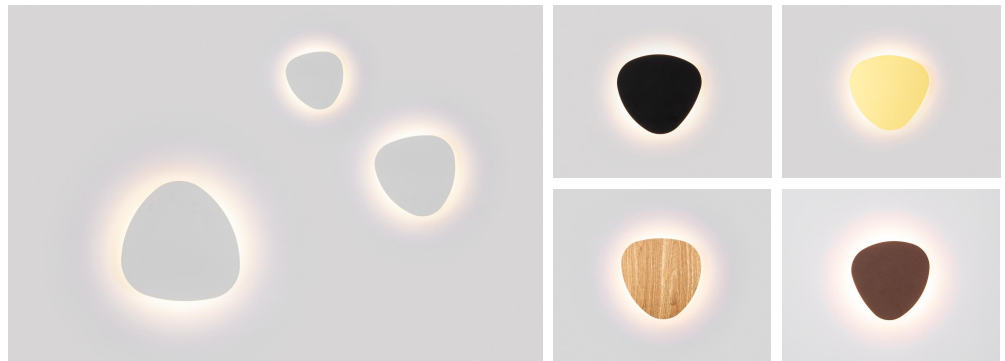

The photograph may not match the reference exactly. Please read the product description to identify the finish.