


WL3346

5W DC24V Waterproof Single Head Led Down Light

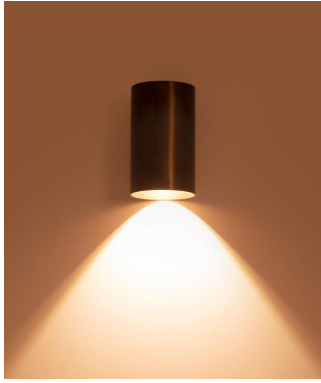

Description


Down light
IP65
No Screw Design
DC24V

Finish

Black/White/Anodizing Color

Material

Aluminium

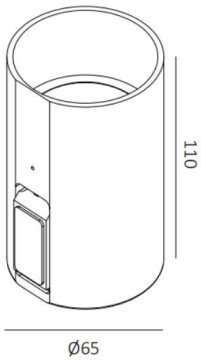

TECHNICAL CHARACTERISTICS

Light source

Light source:Luminus COB
Output (W): 5W DC24V
Total power consumption (W):5W
Color temperature: 2700K/3000/4000K
RI: 90
Photobiological risk: RG1
Real Lumen: 168lm
Qty Leds: 1
Lm/Real W: 37lm
Life Time: 50.000h L90B10
MacAdam steps: 3
UGR: 19

GEAR

This product is supplied without gear


Luminaire

Downlight suitable for outdoor area
crossing: No
Warranty: 5 Years

LIGHT DISTRIBUTION for 3000K

h(m)	E(lx)	Ø(m)
1	150.7	Ø0.13
2	37.68	Ø0.25
3	16.75	Ø0.37
4	9.42	Ø0.50
5	6.03	Ø0.63


Photometric 3000K Ra.90

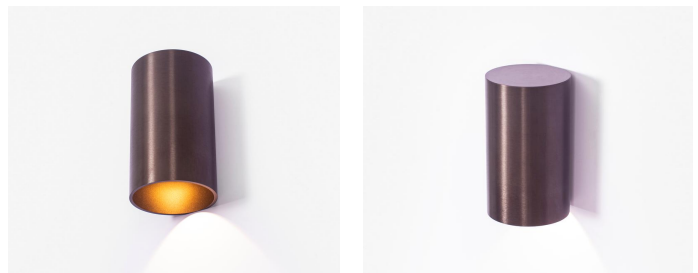

The photograph may not match the reference exactly. Please read the product description to identify the finish.

WL3347

2*4W DC24V Waterproof Double Head Led Up and Down Light

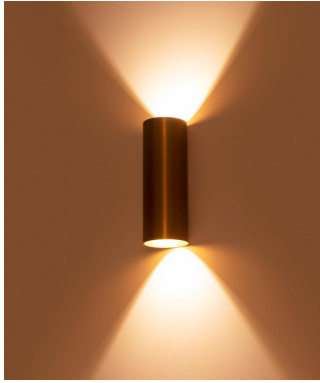

Description


Up&Down light
IP65
No Screw Design
DC24V

Finish

Black/White/Anodizing Color

Material

Aluminium

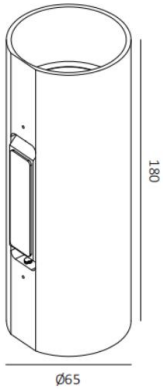

TECHNICAL CHARACTERISTICS

Light source

Light source:Luminus COB
Output (W): 2*4W DC24V
Total power consumption (W):2*4W
Color temperature: 2700K/3000/4000K
RI: 90
Photobiological risk: RG1
Real Lumen: 168lm
Qty Leds: 1
Lm/Real W: 37lm
Life Time: 50.000h L90B10
MacAdam steps: 3
UGR: 19

GEAR

This product is supplied without gear


Luminaire

Downlight suitable for outdoor area
crossing: No
Warranty: 5 Years

LIGHT DISTRIBUTION for 3000K

h(m)	E(lx)	Ø(m)
1	150.7	Ø0.13
2	37.68	Ø0.25
3	16.75	Ø0.37
4	9.42	Ø0.50
5	6.03	Ø0.63

Photometric 3000K Ra.90

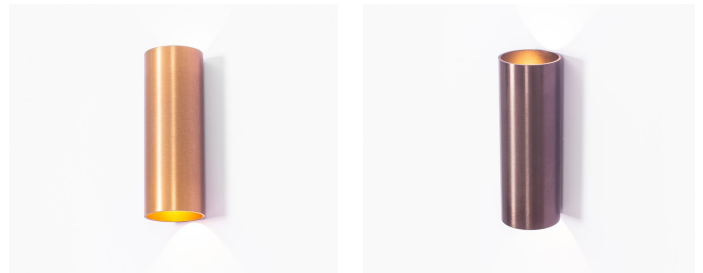

The photograph may not match the reference exactly. Please read the product description to identify the finish.