

Mirror Spa 600

IP44


Class I

Wall Surface

RG1 | Blue light

Altamente riciclabile
Highly recyclable

FSC
Package

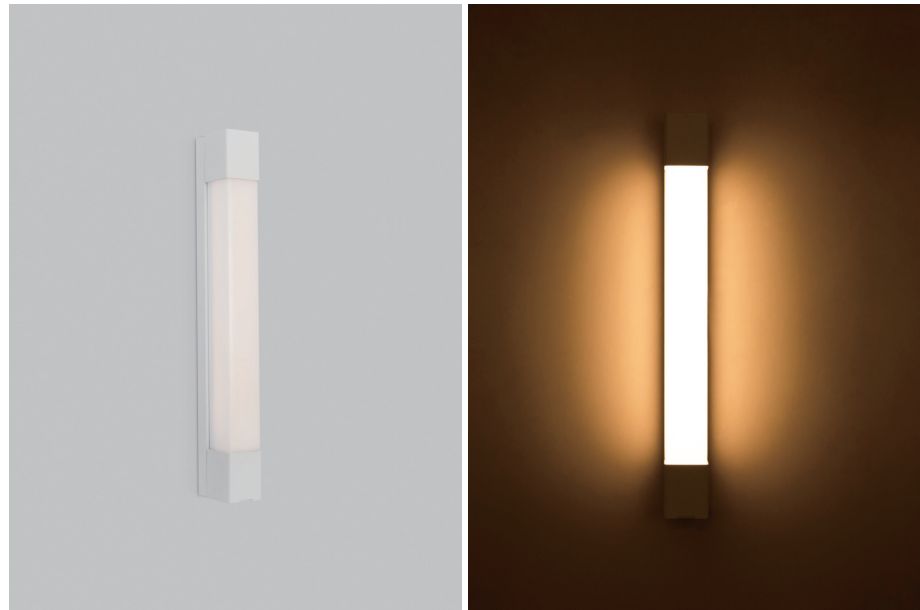

8.4Watt Linear Mirror Light with 230V 10A Socket


Code	System Power	LED Power	Lumens(at 3000K)	CRI	Lifetime (Ta 25°C)
SD3102	10.5W	350mA 24V	700lm	>90	50.000h L90B10

Finish LED CCT

101	Textured White	2700K
102	Textured Black	3000K
		4000K

Key Information

Material	Aluminum,PC
Mounting	Wall Surface
Warranty	5 Year

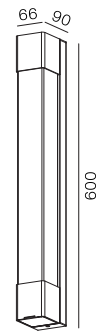

Light Distribution for 3000K

wide 98,5°

h(m)	E(lx)	o(m)
1	152.0	ø2.32
2	37.99	ø4.64
3	16.89	ø6.96
4	9.492	ø9.29
5	6.079	ø11.61

Gear

This product is supplied with Built-in phase dim or DALI driver.