



WL3107


2*5W Up & Down CORA Wall Lighting

Description

Slim wall light;
No visible screws;
IP65;

Finish
Black

Material
Aluminium
SUS316 Stainless steel

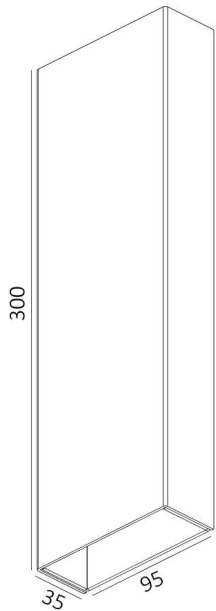

TECHNICAL CHARACTERISTICS

Light source


Light source: Lumileds 3030
Output (W): 2*4.2W (2*175mA 24V)
Total power consumption (W): 2*5W
Color temperature: 2700K/3000K/4000K
CRI: ≥90
Photobiological risk: RG1
Real Lumen: 450lm without honeycomb
Qty Leds: 48pcs
Lm/Real W: 55
Life Time: 50.000h L90B10
MacAdam steps: 3
UGR: 14

GEAR

This product is supplied with gear.
ACTEC Traic dimmable driver
MINI-10-350T 350mA 15-29V
(RCM Certificate)

Luminaire

Wall light suitable for indoor
and outdoor area
crossing: No
Warranty: 5 Years

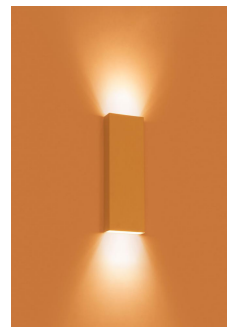

The photograph may not match the reference exactly. Please read the product description to identify the finish.