

**WL3244**

**5W Down Led Wall Lighting**

**Description**

Slim wall light;  
No visible screws;  
IP65;

**Finish**

Black/White/Sliver+Gold

**Material**

Aluminium



**TECHNICAL CHARACTERISTICS**

**Light source**



Light source: Luminus CXM-6  
Output (W): 4.3W (120mA 36V )  
Total power consumption (W): 5W  
Color temperature: 2700K/3000K/4000K  
CRI: ≥90  
Photobiological risk: RG1  
Real Lumen: 181.58  
Qty Leds: 1  
Lm/Real W: 36  
Life Time: 50.000h L90B20  
MacAdam steps: 3  
UGR: 12

**GEAR**

This product is supplied with gear.  
Eaglerise non dimmable driver CS-12-  
120mA SB1 120mA 28-42VDC

**Luminaire**

Wall light suitable for indoor and outdoor area  
crossing: No  
Warranty: 5 Years

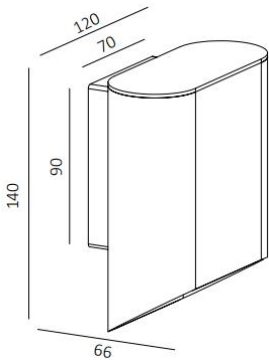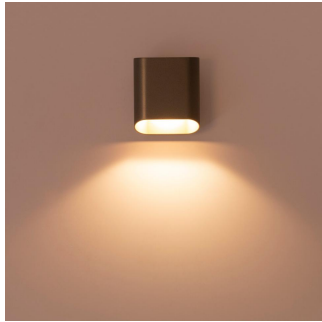

**LIGHT DISTRIBUTION for 3000K medium 71°**

h(m)	E(lx)	Ø(m)
1	8.08	Ø0.89
2	2.02	Ø1.79
3	0.89	Ø2.68
4	0.50	Ø3.57
5	0.32	Ø4.47



The photograph may not match the reference exactly. Please read the product description to identify the finish.