


Wall Brick Diffused 200

-  IP65
-  Class I
-  Wall Surface
-  RG1 | Blue light
-  Altamente riciclabile
Highly recyclable
-  FSC
Package

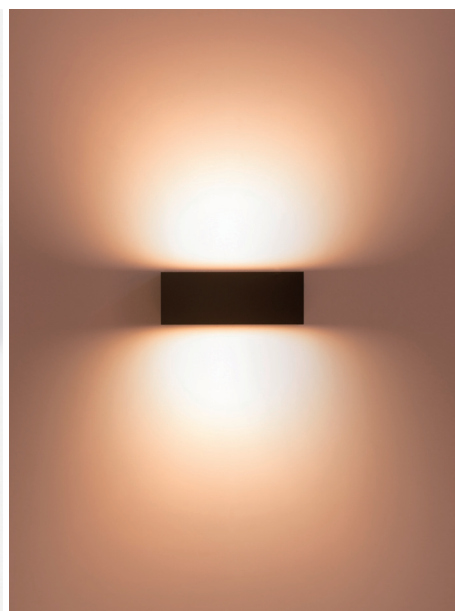


12.6Watt Wall light with CCT and Single/Double Switch for Outdoor

Code	System Power	LED Power	Lumens(at 3000K)	CRI	Lifetime (Ta 25°C)
WL3286	14.8W	350mA 36V	1110lm	>90	50.000h L90B10

Finish	LED CCT	Beam
<input type="checkbox"/> 101 Textured White	<input type="checkbox"/> 2700K	<input type="checkbox"/> Flood
<input type="checkbox"/> 102 Textured Black	<input type="checkbox"/> 3000K	
	<input type="checkbox"/> 4000K	

Key Information	
Material	Aluminium
Mounting	Wall Surface
Warranty	5 Year



Light Distribution for 3000K

wide 90°

h(m)	E(lx)	o(m)
1	46.92	o2.00
2	11.73	o4.00
3	5.214	o6.00
4	2.933	o8.00
5	1.877	o10.00

Gear
This product is supplied with Built-in on/off, phase-cut dim or DALI driver.