

WL3296-0600

15W LED Mirror light

Description

Easy maintenance;
Low-glare;
Indoor and bathroom use;

Finish

Black/White

Material

Aluminium



TECHNICAL CHARACTERISTICS

Light source

Light source: Osram SMD LEDs
Output (W): 14.4W (600mA 24V)
Total power consumption (W): 15W
Color temperature: 3000K/4000K
CRI: 90
Photobiological risk: RG1
Real Lumen: 861.35lm
Qty Leds: 1
Lm/Real W: 57.42lm
Life Time: 50.000h L90B20
MacAdam steps: 3
UGR: <19

Gear

ACTEC Triac dimmable driver
RS-25-600T 600MA 21-42V

Luminaire


Downlight suitable for indoor and bathroom area
Crossing: No
Warranty: 5 Years

LIGHT DISTRIBUTION for 3000K

h(m)	E(lx)	Ø(m)
1	88.61	Ø9.51
2	22.15	Ø19.03
3	9.85	Ø28.55
4	5.54	Ø38.07
5	3.55	Ø47.58

LIGHT DISTRIBUTION for 4000K

h(m)	E(lx)	Ø(m)
1	62.43	Ø6.50
2	15.61	Ø13.00
3	6.940	Ø19.49
4	3.900	Ø25.99
5	2.500	Ø32.48

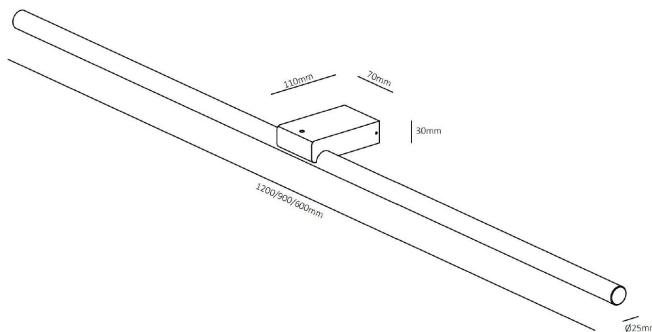

The photograph may not match the reference exactly. Please read the product description to identify the finish.