


## WL3298

### 2\*5W Led Up And Down Wall Light

#### Description

Up and down wall light  
IP65  
Size: 75\*100\*200mm

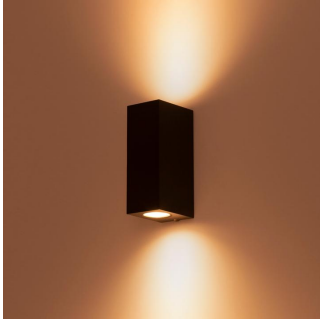

#### Finish

Black/White

#### Material

Aluminium



24D

38D

60D

#### TECHNICAL CHARACTERISTICS

##### Light source


Light source: EVERCORE COB  
Output (W): 2\*4.5W(250mA 36V)  
Total power consumption (W): 2\*5W  
Color temperature: 2700K 3000K CCT Switch  
RI: 90  
Photobiological risk: RG1  
Real Lumen: 720lm  
Qty Leds: 1  
Lm/Real W: 72  
Life Time: 50.000h L90B10  
MacAdam steps: 3  
UGR: 19

##### GEAR

This product is supplied with gear  
Built-in Sunricher dali dimmable  
SRPY-2305N-15CC200-700 250mA 20-42V  
Triac dimmable are available as per request

##### Luminaire

Downlight suitable for outdoor area  
crossing: No  
Warranty: 5 Years

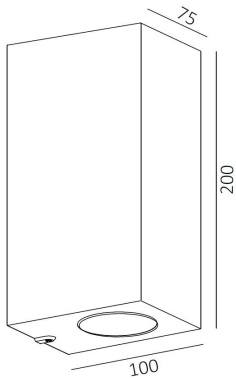

The photograph may not match the reference exactly. Please read the product description to identify the finish.