
## Step Flush 83

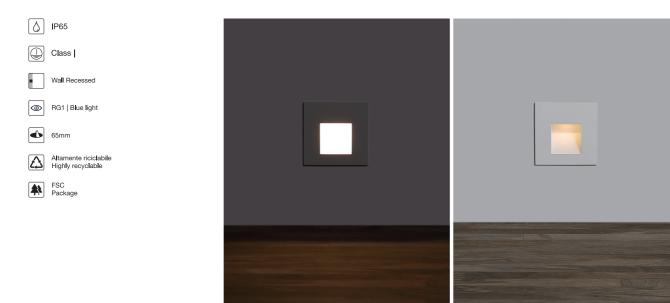

## 1.5Watt Square Recessed Step Light with Interchangeable Bezel

| Code  | System Power                                      | LED Power | Lumens(at 3000K)  | CRI                            | Lifetime (Ta 25°C) |
|---|---|-----------|-------------------|--------------------------------|--------------------|
| WL3019  | 2W  | 500mA 3V  | 110 <b>l</b> m    | >90                            | 50.000h L90B10     |
| Finish  | LED CCT   | Beam      | Key Information   |                                |                    |
| 101 Textured White  | 2 Textured Black 3000K                            | wide      | Material          | Aluminium                      |                    |
| 102 Textured Black  |   |           | Mounting          | Wall Recessed                  |                    |
|   | 4000K   |           | Warranty          | 5 Year                         | 83 3/10            |
| Light Distribution for 2700K  |   |           | Gear              | Gear                           |                    |
| kide 48°   h(m) E(lx)   1 25.74   2 6.436   3 2.860   4 1.609   5 1.030 | o(m)<br>o0.89<br>o1.78<br>o2.67<br>o3.57<br>o4.46 |           | This product is s | supplied with built-in driver. |                    |