






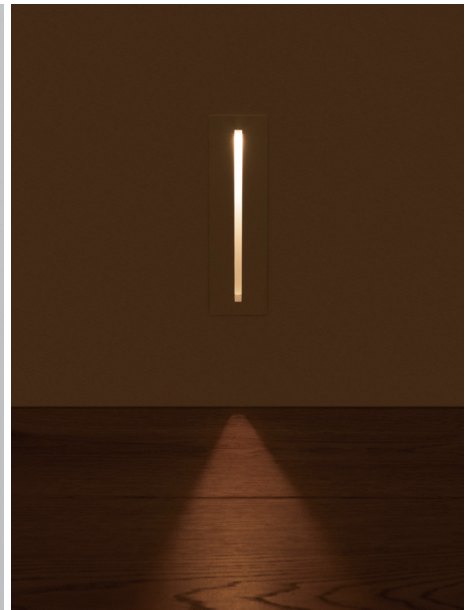



Step Slim Slide 200

-  IP65
-  Class I
-  Wall Recessed
-  RG1 | Blue light
-  40x166mm
-  Altamente riciclabile
Highly recyclable
-  FSC
Package




2Watt Rectangular Step Light for Outdoor

| Code | System Power | LED Power | Lumens(at 3000K) | CRI | Lifetime (Ta 25°C) |
|--------|--------------|-----------|------------------|-----|--------------------|
| WLS109 | 3W | 700mA 3V | 140lm | >90 | 50.000h L90B10 |

| Finish | LED CCT | Beam |
|---------------------------------------------|--------------------------------|-------------------------------------------------------------------------------------|
| <input type="checkbox"/> 101 Textured White | <input type="checkbox"/> 2700K |  |
| <input type="checkbox"/> 102 Textured Black | <input type="checkbox"/> 3000K | |
| | <input type="checkbox"/> 4000K | |

| Key Information | |
|-----------------|---------------|
| Material | Aluminium |
| Mounting | Wall Recessed |
| Warranty | 5 Year |



Light Distribution for 3000K

wide 41.7°

| h(m) | E(lx) | o(m) |
|------|-------|-------|
| 1 | 8.825 | ø0.76 |
| 2 | 2.206 | ø1.52 |
| 3 | 0.980 | ø2.29 |
| 4 | 0.551 | ø3.05 |
| 5 | 0.353 | ø3.81 |

Gear

This product is supplied without built-in driver.