










Step Diffused 50

-  IP65
-  Class III
-  Wall Surface
-  RG1 | Blue light
-  Altamente riciclabile
Highly recyclable
-  FSC
Package

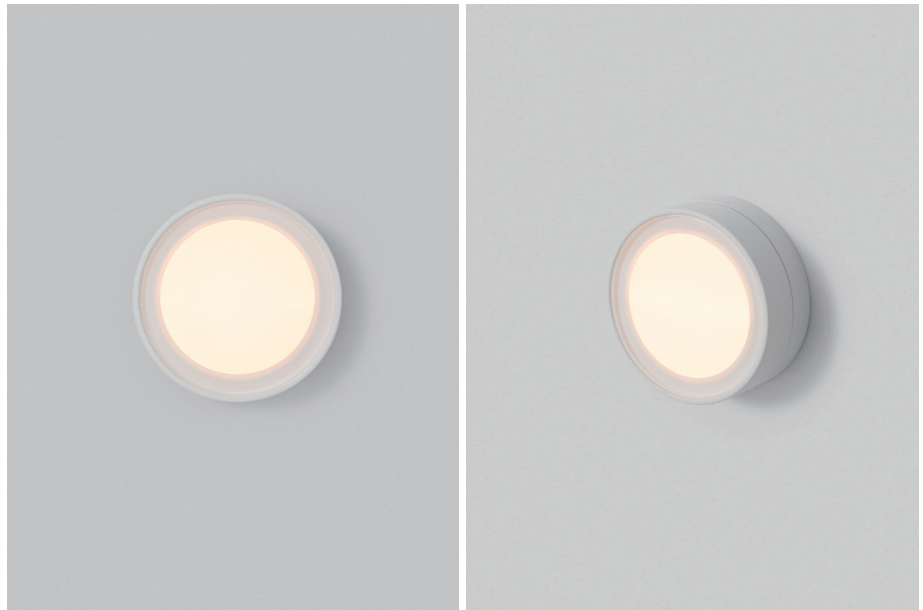


2Watt Surface Diffused Step Light

Code	System Power	LED Power	Lumens(at 3000K)	CRI	Lifetime (Ta 25°C)
WL3185	2W	24V	65lm	>90	50.000h L90B10

Finish	LED CCT	Beam
<input type="checkbox"/> 101 Textured White	 2700K	 wide
<input type="checkbox"/> 102 Textured Black	 3000K	
	 4000K	

Key Information	
Material	Aluminium
Mounting	Wall Surface
Warranty	5 Year



Light Distribution for 3000K

wide 111°

h(m)	E(lx)	o(m)
1	16.68	o2.91
2	4.095	o5.83
3	1.820	o8.74
4	1.024	o11.66
5	0.655	o14.57

Gear
This product is supplied without power supply.