

**BS3094**

**Elle 2W DC24V LED Floor Washer**




**Description**

Downlight for outdoor use .  
IP67  
SUS316

**Finish**  
Black/White

**Material**  
Aluminium;  
Glass;  
SUS316



**TECHNICAL CHARACTERISTICS**

**Light source**


Light source: Osram SSL150  
Output (W): 2W 500mA DC24V  
Total power consumption (W): 2W  
Color temperature: 2700K/3000K/4000K  
CRI: 80/90  
Photobiological risk: RG1  
Real Lumen: 75LM  
Qty Leds: 1  
Lm/Real W: 37.5  
Life Time: 50.000h L90B20  
MacAdam steps: 3  
UGR: 19

**GEAR**

This product is supplied without gear

**Luminaire**

crossing: No  
Warranty: 5 Years

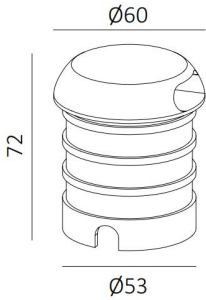

55mm  
5-25mm

**LIGHT DISTRIBUTION for 2700K 20X40°**

h(m)	E(lx)	Ø(m)
1	131.0	Ø0.35
2	32.75	Ø0.70
3	14.56	Ø1.05
4	8.180	Ø1.40
5	5.240	Ø1.75


Photometric 2700K 20X40D Ra.90



The photograph may not match the reference exactly. Please read the product description to identify the finish.

**BS3162**

**Elle 2W 2Way DC24V LED Floor Washer**

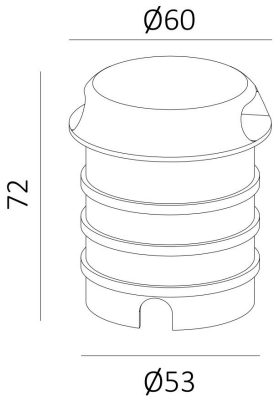


○ 55mm  
▨ 5-25mm

**Description**

Downlight for outdoor use .  
IP67  
SUS316

**Finish**  
Black/White

**Material**  
Aluminium;  
Glass;  
SUS316



**TECHNICAL CHARACTERISTICS**

**Light source**

Light source: Osram SSL150  
Output (W): 2W 500mA DC24V  
Total power consumption (W): 2W  
Color temperature: 2700K/3000K/4000K  
CRI: 80/90  
Photobiological risk: RG1  
Real Lumen: 75LM  
Qty Leds: 2  
Lm/Real W: 37.5  
Life Time: 50.000h L90B20  
MacAdam steps: 3  
UGR: 19

**GEAR**

This product is supplied without gear

**Luminaire**

crossing: No  
Warranty: 5 Years

**LIGHT DISTRIBUTION for 2700K 20X40°**

h(m)	E(lx)	Ø(m)
1	131.0	Ø0.35
2	32.75	Ø0.70
3	14.56	Ø1.05
4	8.180	Ø1.40
5	5.240	Ø1.75

Photometric 2700K 20X40D Ra.90

The photograph may not match the reference exactly. Please read the product description to identify the finish.