

BS3136/BS3137

0.5W IP65 DC24V/48V Spike Light

Description

Low UGR Design;
DC24V/48V Two version;
H800 and H1200 two size;
Flexible tube design;

Finish
Black

Material
Aluminium
PMMA Diffuser
Polycarbonate Tube



TECHNICAL CHARACTERISTICS

Light source




Light source: SMD LED chip
ChipOutput (W): DC24V/48V 0.5W
Total power consumption (W): 0.5W
Color temperature:2700K/3000K/4000K
CRI: 90
Photobiological risk: RG1
Real Lumen: 30lm
Qty Leds: 1
Lm/Real W: 40
Life Time: 50.000h L90B20
MacAdam steps: 3
UGR:<9

Gear

This product is supplied without gear.

Luminaire

IP65 for outdoor purpose
crossing: No
Warranty: 5 Years

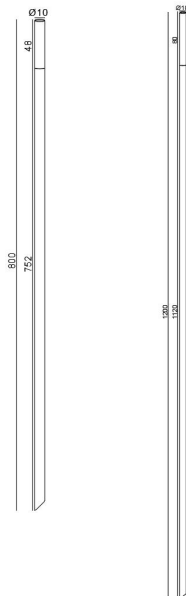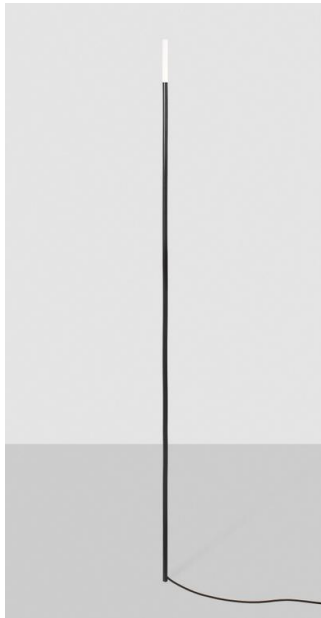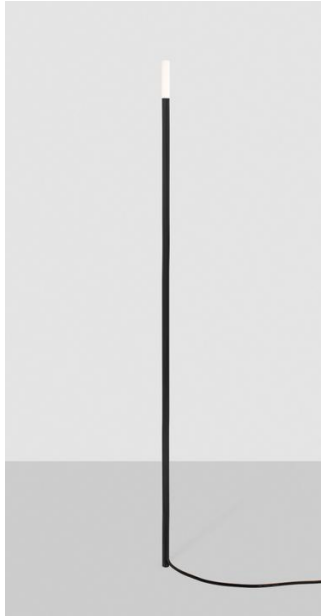

The photograph may not match the reference exactly. Please read the product description to identify the finish.