






Embedded Tilt 58

-  IP67
-  Class III
-  Ground Embedded
-  RG1 | Blue light
-  52mm
-  Altamente riciclabile
Highly recyclable
-  FSC
Package
-  You can step on it




3Watt Embedded Tiltable Uplight

Code	System Power	LED Power	Lumens(at 3000K)	CRI	Lifetime (Ta 25°C)
BS3151	3W	24V	150lm	>90	50.000h L80B20

Finish	LED CCT	Beam
Powder Coat	 2700K	 15°
Solid Material	 3000K	 36°
	 4000K	

Key Information	
Material	Aluminium, Glass, SUS316
Mounting	Embedded
Warranty	5 Year




Light Distribution for 3000K


medium 24°

h(m)	E(lx)	o(m)
1	181.6	ø0.38
2	45.40	ø0.79
3	20.10	ø1.14
4	11.30	ø1.52
5	7.000	ø1.90

Gear
This product is supplied without gear.

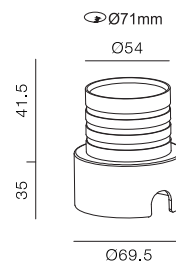

Accessories

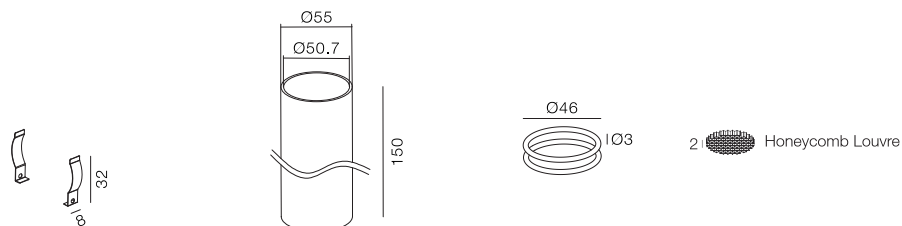

Optional spring mounting

Note: recess housing cap be cut