

BS3176

IP65 3Watt DC24V Spike Light

Description

24V constant voltage dimming;
0-90D adjustable;
Spike, surface mounted, and tree stape different installation;
Honeycomb louver as accessory;
Wall washer snoot as accessory;

Finish
Black/White

Material
Aluminium



TECHNICAL CHARACTERISTICS

Light source


Light source: Luminus CXM-4
Input: DC24V constant voltage
Output (W): 3W
Total power consumption (W): 155Watt
Color temperature: 2700K/3000K/4000K
CRI: 90
Photobiological risk: RG1
Real Lumen: 155
Qty Leds: 1
Lm/Real W: 52
Life Time: 50.000h L80B20
MacAdam steps: 3
UGR: <14

GEAR

This product is supplied without gear.

Luminaire


IP65 for outdoor purpose
crossing: No
Warranty: 5 Years

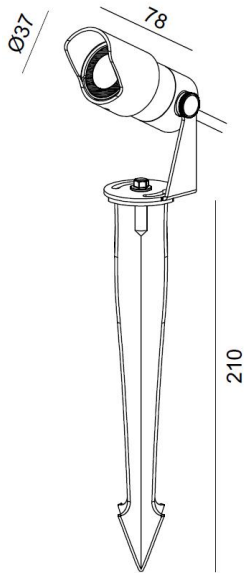

PHOTOMETRIC DATA

LIGHT DISTRIBUTION for 3000K
medium 36.1°

h(m)	E(lx)	Ø(m)
1	311	Ø0.55
2	77	Ø1.11
3	34	Ø1.67
4	19	Ø2.23
5	12	Ø2.78

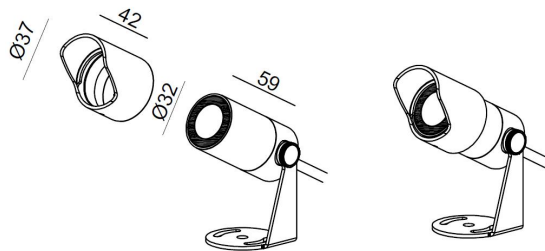

The photograph may not match the reference exactly. Please read the product description to identify the finish.

BS3177

IP65 10Watt DC24V Spike Light

Description

24V constant voltage dimming;
0-90D adjustable;
Spike, surface mounted, and tree stape different installation;
Honeycomb louver as accessory;
Wall washer snoot as accessory;

Finish
Black/White

Material
Aluminium



TECHNICAL CHARACTERISTICS

Light source

Light source: Luminus CXM-6
Input: DC24V constant voltage
Output (W): 10W
Total power consumption (W): 10Watt
Color temperature: 2700K/3000K/4000K
CRI: 90
Photobiological risk: RG1
Real Lumen: 370
Qty Leds: 1
Lm/Real W: 37
Life Time: 50.000h L80B20
MacAdam steps: 3
UGR: <14

GEAR

This product is supplied without gear.




Luminaire

IP65 for outdoor purpose
crossing: No
Warranty: 5 Years

PHOTOMETRIC DATA


LIGHT DISTRIBUTION for 3000K
medium 36.1°

h(m)	E(lx)	Ø(m)
1	885	Ø0.55
2	221	Ø1.07
3	98	Ø1.60
4	55	Ø2.14
5	35	Ø2.68

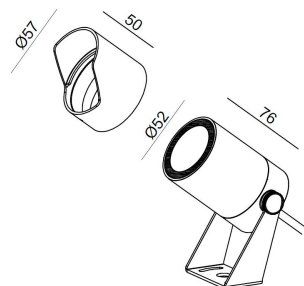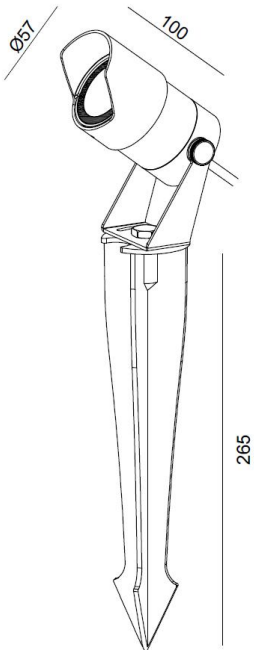

BS3178

IP65 17Watt DC24V Spike Light

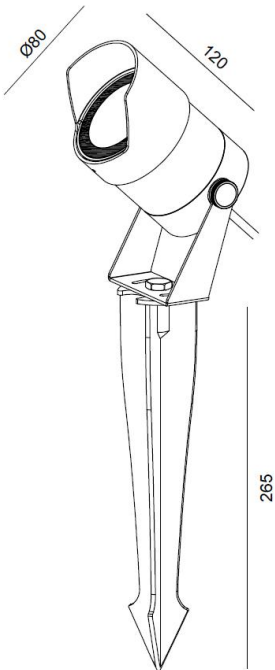

Description

24V constant voltage dimming;
0-90D adjustable;
Spike, surface mounted, and tree stape different installation;
Honeycomb louver as accessory;
Wall washer snoot as accessory;

Finish
Black/White

Material
Aluminium



TECHNICAL CHARACTERISTICS

Light source

Light source: Luminus CXM-9
Input: DC24V constant voltage
Output (W): 17W
Total power consumption (W): 17Watt
Color temperature: 2700K/3000K/4000K
CRI: 90
Photobiological risk: RG1
Real Lumen: 733
Qty Leds: 1
Lm/Real W: 43
Life Time: 50.000h L80B20
MacAdam steps: 3
UGR: <14

GEAR

This product is supplied without gear.


Luminaire

IP65 for outdoor purpose
crossing: No
Warranty: 5 Years

PHOTOMETRIC DATA

LIGHT DISTRIBUTION for 3000K
medium 36.1°

h(m)	E(lx)	Ø(m)
1	1178	Ø0.74
2	294	Ø1.48
3	130	Ø2.22
4	73	Ø2.96
5	47	Ø3.71

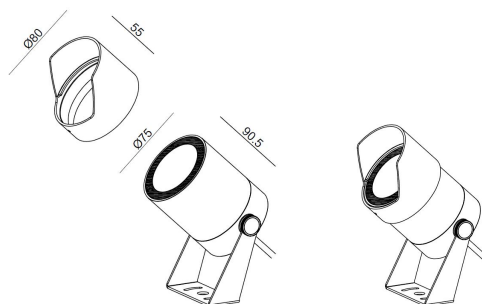

The photograph may not match the reference exactly. Please read the product description to identify the finish.