

DL6102

4W 1Head Trim Downlight

Description

Discreet yet powerful;
blending effortlessly into ceilings;
for minimalist sophistication;
easy to install.

Finish

Black/White

Material

Aluminium



40D

60D

80D

TECHNICAL CHARACTERISTICS

Light source

Light source: Bridgelux SMD2835

Output (W): 3.6W(100mA 36V)

Total power consumption (W): 4W

Color temperature: 2700K/3000K/4000K

CRI: 90

Photobiological risk: RG1

Real Lumen: 281.04lm

Qty Leds: 1

Lm/Real W: 65.60lm

Life Time: 50.000h L90B20

MacAdam steps: 3

UGR: 19



Gear

This product is supplied without gear.

Luminaire

Crossing: No

Warranty: 5 Years

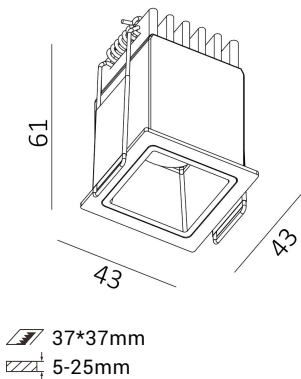



LIGHT DISTRIBUTION for 3000K

Wide 80°

h(m)	E(lx)	Ø(m)
1	214.6	Ø1.41
2	53.65	Ø2.82
3	23.84	Ø4.23
4	13.41	Ø5.64
5	8.583	Ø7.05

The photograph may not match the reference exactly. Please read the product description to identify the finish.



64*37mm
5-25mm

DL6103

6W 2Heads Trim Downlight

Description

Discreet yet powerful;
blending effortlessly into ceilings;
for minimalist sophistication;
easy to install.

Finish

Black/White

Material

Aluminium



40D

60D

80D

TECHNICAL CHARACTERISTICS

Light source

Light source: Bridgelux SMD2835

Output (W): 5.4W(150mA 36V)

Total power consumption (W): 6W

Color temperature: 2700K/3000K/4000K

CRI: 90

Photobiological risk: RG1

Real Lumen: 423.08lm

Qty Leds: 2

Lm/Real W: 68lm

Life Time: 50.000h L90B20

MacAdam steps: 3

UGR: 19

Gear

This product is supplied without gear.

Luminaire

Crossing: No

Warranty: 5 Years

LIGHT DISTRIBUTION for 3000K

Wide 80°

h(m)	E(lx)	Ø(m)
1	332.7	Ø1.36
2	83.18	Ø2.73
3	36.97	Ø4.10
4	20.80	Ø5.47
5	13.31	Ø6.83

The photograph may not match the
reference exactly. Please read the
product description to identify the finish.

DL6104

8W 4Heads Trim Downlight

Description

Discreet yet powerful;
blending effortlessly into ceilings;
for minimalist sophistication;
easy to install.

Finish
Black/White

Material
Aluminium



40D

60D

80D

TECHNICAL CHARACTERISTICS

Light source


Light source: Bridgelux SMD2835
Output (W): 7.2W(200mA 36V)
Total power consumption (W): 8W
Color temperature: 2700K/3000K/4000K
CRI: 90
Photobiological risk: RG1
Real Lumen: 570.41lm
Qty Leds: 4
Lm/Real W: 71.50lm
Life Time: 50.000h L90B20
MacAdam steps: 3
UGR: 19

Gear

This product is supplied without gear.

Luminaire

Crossing: No
Warranty: 5 Years



63*63mm
5-25mm

LIGHT DISTRIBUTION for 3000K Wide 80°

h(m)	E(lx)	Ø(m)
1	467.6	Ø1.36
2	116.9	Ø2.73
3	51.95	Ø4.09
4	29.22	Ø5.46
5	18.70	Ø6.82

The photograph may not match the
reference exactly. Please read the
product description to identify the finish.

DL6105

15W 9Heads Trim Downlight

Description

Discreet yet powerful;
blending effortlessly into ceilings;
for minimalist sophistication;
easy to install.

Finish

Black/White

Material

Aluminium



40D

60D

80D

TECHNICAL CHARACTERISTICS

Light source

Light source: Bridgelux SMD2835

Output (W): 12.6W(350mA 36V)

Total power consumption (W): 15W

Color temperature: 2700K/3000K/4000K

CRI: 90

Photobiological risk: RG1

Real Lumen: 1256.5lm

Qty Leds: 9

Lm/Real W: 95.20lm

Life Time: 50.000h L90B20

MacAdam steps: 3

UGR<19


Gear

This product is supplied without gear.

Luminaire

Crossing: No

Warranty: 5 Years



90*90mm
5-25mm

LIGHT DISTRIBUTION for 3000K Narrow 40°

h(m)	E(lx)	Ø(m)
1	3335	Ø0.65
2	833.6	Ø1.30
3	370.5	Ø1.95
4	208.4	Ø2.60
5	133.4	Ø3.25

The photograph may not match the
reference exactly. Please read the
product description to identify the finish.



DL6106

18W 10Heads Trim Downlight

Description

Discreet yet powerful;
blending effortlessly into ceilings;
for minimalist sophistication;
easy to install.

Finish

Black/White

Material

Aluminium



40D

60D

80D

TECHNICAL CHARACTERISTICS

Light source

Light source: Bridgelux SMD2835

Output (W): 18W(500mA 36V)

Total power consumption (W): 18W

Color temperature: 2700K/3000K/4000K

CRI: 90

Photobiological risk: RG1

Real Lumen: 1829.1lm

Qty Leds: 10

Lm/Real W: 97.22lm

Life Time: 50.000h L90B20

MacAdam steps: 3

UGR<19

Gear

This product is supplied without gear.

Luminaire


Crossing: No

Warranty: 5 Years


LIGHT DISTRIBUTION for 3000K Narrow 40°

h(m)	E(lx)	Ø(m)
1	4822	Ø0.63
2	1205	Ø1.27
3	535.7	Ø1.91
4	301.4	Ø2.55
5	301.4	Ø3.19

Sketch

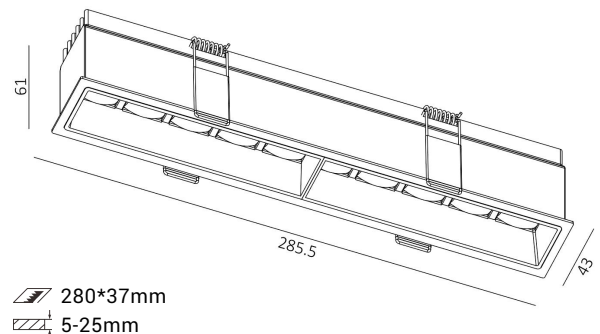

The photograph may not match the
reference exactly. Please read the
product description to identify the finish.



115*37mm
5-25mm

DL6098

10W 5Heads Trim Downlight

Description

Discreet yet powerful;
blending effortlessly into ceilings;
for minimalist sophistication;
easy to install.

Finish

Black/White

Material

Aluminium



40D

60D

80D

TECHNICAL CHARACTERISTICS

Light source

Light source: Bridgelux SMD2835

Output (W): 9W(250mA 36V)

Total power consumption (W): 10W

Color temperature: 2700K/3000K/4000K

CRI: 90

Photobiological risk: RG1

Real Lumen: 721.92lm

Qty Leds: 5

Lm/Real W: 74.54lm

Life Time: 50.000h L90B20

MacAdam steps: 3

UGR: 19

Gear

This product is supplied without gear.

Luminaire


Crossing: No

Warranty: 5 Years

LIGHT DISTRIBUTION for 3000K Wide 80°

h(m)	E(lx)	Ø(m)
1	571.2	Ø1.33
2	142.8	Ø2.67
3	63.47	Ø4.00
4	35.70	Ø5.34
5	22.85	Ø6.68

The photograph may not match the
reference exactly. Please read the
product description to identify the finish.



115*37mm
5-25mm

DL6198--Trimless

10W 5Heads Trimless Downlight

Description

Discreet yet powerful;
blending effortlessly into ceilings;
for minimalist sophistication;
easy to install.

Finish

Black/White

Material

Aluminium



40D

60D

80D

TECHNICAL CHARACTERISTICS

Light source

Light source: Bridgelux SMD2835

Output (W): 9W(250mA 36V)

Total power consumption (W): 10W

Color temperature: 2700K/3000K/4000K

CRI: 90

Photobiological risk: RG1

Real Lumen: 919.31lm

Qty Leds: 5

Lm/Real W: 94.71lm

Life Time: 50.000h L90B20

MacAdam steps: 3

UGR<19

Gear

This product is supplied without gear.

Luminaire

Crossing: No

Warranty: 5 Years

LIGHT DISTRIBUTION for 3000K

Narrow 40°

h(m)	E(lx)	Ø(m)
1	2361	Ø0.64
2	590.3	Ø1.29
3	262.4	Ø1.94
4	147.6	Ø2.59
5	94.45	Ø3.24

The photograph may not match the
reference exactly. Please read the
product description to identify the finish.