

SD3304

4W 1Head Rectangle Surface Mounted Light

Description

Stylish Design;
90D Tiltable & 350D Rotate;
Tunable white Available
IP21;

Finish
Black/White

Material
Aluminium



40D

60D

80D

TECHNICAL CHARACTERISTICS

Light source

Light source: Bridgelux SMD2835
Output (W): 3.6W (100mA 36V)
Total power consumption (W): 4W
Color temperature: 2700K/3000K/4000K
CRI: 90
Photobiological risk: RG1
Real Lumen: 281.04lm
Qty Leds: 1
Lm/Real W: 65.60lm
Life Time: 50.000h L90B20
MacAdam steps: 3
UGR: <19

Gear

This product is supplied with gear.
Built in ACTEC non dimmable driver


Luminaire

Crossing: No
Warranty: 5 Years


LIGHT DISTRIBUTION for 3000K
Wide 80°

h(m)	E(lx)	Ø(m)
1	214.6	Ø1.41
2	53.65	Ø2.82
3	23.84	Ø4.23
4	13.41	Ø5.64
5	8.583	Ø7.05

Sketch

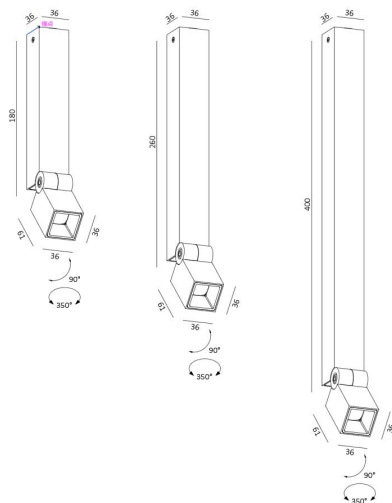

The photograph may not match the reference exactly. Please read the product description to identify the finish.



SD3305

8W 5Heads Rectangle Surface Mounted Downlight

Description

Downlight for indoor use;
Slim body design.
Stylish Design;
Tunable white Available;
IP21;

Finish

Black/White

Material

Aluminium



40D

60D

80D

TECHNICAL CHARACTERISTICS

Light source

Light source: Bridgelux SMD2835
Output (W): 7.2W(200mA 36V)
Total power consumption (W): 8W
Color temperature: 2700K/3000K/4000K
CRI: 90
Photobiological risk: RG1
Real Lumen: 625.97lm
Qty Leds: 5
Lm/Real W: 62.41lm
Life Time: 50.000h L90B20
MacAdam steps: 3
UGR: <19

Gear

This product is supplied with gear.
Built in ACTEC non dimmable driver


Luminaire

Crossing: No
Warranty: 5 Years

LIGHT DISTRIBUTION for 3000K Wide 80°

h(m)	E(lx)	Ø(m)
1	595.6	Ø0.97
2	148.9	Ø1.94
3	66.18	Ø2.92
4	37.23	Ø3.89
5	23.83	Ø4.87

The photograph may not match the
reference exactly. Please read the
product description to identify the finish.

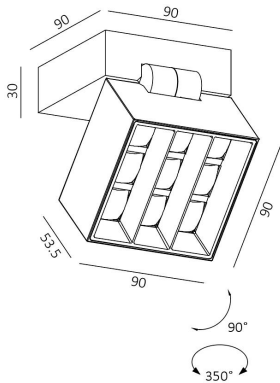

SD3306

15W 9Head Square Adjustable Surface Mounted Light

Description

Stylish Design;
350D Rotate & 90D Tilt;
Tunable white Available;
IP21;

Finish

Black/White

Material

Aluminium



40D

60D

80D

TECHNICAL CHARACTERISTICS

Light source

Light source: Bridgelux SMD2835
Output (W): 12.6W(350mA 36V)
Total power consumption (W): 15W
Color temperature: 2700K/3000K/4000K
CRI: 90
Photobiological risk: RG1
Real Lumen: 1256.5lm
Qty Leds: 9
Lm/Real W: 95.20lm
Life Time: 50.000h L90B20
MacAdam steps: 3
UGR: <19

Gear

This product is supplied with gear.
Built in ACTEC non dimmable driver

Luminaire

Crossing: No
Warranty: 5 Years

LIGHT DISTRIBUTION for 3000K Narrow 40°

h(m)	E(lx)	Ø(m)
1	3335	Ø0.65
2	833.6	Ø1.30
3	370.5	Ø1.95
4	208.4	Ø2.60
5	133.4	Ø3.25

The photograph may not match the reference exactly. Please read the product description to identify the finish.