
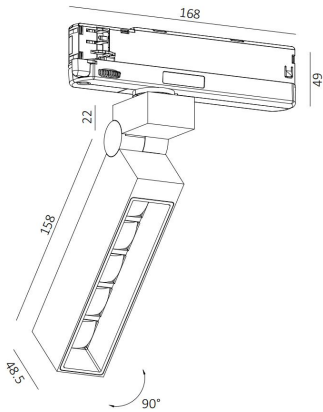


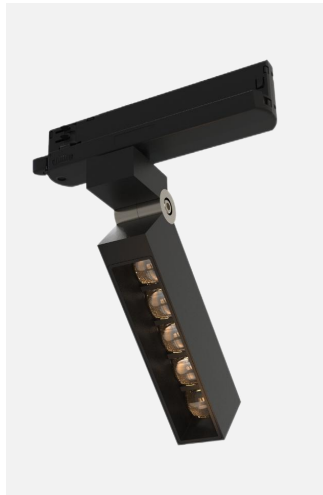

TR3160

10W 5Head 3Phase Track Light

Description

4 wires 3 circuit adaptor;
Stylish Design;
Extreme low glare;
Tunable white Available;
IP21;

Finish

Black/White

Material

Aluminium



40D

60D

80D

TECHNICAL CHARACTERISTICS

Light source

Light source: Bridgelux SMD2835

Output (W): 9W(250mA 36V)

Total power consumption (W): 10W

Color temperature: 2700K/3000K/4000K

CRI: 90

Photobiological risk: RG1

Real Lumen: 721.92lm

Qty Leds: 5

Lm/Real W: 74.54lm

Life Time: 50.000h L90B20

MacAdam steps: 3

UGR: <19

GEAR

This product is supplied with gear.

With BOKE 3 phase Track adaptor-on/off

BK-PTL030S-AHC0700ASX 250mA 10-42V

Luminaire


Crossing: No

Warranty: 5 Years

LIGHT DISTRIBUTION for 3000K Wide 80°

h(m)	E(lx)	Ø(m)
1	571.2	Ø1.33
2	142.8	Ø2.67
3	63.47	Ø4.00
4	35.70	Ø5.34
5	22.85	Ø6.68

The photograph may not match the reference exactly. Please read the product description to identify the finish.

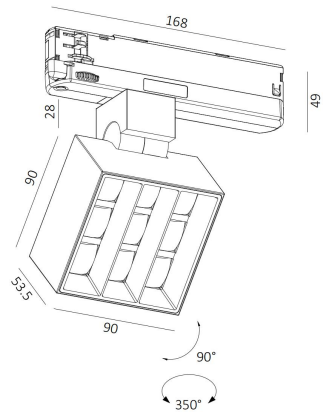

TR3161

15W 9Head 3Phase Track Light

Description

4 wires 3 circuit adaptor;
Stylish Design;
Extreme low glare;
350D Rotate & 90D Tilt;
Tunable white Available;

Finish

Black/White

Material

Aluminium



40D

60D

80D

TECHNICAL CHARACTERISTICS

Light source

Light source: Bridgelux SMD2835
Output (W): 12.6W(350mA 36V)
Total power consumption (W): 15W
Color temperature: 2700K/3000K/4000K
CRI: 90
Photobiological risk: RG1
Real Lumen: 1256.5lm
Qty Leds: 9
Lm/Real W: 95.20lm
Life Time: 50.000h L90B20
MacAdam steps: 3
UGR: <19

Gear

This product is supplied with gear.
With BOKE 3 phase Track adaptor--on/off
BK-PTL030S-AHC0700ASX 350mA 10-42V

Luminaire

Crossing: No
Warranty: 5 Years

LIGHT DISTRIBUTION for 3000K Narrow 40°

h(m)	E(lx)	Ø(m)
1	3335	Ø0.65
2	833.6	Ø1.30
3	370.5	Ø1.95
4	208.4	Ø2.60
5	133.4	Ø3.25

The photograph may not match the reference exactly. Please read the product description to identify the finish.