

Product Description: 10W Trimless Single Square Downlight
Model: DL3108



Technical Data

Light source	Citizen CLU028
System wattage	10W (250mA, 36V)
Lumen flux	500lm (10W, 36D, 3000K, Ra.90)
Colour temperature	2700K, 3000K, 4000K
Colour rendering index	Ra≥90
Chromaticity rate	3 MacAdam
Beam angle	24D, 36D, 60D, Lens Type
Service lifetime	50,000hrs, L70
Ingress protection	IP21 Installed
Operation voltage	220-240Vac, 50/60Hz
Operation temperature	-20~40D
Protection class	III
Finishing	White RAL9016, Gloss 5 Black RAL9005, Gloss 5
Construction	Aluminum
Mounting	Ceiling Recessed, trimless type
Warranty	5 years
Lighting control	Tridonic non-dim, ECG standard Actec triac dim 0-10V, Dali diming upon request

Ordering Data

DL3108					
Model	Finish	Power	CCT	CRI	Beam
	• AW • AB	• 10	• 27 • 30 • 40	• R80 • R90	• 24D • 36D • 60D


Features

- Slim body design
- Trimless design
- Interchangeable honeycomb bezel

Accessories

- Honeycomb

Diagram

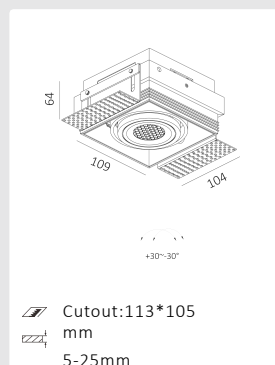

LIGHT DISTRIBUTION for 3000K medium 36°

h(m)	E(lx)	Ø(m)
1	1468	Ø0.64
2	367.1	Ø1.27
3	163.2	Ø1.91
4	91.8	Ø2.55
5	58.7	Ø3.19

Photometric 3000K 36D Ra.90