


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:220.64V I:0.2454A P:31.632W PF:0.5842 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2655.22x1 lm		
NAME: DL3350 4000K RA90 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 84*252	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 83.94 lm/W			
MODEL	DL3350 4000K RA90 36D	I _{max} (cd)	4769	S/MH (C0/180)	0.73
NOMINAL POWER (W)	3*10	LOR (%)	100.0	S/MH (C90/270)	0.65
RATED VOLTAGE (V)	220	TOTAL FLUX (lm)	2655.2	η UP, DN (C0-180)	0.3, 51.8
NOMINAL FLUX (lm)	2655.22	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.4, 47.5
LAMPS INSIDE	1	η up (%)	0.8	CIBSE SHR NOM	0.50
TEST VOLTAGE (V)	220	η down (%)	99.2	CIBSE SHR MAX	0.70

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

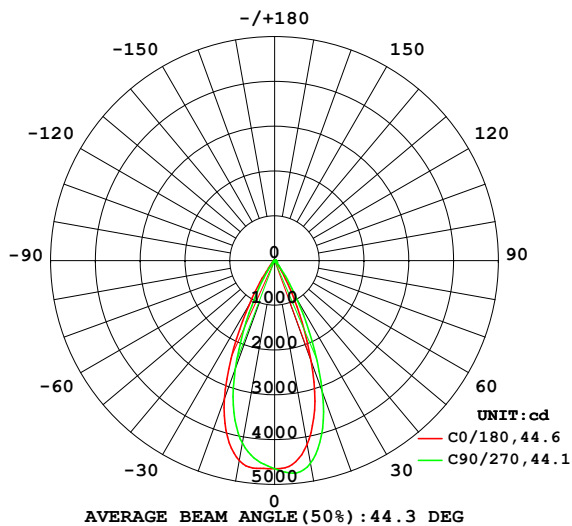

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

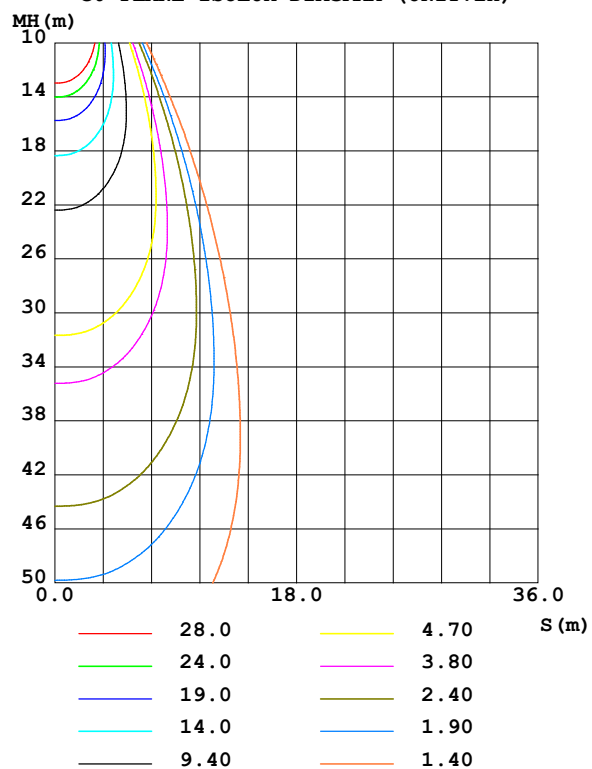

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3 °C
Operators:
Test Date: 2023-06-08

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity: 65.0%
Test Distance: 7.580m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	4175	4391	4602	4627	4534	4325	4147	4102	0- 10	433.1	433.1	16.3,16.3
20	2394	2688	3132	3351	3288	2918	2579	2390	10- 20	1029	1462	55.1,55.1
30	593.9	769.9	1027	1178	1155	925.7	686.2	554.9	20- 30	794.9	2257	85,85
40	97.41	122.2	156.2	169.0	182.8	152.7	118.4	94.57	30- 40	240.0	2497	94.1,94.1
50	49.21	52.42	57.51	62.66	66.58	60.83	54.55	50.42	40- 50	65.01	2562	96.5,96.5
60	31.51	32.47	35.69	37.26	39.91	36.70	33.65	31.40	50- 60	40.41	2603	98,98
70	11.26	12.47	14.85	15.88	16.86	14.30	8.698	10.45	60- 70	23.85	2627	98.9,98.9
80	1.480	2.336	3.039	4.172	4.076	1.866	1.071	0.9323	70- 80	7.597	2634	99.2,99.2
90	0.1210	0.1562	0.1756	0.1720	0.1323	0.1358	0.2029	0.1583	80- 90	0.7193	2635	99.2,99.2
100	0.2353	0.2104	0.1868	0.1742	0.1884	0.1857	0.2190	0.2157	90-100	0.1827	2635	99.2,99.2
110	0.3989	0.3665	0.3304	0.3094	0.3097	0.3307	0.3903	0.4247	100-110	0.2843	2635	99.3,99.3
120	0.7506	0.6603	0.5650	0.5156	0.8151	0.9656	1.231	1.385	110-120	0.5529	2636	99.3,99.3
130	2.146	1.827	1.517	1.360	2.643	3.016	3.593	3.926	120-130	1.398	2637	99.3,99.3
140	5.095	4.527	3.959	3.686	6.035	6.592	7.370	7.791	130-140	3.047	2640	99.4,99.4
150	8.688	8.086	7.479	7.181	10.14	10.68	11.35	11.66	140-150	4.682	2645	99.6,99.6
160	11.53	11.17	10.78	10.50	13.39	13.63	13.96	13.89	150-160	5.049	2650	99.8,99.8
170	13.51	13.34	13.11	12.90	14.77	14.80	14.72	14.61	160-170	3.720	2654	99.9,99.9
180	15.03	15.09	14.80	14.85	15.13	15.17	14.86	14.89	170-180	1.371	2655	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 2535.5 lm

%lum = 95.5%

%lamp = 95.5%

Conical surface Flux(130deg): 2617.2 lm

%lum = 98.6%


%lamp = 98.6%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:
 Test Date:2023-06-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:7.580m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:220.64V I:0.2454A P:31.632W PF:0.5842 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2655.22x1 lm		
NAME: DL3350 4000K RA90 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 84*252	Shielding Angle:

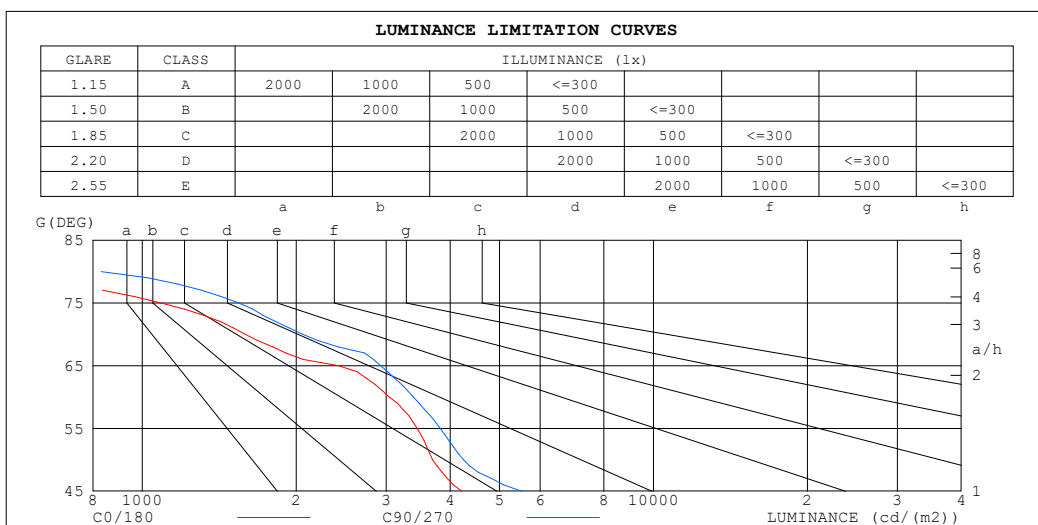


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators:
Test Date: 2023-06-08

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity: 65.0%
Test Distance: 7.580m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.64V I:0.2454A P:31.632W PF:0.5842 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2655.22x1 lm		
NAME: DL3350 4000K RA90 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 84*252	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

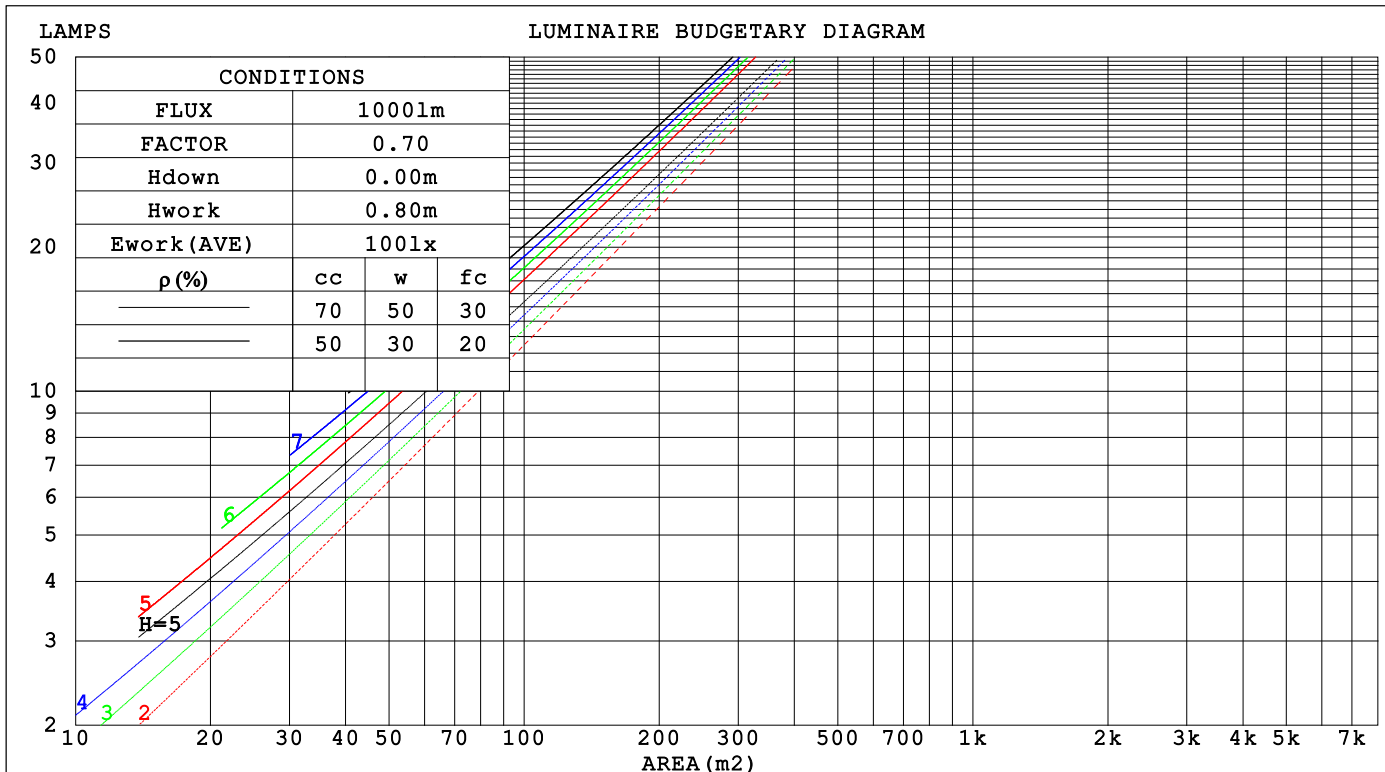

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:
Test Date:2023-06-08

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:7.580m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:220.64V I:0.2454A P:31.632W PF:0.5842 Freq:49.99Hz			UTHDi:0.00% ITHDi:0.00% KDisp:0			Lamp Flux:2655.22x1 lm		
NAME: DL3350 4000K RA90 36D			TYPE:			WEIGHT:		
SPEC.:			DIM.:			SERIAL No.:		
MFR.: VJC Lighting			SUR.: 84*252			Shielding Angle:		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.165	.094	.030	.158	.090	.029	.145	.083	.027	.133	.077	.025	.122	.071	.023		
2.0	.156	.086	.026	.150	.083	.026	.139	.078	.024	.129	.073	.023	.120	.068	.021		
3.0	.147	.078	.024	.143	.076	.023	.133	.072	.022	.125	.068	.021	.117	.065	.020		
4.0	.139	.072	.021	.135	.071	.021	.127	.068	.020	.120	.064	.019	.113	.061	.019		
5.0	.132	.067	.020	.129	.066	.019	.122	.063	.019	.115	.061	.018	.109	.058	.018		
6.0	.126	.063	.018	.123	.062	.018	.117	.060	.017	.111	.058	.017	.106	.056	.017		
7.0	.120	.059	.017	.117	.058	.017	.112	.057	.016	.107	.055	.016	.102	.053	.016		
8.0	.115	.056	.016	.112	.055	.016	.107	.054	.015	.103	.052	.015	.099	.051	.015		
9.0	.110	.053	.015	.108	.052	.015	.103	.051	.014	.099	.050	.014	.096	.049	.014		
10.0	.105	.051	.014	.103	.050	.014	.100	.049	.014	.096	.048	.014	.092	.047	.013		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)										
0.0	.196	.196	.196	.168	.168	.168	.115	.115	.115	.066	.066	.066	.021	.021	.021		
1.0	.176	.163	.152	.151	.140	.131	.103	.096	.090	.059	.056	.053	.019	.018	.017		
2.0	.160	.138	.120	.137	.119	.104	.094	.082	.073	.054	.048	.043	.017	.016	.014		
3.0	.147	.119	.098	.126	.103	.085	.086	.072	.059	.050	.042	.035	.016	.014	.011		
4.0	.136	.105	.081	.117	.090	.070	.080	.063	.049	.046	.037	.029	.015	.012	.010		
5.0	.126	.093	.068	.109	.080	.059	.075	.056	.042	.043	.033	.025	.014	.011	.008		
6.0	.119	.083	.058	.102	.072	.050	.070	.050	.036	.041	.030	.021	.013	.010	.007		
7.0	.112	.075	.050	.096	.065	.044	.066	.046	.031	.039	.027	.018	.012	.009	.006		
8.0	.106	.069	.044	.091	.060	.038	.063	.042	.027	.037	.025	.016	.012	.008	.005		
9.0	.100	.064	.039	.087	.055	.034	.060	.039	.024	.035	.023	.014	.011	.008	.005		
10.0	.096	.059	.035	.083	.051	.030	.057	.036	.022	.033	.021	.013	.011	.007	.004		

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:
Test Date:2023-06-08

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:7.580m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:220.64V I:0.2454A P:31.632W PF:0.5842 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0Lamp Flux:2655.22x1 lm											
NAME: DL3350 4000K RA90 36D					TYPE:			WEIGHT:			
SPEC.:					DIM.:			SERIAL No.:			
MFR.: VJC Lighting					SUR.: 84*252			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	7.6	8.4	7.8	8.6	8.8	9.6	10.4	9.8	10.6	10.8	
	3H	7.9	8.6	8.1	8.8	9.0	9.8	10.5	10.0	10.8	
	4H	7.9	8.6	8.2	8.8	9.1	9.8	10.5	10.1	10.8	
	6H	7.8	8.5	8.1	8.8	9.0	9.8	10.4	10.1	10.7	
	8H	7.8	8.4	8.1	8.7	9.0	9.7	10.4	10.0	10.6	
	12H	7.7	8.4	8.1	8.6	8.9	9.7	10.3	10.0	10.6	
4H	2H	7.7	8.5	8.0	8.7	8.9	9.6	10.3	9.8	10.5	
	3H	8.1	8.7	8.4	9.0	9.3	9.8	10.4	10.1	10.7	
	4H	8.1	8.7	8.5	9.0	9.3	9.9	10.4	10.2	10.8	
	6H	8.1	8.6	8.5	8.9	9.3	9.8	10.4	10.2	10.7	
	8H	8.0	8.5	8.4	8.9	9.2	9.8	10.3	10.2	10.6	
	12H	8.0	8.4	8.4	8.8	9.2	9.7	10.2	10.2	10.6	
8H	4H	8.1	8.5	8.5	8.9	9.3	9.8	10.2	10.2	10.6	
	6H	8.0	8.4	8.5	8.8	9.2	9.8	10.1	10.2	10.6	
	8H	8.0	8.3	8.4	8.7	9.2	9.7	10.1	10.2	10.5	
	12H	7.9	8.2	8.4	8.7	9.1	9.7	9.9	10.1	10.4	
12H	4H	8.0	8.5	8.4	8.8	9.2	9.7	10.2	10.1	10.5	
	6H	8.0	8.3	8.4	8.7	9.2	9.7	10.0	10.2	10.5	
	8H	7.9	8.2	8.4	8.7	9.2	9.7	10.0	10.1	10.4	
Variations with the observer position at spacings(CIE Pub.117):											
S = 1.0H	+ 1.1 / - 1.4					+ 2.5 / - 1.9					
1.5H	+ 1.8 / - 0.9					+ 4.2 / - 1.5					
2.0H	+ 0.6 / - 0.7					+ 1.3 / - 0.9					

CIE Pub.117, 2655 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 3.4)
Area: 0.021 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:
Test Date:2023-06-08

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:7.580m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:220.64V I:0.2454A P:31.632W PF:0.5842 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2655.22x1 lm		
NAME: DL3350 4000K RA90 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 84*252	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	88	82	78	87	81	78	87	81	78	74
0.80	95	89	86	94	89	86	93	88	85	82
1.00	99	94	90	98	93	90	97	93	89	85
1.25	103	98	95	102	98	94	100	96	93	89
1.50	106	101	98	105	100	97	102	99	96	92
2.00	108	104	101	107	103	100	104	101	99	93
2.50	110	106	103	108	105	102	105	103	100	94
3.00	112	108	106	110	107	104	106	104	102	96
4.00	114	111	109	112	109	107	108	106	105	97
5.00	115	113	111	113	111	109	109	107	106	98
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3℃
Operators:
Test Date: 2023-06-08

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity: 65.0%
Test Distance: 7.580m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.64V I:0.2454A P:31.632W PF:0.5842 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2655.22x1 lm		
NAME: DL3350 4000K RA90 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 84*252	Shielding Angle:

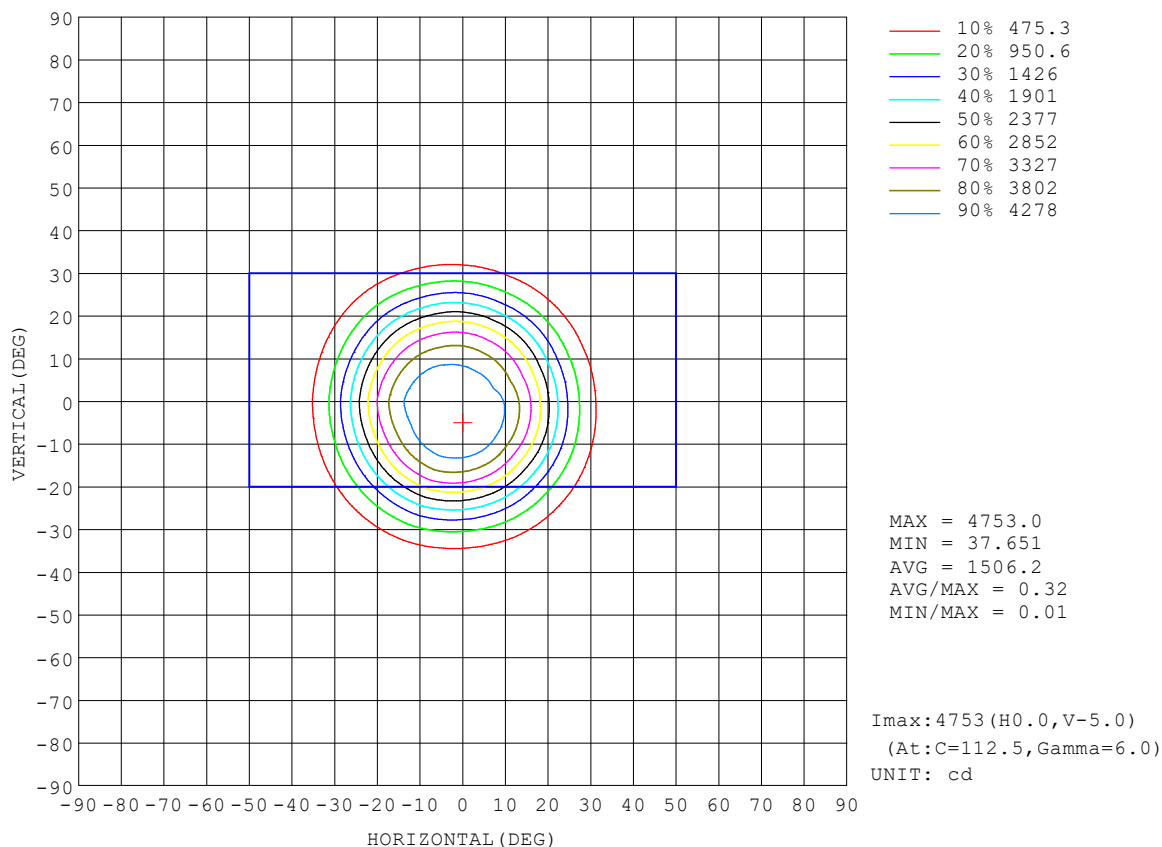


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:
Test Date:2023-06-08

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:7.580m [K=1.0000]
Remarks:

AAI Figure

Test:U:220.64V I:0.2454A P:31.632W PF:0.5842 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2655.22x1 lm		
NAME: DL3350 4000K RA90 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 84*252	Shielding Angle:

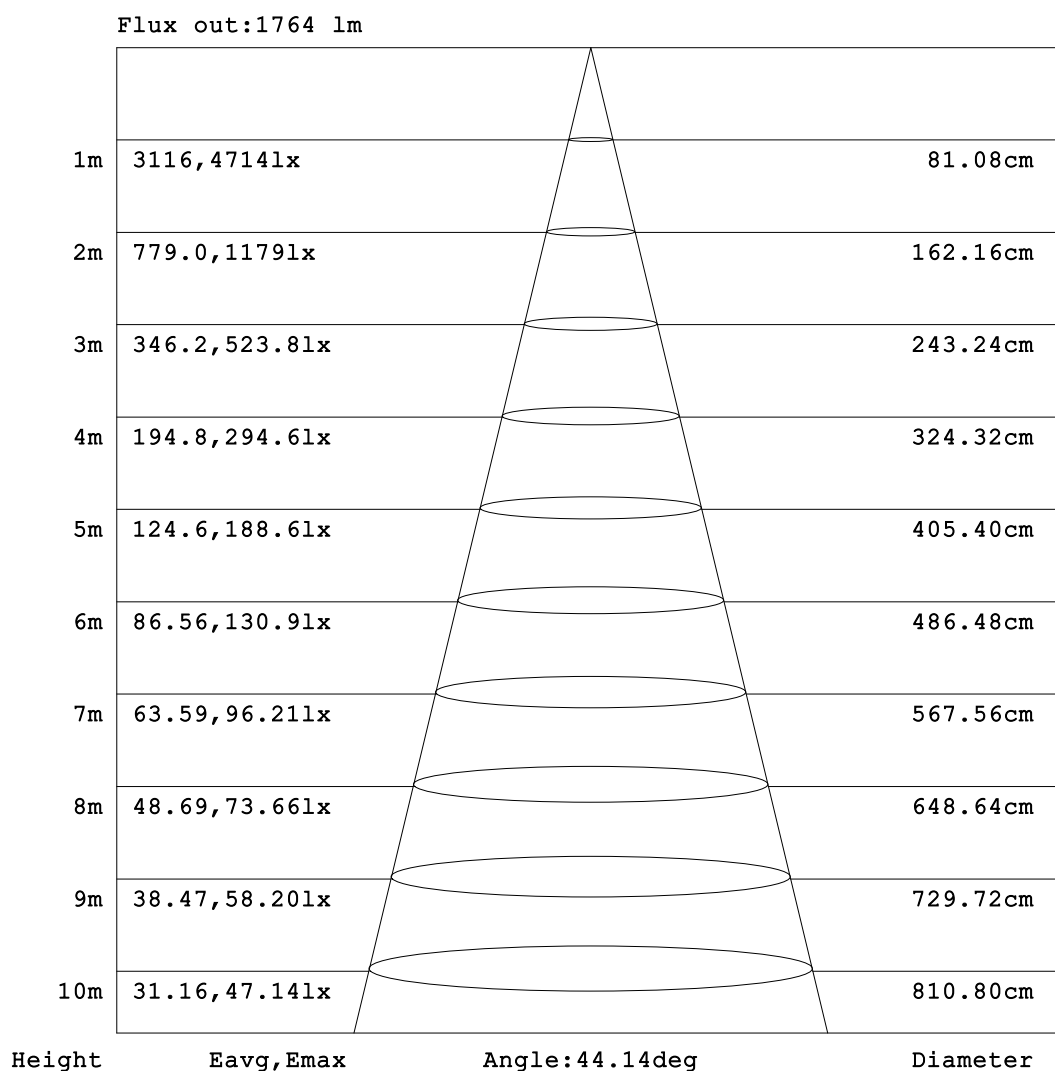


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:
Test Date:2023-06-08

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:7.580m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:220.64V I:0.2454A P:31.632W PF:0.5842 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2655.22x1 lm		
NAME: DL3350 4000K RA90 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 84*252	Shielding Angle:

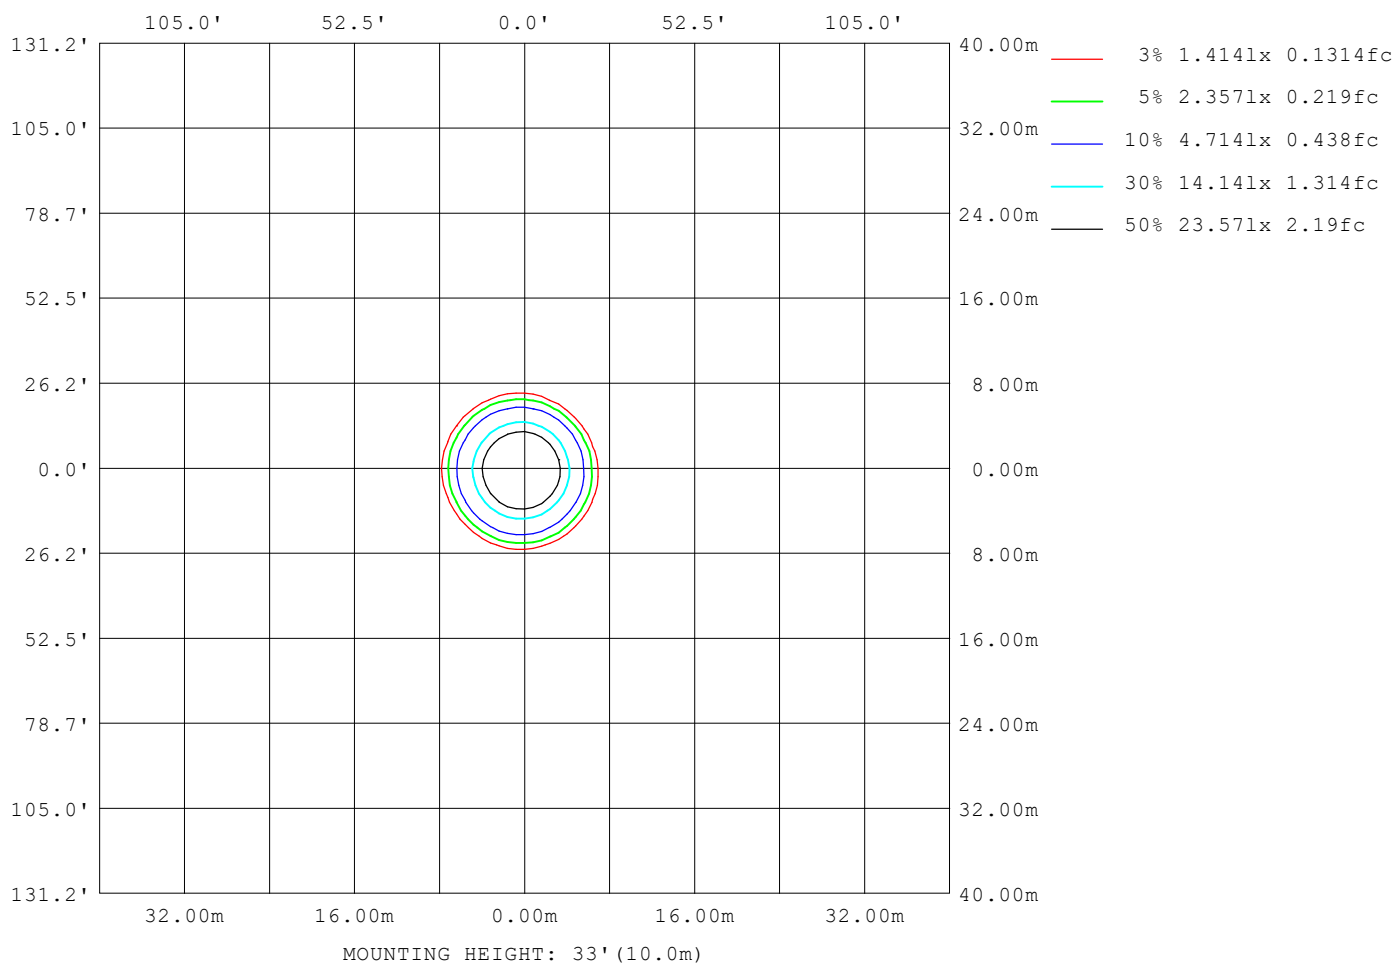

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators:
Test Date: 2023-06-08

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity: 65.0%
Test Distance: 7.580m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:220.64V I:0.2454A P:31.632W PF:0.5842 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2655.22x1 lm		
NAME: DL3350 4000K RA90 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 84*252	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	2821
L_0~180 (75) av	1326
L_0~180 (85) av	223
L_90~270 (65) av	2626
L_90~270 (75) av	1154
L_90~270 (85) av	132
L_45 (65) av	2769
L_45 (75) av	1319
L_45 (85) av	164

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:
Test Date:2023-06-08

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:7.580m [K=1.0000]
Remarks:

Planar Illuminance Curve

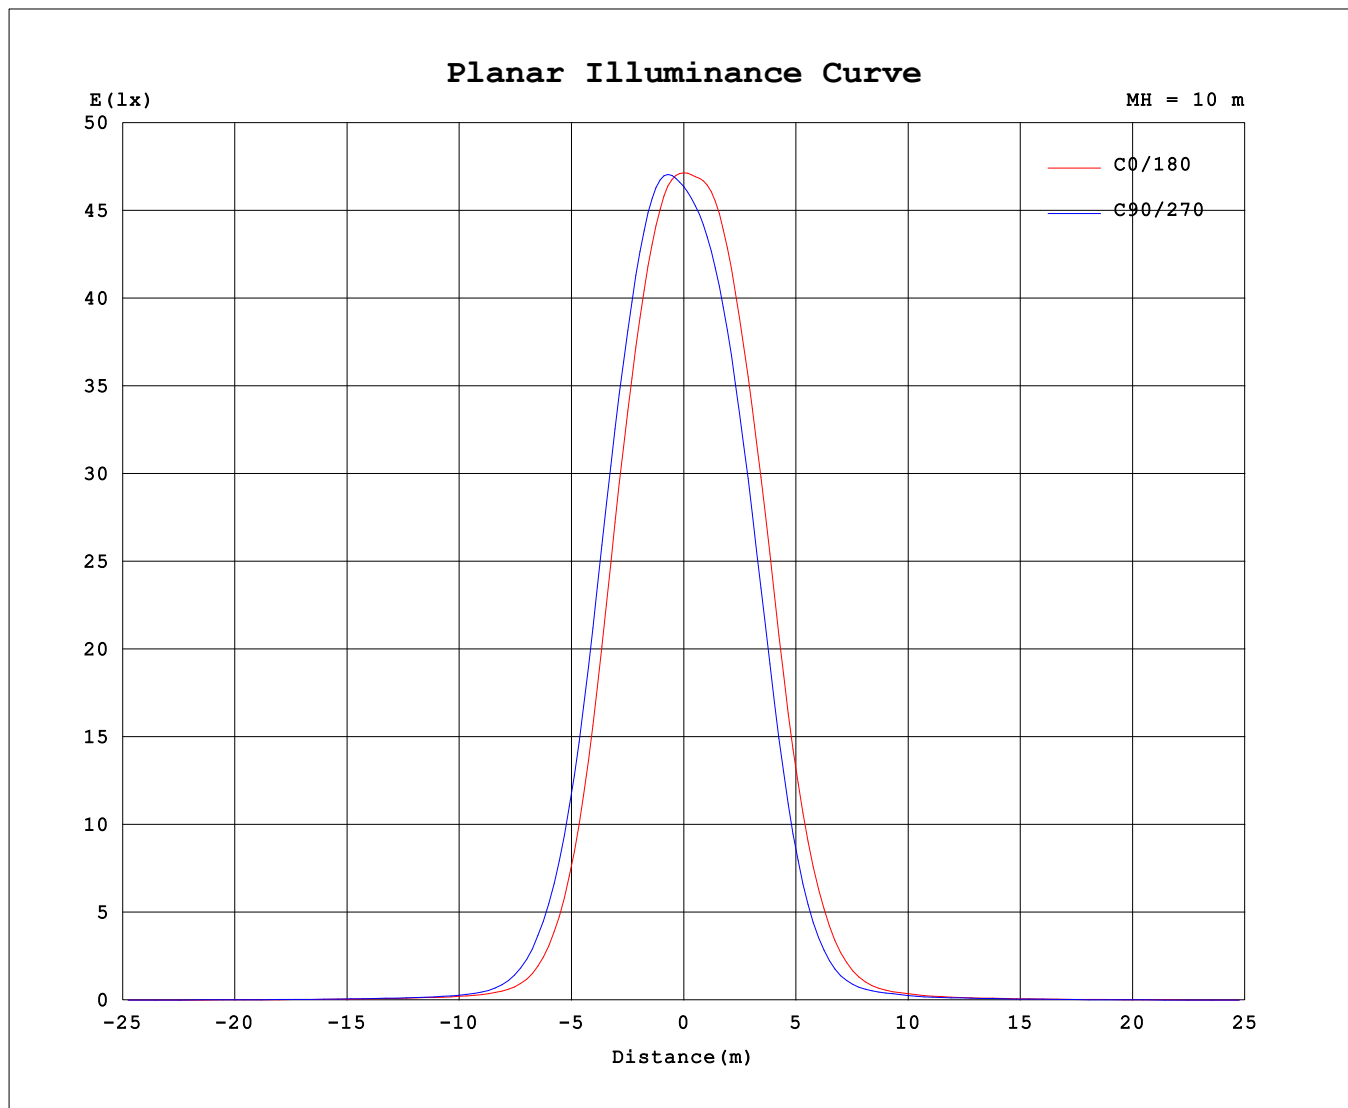

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3 °C
Operators:
Test Date: 2023-06-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity: 65.0%
Test Distance: 7.580m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.64V I:0.2454A P:31.632W PF:0.5842 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2655.22x1 lm		
NAME: DL3350 4000K RA90 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 84*252	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	4648	4648	4648	4648	4648	4648	4648	4648	4648	4648	4648	4648	4648	4648	4648	4648			
5	4570	4638	4692	4745	4765	4764	4738	4702	4657	4608	4559	4511	4481	4472	4487	4517			
10	4175	4289	4391	4525	4602	4649	4627	4591	4534	4425	4325	4213	4147	4098	4102	4115			
15	3454	3587	3717	3911	4050	4168	4163	4130	4075	3920	3776	3614	3518	3428	3406	3397			
20	2394	2550	2688	2934	3132	3328	3351	3331	3288	3098	2918	2708	2579	2442	2390	2342			
25	1327	1477	1590	1803	1982	2176	2210	2198	2167	1993	1835	1632	1507	1360	1317	1280			
30	594	684	770	916	1027	1160	1178	1177	1155	1029	926	783	686	595	555	548			
35	215	260	306	372	424	484	490	496	486	431	374	300	256	210	191	192			
40	97.4	110	122	141	156	175	169	175	183	171	153	130	118	104	94.6	91.6			
45	61.7	65.3	69.6	76.0	82.2	92.9	94.3	96.8	103	98.5	95.0	85.9	75.2	66.1	62.2	59.6			
50	49.2	50.6	52.4	55.2	57.5	60.3	62.7	64.9	66.6	64.4	60.8	57.2	54.6	52.4	50.4	48.3			
55	41.0	41.4	42.3	44.3	46.2	48.3	48.0	50.2	51.3	49.6	47.7	44.8	43.2	40.7	40.6	40.0			
60	31.5	32.2	32.5	34.3	35.7	37.5	37.3	38.2	39.9	37.9	36.7	34.7	33.7	32.3	31.4	31.0			
65	21.2	21.9	23.1	24.9	26.0	27.5	27.5	28.1	28.9	27.6	26.5	24.7	20.6	21.4	21.1	20.3			
70	11.3	11.8	12.5	13.9	14.9	16.0	15.9	17.1	16.9	16.4	14.3	11.9	8.70	10.2	10.4	10.7			
75	5.83	6.38	6.97	7.92	8.42	9.10	9.16	9.35	8.58	6.90	7.72	5.14	4.13	5.07	4.82	5.48			
80	1.48	1.64	2.34	2.69	3.04	4.04	4.17	4.36	4.08	3.12	1.87	1.45	1.07	1.04	0.93	1.33			
85	0.12	0.14	0.16	0.16	0.18	0.31	0.75	0.87	0.70	0.53	0.15	0.17	0.31	0.18	0.14	0.13			
90	0.12	0.16	0.16	0.16	0.18	0.16	0.17	0.16	0.13	0.12	0.14	0.17	0.20	0.17	0.16	0.13			
95	0.17	0.18	0.16	0.15	0.15	0.14	0.16	0.16	0.15	0.12	0.14	0.17	0.20	0.17	0.17	0.15			
100	0.24	0.25	0.21	0.21	0.19	0.20	0.17	0.21	0.19	0.16	0.19	0.17	0.22	0.20	0.22	0.19			
105	0.31	0.32	0.29	0.28	0.25	0.26	0.24	0.27	0.24	0.21	0.24	0.23	0.28	0.26	0.28	0.27			
110	0.40	0.41	0.37	0.36	0.33	0.34	0.31	0.34	0.31	0.28	0.33	0.34	0.39	0.40	0.42	0.40			
115	0.51	0.52	0.47	0.46	0.42	0.42	0.39	0.42	0.47	0.47	0.54	0.58	0.68	0.71	0.75	0.73			
120	0.75	0.73	0.66	0.62	0.56	0.55	0.52	0.55	0.82	0.86	0.97	1.09	1.23	1.34	1.38	1.39			
125	1.26	1.17	1.06	0.97	0.88	0.82	0.79	0.81	1.51	1.62	1.77	2.00	2.20	2.39	2.44	2.47			
130	2.15	1.99	1.83	1.65	1.52	1.41	1.36	1.37	2.64	2.81	3.02	3.33	3.59	3.86	3.93	3.97			
135	3.45	3.22	3.00	2.73	2.55	2.38	2.33	2.32	4.17	4.40	4.65	5.06	5.36	5.67	5.75	5.79			
140	5.09	4.80	4.53	4.19	3.96	3.74	3.69	3.68	6.03	6.30	6.59	7.05	7.37	7.70	7.79	7.82			
145	6.91	6.58	6.28	5.91	5.66	5.42	5.36	5.36	8.08	8.36	8.67	9.11	9.43	9.74	9.83	9.85			
150	8.69	8.38	8.09	7.74	7.48	7.23	7.18	7.19	10.1	10.4	10.7	11.1	11.4	11.6	11.7	11.7			
155	10.3	10.0	9.75	9.47	9.25	9.02	8.95	8.97	12.0	12.2	12.4	12.7	12.9	13.1	13.1	13.0			
160	11.5	11.4	11.2	11.0	10.8	10.6	10.5	10.5	13.4	13.5	13.6	13.8	14.0	13.9	13.9	13.9			
165	12.6	12.4	12.3	12.2	12.0	11.9	11.8	11.8	14.3	14.3	14.4	14.4	14.5	14.4	14.3	14.3			
170	13.5	13.5	13.3	13.3	13.1	13.0	12.9	13.0	14.8	14.8	14.8	14.7	14.7	14.7	14.6	14.5			
175	14.4	14.4	14.4	14.3	14.0	14.0	14.1	14.0	15.1	15.1	15.2	15.0	14.9	14.9	14.9	14.7			
180	15.0	15.1	15.1	15.0	14.8	14.8	14.8	14.7	15.1	15.1	15.2	14.9	14.9	14.8	14.9	14.7			

C Range: 0 - 360DEG

C Interval: 22.5DEG

Test Speed: HIGH

Temperature:25.3℃

Operators:

Test Date:2023-06-08

γ Range: 0 - 180DEG

γ Interval: 1.0DEG

Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456

Humidity:65.0%

Test Distance:7.580m [K=1.0000]

Remarks: