


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:220.44V I:0.0352A P:7.4459W PF:0.9584 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:347.794x1 lm		
NAME: DL3422 24D 4000K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 20	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 46.71 lm/W			
MODEL	DL3422 24D 4000K	I _{max} (cd)	1459	S/MH(C0/180)	0.40
NOMINAL POWER(W)	10	LOR(%)	100.0	S/MH(C90/270)	0.47
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	347.79	η UP,DN(C0-180)	0.3,54.3
NOMINAL FLUX(lm)	347.794	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.3,45.1
LAMPS INSIDE	1	η up (%)	0.6	CIBSE SHR NOM	0.00
TEST VOLTAGE(V)	220	η down (%)	99.4	CIBSE SHR MAX	0.30

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

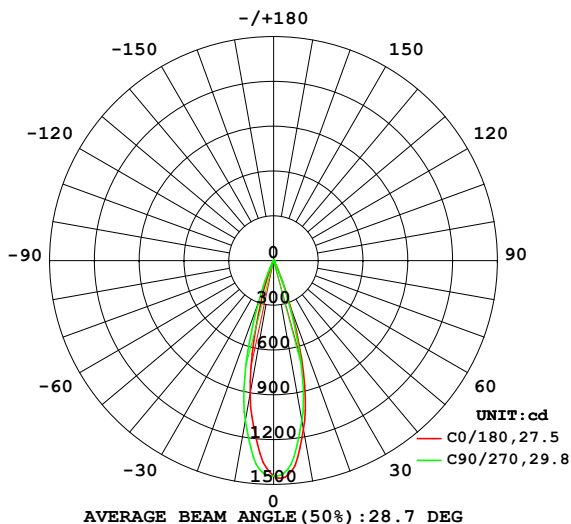

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

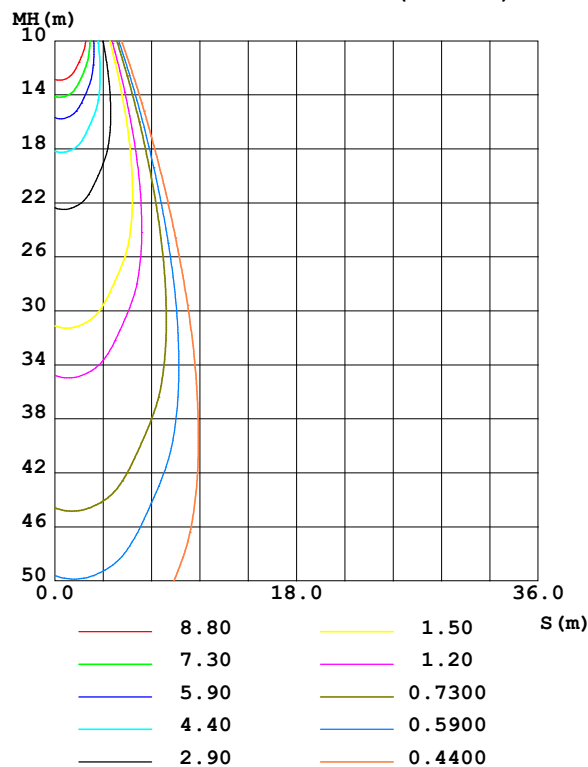

C Range: 0 - 180DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:VJC
Test Date:2022-04-19

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:7.580m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C90	C180	C270					γ	Φ zone	Φ total	%lum, lamp
10	1148	1091	912.1	1091					0- 10	118.9	118.9	34.2,34.2
20	326.3	293.8	149.3	293.8					10- 20	176.0	294.9	84.8,84.8
30	22.93	24.47	11.44	24.47					20- 30	42.76	337.6	97.1,97.1
40	2.358	2.311	1.907	2.311					30- 40	4.624	342.3	98.4,98.4
50	1.026	1.018	0.9758	1.018					40- 50	1.111	343.4	98.7,98.7
60	0.6171	0.6099	0.5599	0.6099					50- 60	0.7178	344.1	98.9,98.9
70	0.4293	0.4121	0.4477	0.4121					60- 70	0.4804	344.6	99.1,99.1
80	0.5684	0.5816	0.9487	0.5816					70- 80	0.4943	345.1	99.2,99.2
90	0.0023	0.0926	0	0.0926					80- 90	0.7970	345.9	99.4,99.4
100	0	0.0068	0	0.0068					90-100	0.0037	345.9	99.4,99.4
110	0.0045	0.0274	0.0137	0.0274					100-110	0.0098	345.9	99.5,99.5
120	0.0316	0.0501	0.0342	0.0501					110-120	0.0314	345.9	99.5,99.5
130	0.0474	0.0707	0.0730	0.0707					120-130	0.0450	346.0	99.5,99.5
140	0.2503	0.2760	0.4377	0.2760					130-140	0.1159	346.1	99.5,99.5
150	0.9027	0.9458	1.219	0.9458					140-150	0.3844	346.5	99.6,99.6
160	1.685	1.747	1.886	1.747					150-160	0.6429	347.1	99.8,99.8
170	1.821	1.831	1.727	1.831					160-170	0.5256	347.6	100,100
180	1.649	1.624	1.615	1.624					170-180	0.1626	347.8	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 342.92 lm

%lum = 98.6%

%lamp = 98.6%

Conical surface Flux(130deg): 344.36 lm

%lum = 99.0%


%lamp = 99.0%

C Range: 0 - 180DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:VJC
 Test Date:2022-04-19

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:7.580m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:220.44V I:0.0352A P:7.4459W PF:0.9584 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:347.794x1 lm		
NAME: DL3422 24D 4000K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 20	Shielding Angle:

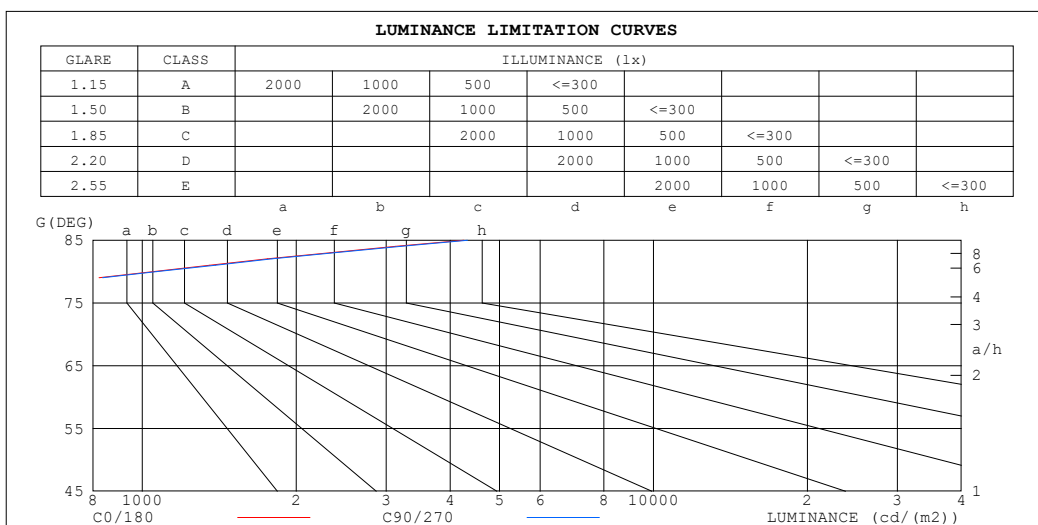

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	4257	4325
80	1050	1065
75	523	507
70	402	383
65	365	348
60	396	388
55	462	458
50	512	504
45	682	646


C Range: 0 - 180DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature: 25.3 °C
Operators: VJC
Test Date: 2022-04-19

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity: 65.0%
Test Distance: 7.580m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.44V I:0.0352A P:7.4459W PF:0.9584 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:347.794x1 lm		
NAME: DL3422 24D 4000K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 20	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.99
1.0	1.13	1.11	1.09	1.11	1.09	1.07	1.06	1.05	1.04	1.03	1.02	1.01	.99	.99	.98	.96
2.0	1.08	1.05	1.02	1.06	1.03	1.01	1.03	1.01	.99	.00	.98	.97	.97	.96	.95	.93
3.0	1.03	.00	.97	1.02	.99	.96	.99	.97	.94	.97	.95	.93	.95	.93	.92	.90
4.0	.99	.95	.92	.98	.95	.92	.96	.93	.91	.94	.92	.90	.93	.90	.89	.88
5.0	.96	.92	.89	.95	.91	.88	.93	.90	.88	.92	.89	.87	.90	.88	.86	.85
6.0	.93	.89	.86	.92	.88	.85	.91	.87	.85	.89	.86	.84	.88	.86	.84	.83
7.0	.90	.86	.83	.89	.85	.83	.88	.85	.82	.87	.84	.82	.86	.83	.81	.80
8.0	.87	.83	.80	.87	.83	.80	.86	.82	.80	.85	.82	.80	.84	.81	.79	.78
9.0	.85	.81	.78	.84	.81	.78	.83	.80	.78	.83	.80	.77	.82	.79	.77	.76
10.0	.82	.79	.76	.82	.78	.76	.81	.78	.76	.81	.78	.75	.80	.77	.75	.74

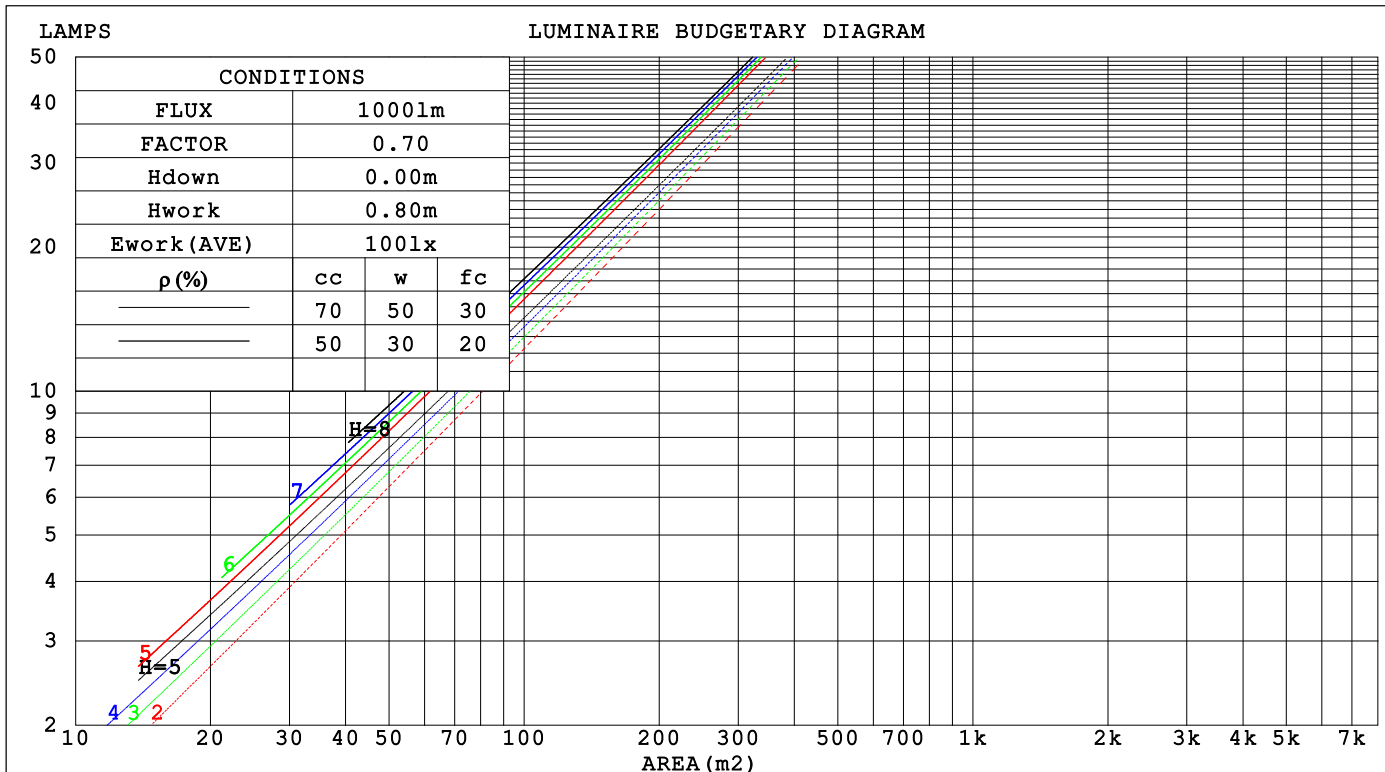

C Range: 0 - 180DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature: 25.3℃
 Operators: VJC
 Test Date: 2022-04-19

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.456
 Humidity: 65.0%
 Test Distance: 7.580m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:220.44V I:0.0352A P:7.4459W PF:0.9584 Freq:49.99Hz			UTHDi:0.00% ITHDi:0.00% KDisp:0			Lamp Flux:347.794x1 lm		
NAME: DL3422 24D 4000K			TYPE:			WEIGHT:		
SPEC.:			DIM.:			SERIAL No.:		
MFR.: VJC Lighting			SUR.: 20			Shielding Angle:		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.137	.078	.025	.131	.075	.024	.118	.068	.022	.106	.061	.020	.096	.055	.018		
2.0	.126	.069	.021	.120	.066	.020	.110	.061	.019	.100	.056	.018	.091	.052	.016		
3.0	.117	.062	.019	.112	.060	.018	.103	.056	.017	.095	.052	.016	.088	.048	.015		
4.0	.109	.057	.017	.105	.055	.016	.098	.052	.015	.091	.049	.015	.084	.046	.014		
5.0	.102	.052	.015	.099	.051	.015	.093	.048	.014	.087	.046	.014	.081	.043	.013		
6.0	.097	.048	.014	.094	.047	.014	.088	.045	.013	.083	.043	.013	.078	.041	.012		
7.0	.092	.045	.013	.089	.044	.013	.084	.043	.012	.080	.041	.012	.076	.039	.012		
8.0	.087	.043	.012	.085	.042	.012	.081	.040	.012	.077	.039	.011	.073	.038	.011		
9.0	.083	.040	.011	.082	.040	.011	.078	.038	.011	.074	.037	.011	.071	.036	.010		
10.0	.080	.038	.011	.078	.038	.011	.075	.037	.010	.072	.036	.010	.069	.035	.010		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.195	.195	.195	.166	.166	.166	.114	.114	.114	.065	.065	.065	.021	.021	.021	
1.0	.173	.162	.152	.148	.139	.131	.101	.096	.091	.058	.055	.053	.019	.018	.017	
2.0	.154	.137	.122	.132	.118	.106	.091	.082	.074	.052	.047	.043	.017	.015	.014	
3.0	.139	.118	.100	.119	.101	.087	.082	.070	.061	.047	.041	.036	.015	.013	.012	
4.0	.127	.102	.084	.109	.088	.073	.075	.062	.051	.043	.036	.030	.014	.012	.010	
5.0	.116	.090	.071	.100	.078	.061	.069	.054	.043	.040	.032	.026	.013	.010	.008	
6.0	.107	.080	.060	.092	.069	.053	.063	.048	.037	.037	.028	.022	.012	.009	.007	
7.0	.099	.072	.052	.085	.062	.045	.059	.044	.032	.034	.026	.019	.011	.008	.006	
8.0	.093	.065	.046	.080	.056	.040	.055	.039	.028	.032	.023	.017	.010	.008	.006	
9.0	.087	.059	.040	.075	.051	.035	.052	.036	.025	.030	.021	.015	.010	.007	.005	
10.0	.082	.054	.036	.071	.047	.031	.049	.033	.022	.029	.020	.013	.009	.006	.004	

C Range: 0 - 180DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:VJC
Test Date:2022-04-19

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:7.580m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:220.44V I:0.0352A P:7.4459W PF:0.9584 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:347.794x1 lm										
NAME: DL3422 24D 4000K					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: VJC Lighting					SUR.: 20			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	2.6	3.3	2.8	3.4	3.6	2.8	3.4	3.0	3.6	3.8
3H	3.1	3.7	3.4	3.9	4.1	3.2	3.8	3.5	4.0	4.2
4H	3.6	4.2	3.9	4.4	4.6	3.7	4.2	3.9	4.4	4.7
6H	4.7	5.3	5.0	5.5	5.8	4.8	5.3	5.1	5.6	5.8
8H	6.4	6.9	6.7	7.1	7.4	6.4	7.0	6.7	7.2	7.5
12H	9.5	10.0	9.9	10.3	10.6	9.3	9.8	9.7	10.1	10.4
4H 2H	2.7	3.2	2.9	3.5	3.7	2.8	3.4	3.1	3.6	3.8
3H	3.4	3.9	3.7	4.1	4.4	3.5	4.0	3.8	4.2	4.5
4H	4.1	4.6	4.5	4.9	5.2	4.1	4.6	4.5	4.9	5.2
6H	5.7	6.1	6.1	6.5	6.8	5.8	6.2	6.2	6.5	6.9
8H	7.8	8.2	8.2	8.5	8.9	7.9	8.2	8.2	8.6	9.0
12H	11.4	11.8	11.9	12.2	12.6	11.2	11.5	11.6	11.9	12.3
8H 4H	4.5	4.8	4.9	5.2	5.6	4.5	4.9	4.9	5.2	5.6
6H	6.7	7.0	7.2	7.4	7.9	6.8	7.1	7.2	7.5	7.9
8H	9.2	9.5	9.7	9.9	10.4	9.3	9.6	9.7	10.0	10.4
12H	13.3	13.5	13.7	14.0	14.4	12.9	13.2	13.4	13.6	14.1
12H 4H	4.7	5.1	5.1	5.4	5.8	4.7	5.1	5.1	5.5	5.9
6H	7.3	7.6	7.8	8.0	8.5	7.3	7.6	7.8	8.0	8.5
8H	10.0	10.2	10.5	10.7	11.1	10.0	10.3	10.5	10.7	11.2
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.3 / - 0.3					+ 0.3 / - 0.3				
1.5H	+ 0.3 / - 0.4					+ 0.3 / - 0.4				
2.0H	+ 0.4 / - 0.5					+ 0.4 / - 0.5				

CIE Pub.117, 347.8 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -3.7)
Area: 0.00314 m2

C Range: 0 - 180DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:VJC
Test Date:2022-04-19

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:7.580m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:220.44V I:0.0352A P:7.4459W PF:0.9584 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:347.794x1 lm		
NAME: DL3422 24D 4000K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 20	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	91	85	81	90	85	81	89	84	81	78
0.80	98	92	89	97	92	89	96	91	88	85
1.00	101	96	93	100	96	93	99	95	92	88
1.25	105	100	97	104	100	97	102	98	96	92
1.50	107	103	100	106	102	99	104	101	98	94
2.00	109	106	103	108	105	102	105	103	100	95
2.50	111	107	105	109	106	104	106	104	102	96
3.00	112	109	107	111	108	106	107	105	103	97
4.00	114	112	110	112	110	108	108	107	105	98
5.00	115	113	112	113	112	110	109	108	107	99
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 180DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature: 25.3℃
Operators: VJC
Test Date: 2022-04-19

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity: 65.0%
Test Distance: 7.580m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.44V I:0.0352A P:7.4459W PF:0.9584 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:347.794x1 lm		
NAME: DL3422 24D 4000K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 20	Shielding Angle:

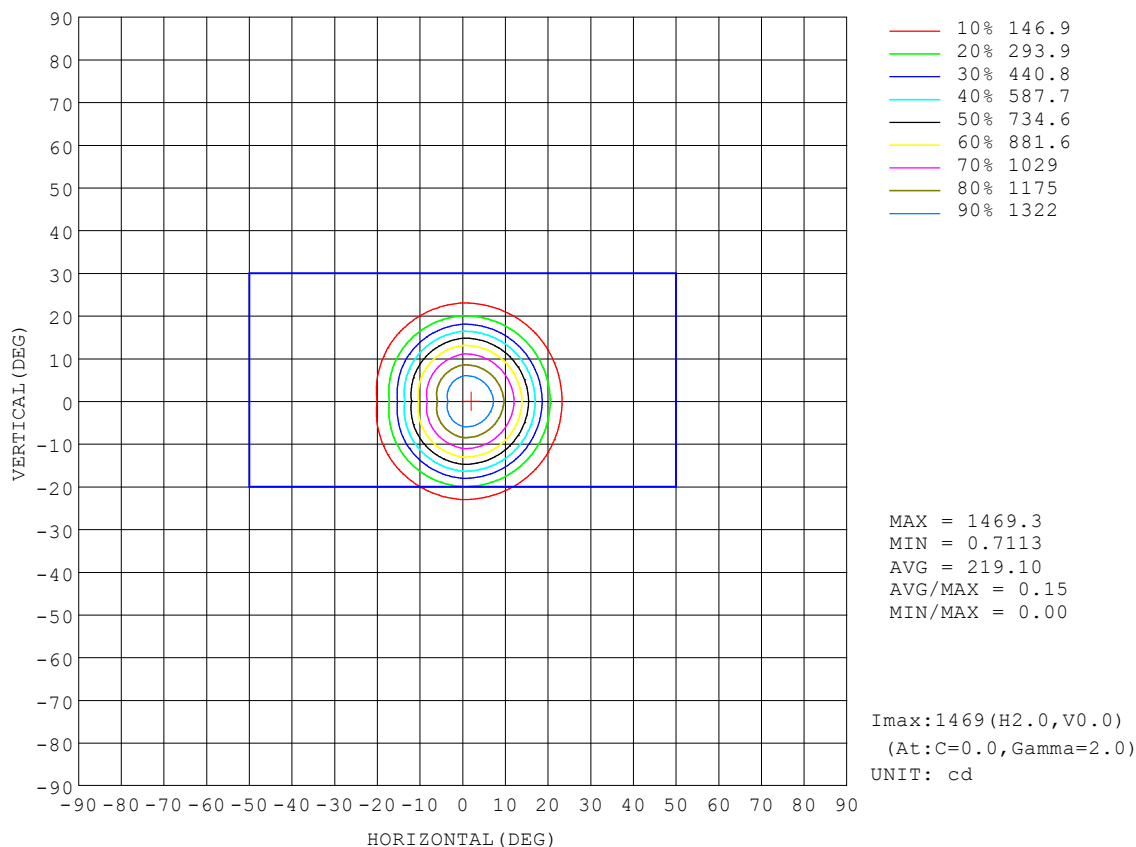


C Range: 0 - 180DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: VJC
Test Date: 2022-04-19

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity: 65.0%
Test Distance: 7.580m [K=1.0000]
Remarks:

AAI Figure

Test:U:220.44V I:0.0352A P:7.4459W PF:0.9584 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:347.794x1 lm		
NAME: DL3422 24D 4000K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 20	Shielding Angle:

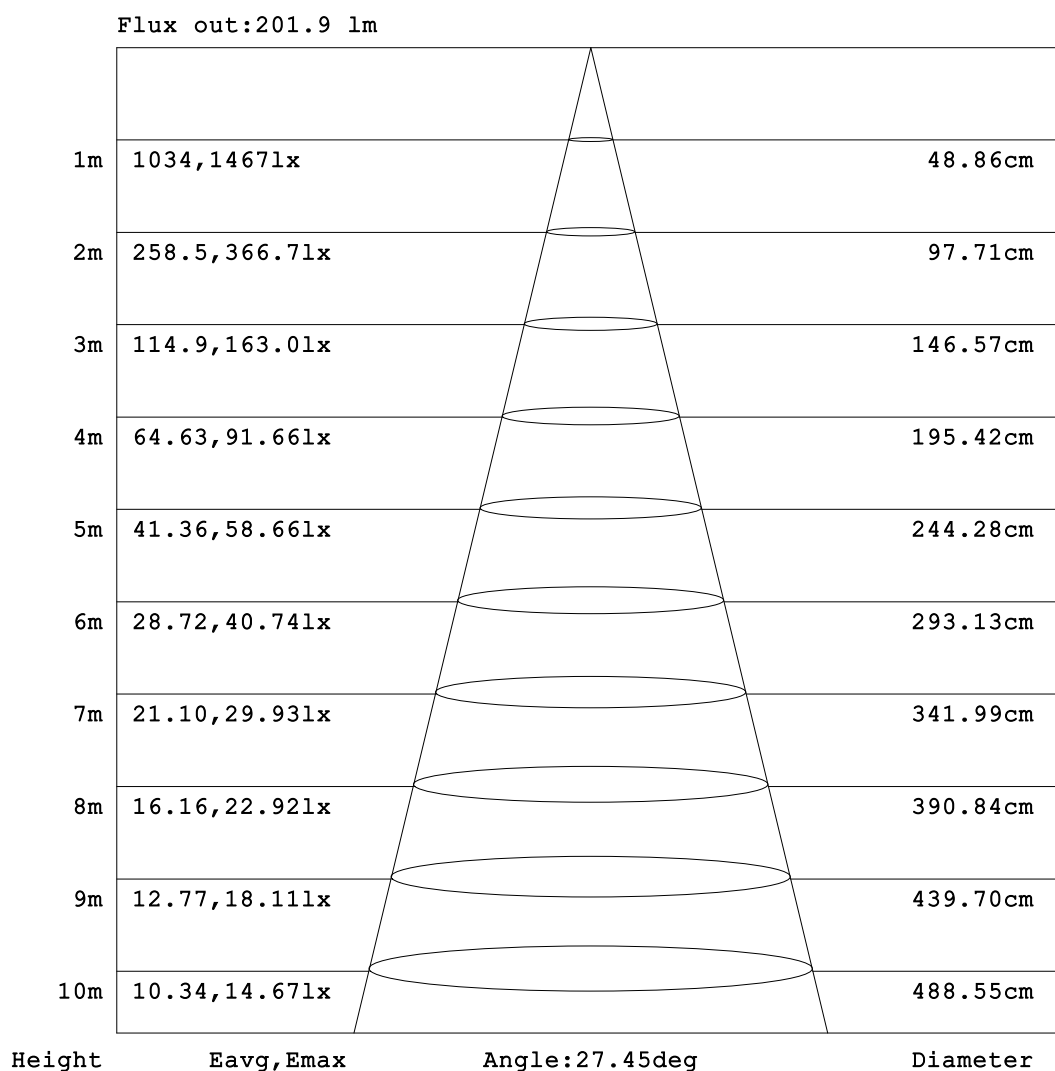


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 180DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature: 25.3℃
 Operators: VJC
 Test Date: 2022-04-19

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.456
 Humidity: 65.0%
 Test Distance: 7.580m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:220.44V I:0.0352A P:7.4459W PF:0.9584 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:347.794x1 lm		
NAME: DL3422 24D 4000K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 20	Shielding Angle:

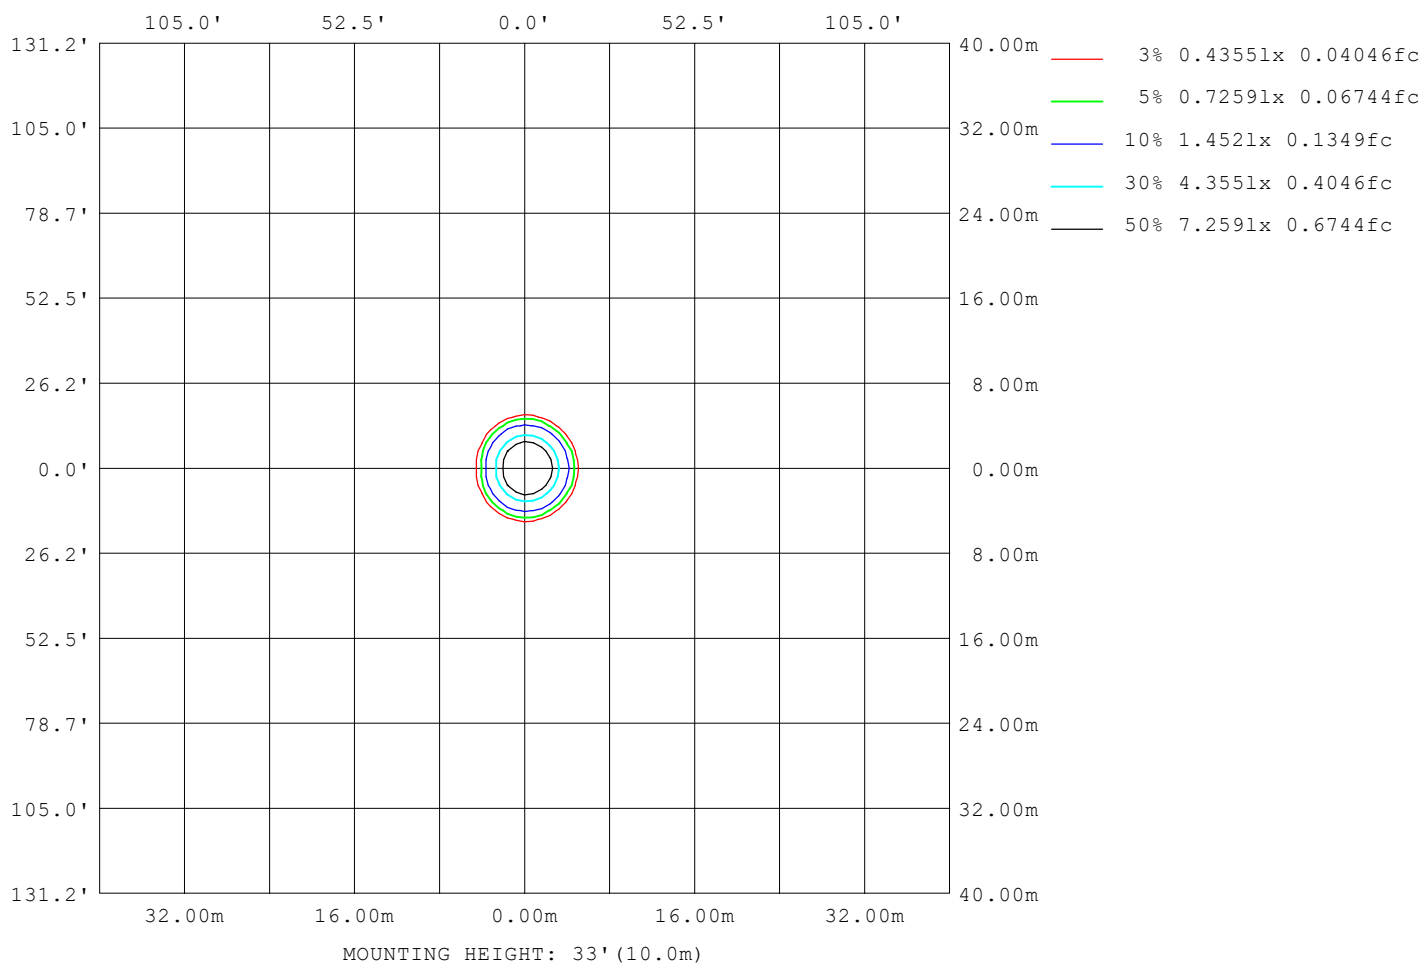

C Range: 0 - 180DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:VJC
Test Date:2022-04-19

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:7.580m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:220.44V I:0.0352A P:7.4459W PF:0.9584 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:347.794x1 lm		
NAME: DL3422 24D 4000K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 20	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	360
L_0~180 (75) av	545
L_0~180 (85) av	2500
L_90~270 (65) av	348
L_90~270 (75) av	507
L_90~270 (85) av	4330
L_45 (65) av	352
L_45 (75) av	523
L_45 (85) av	3535

Standard: GB/T 29293-2012

C Range: 0 - 180DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:VJC
Test Date:2022-04-19

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:7.580m [K=1.0000]
Remarks:

Planar Illuminance Curve

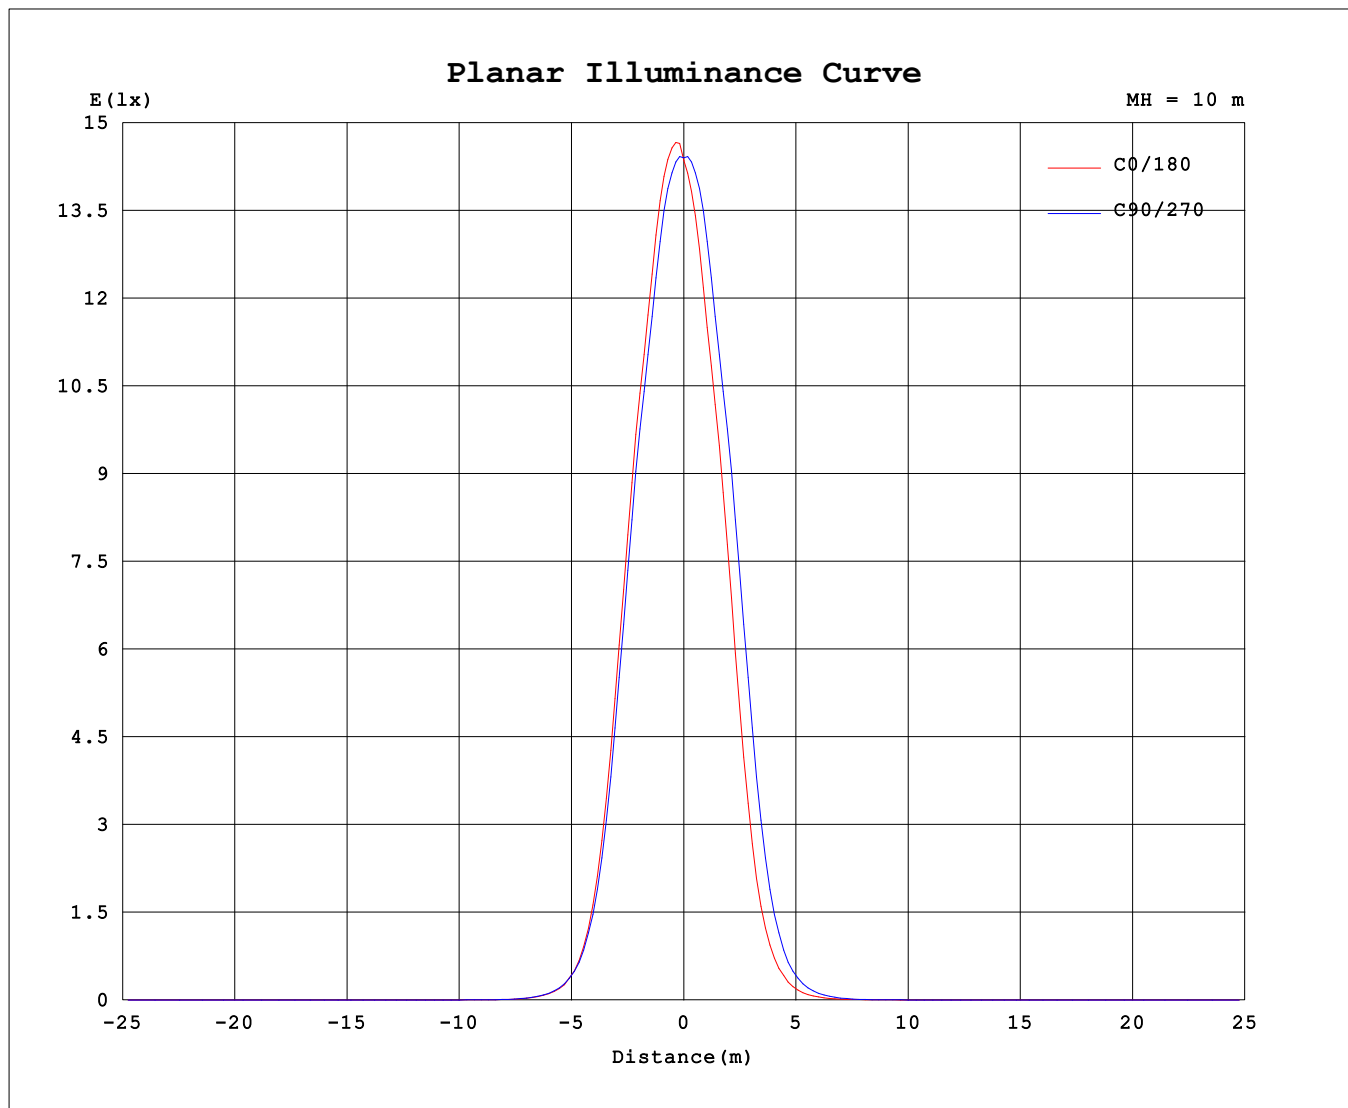

C Range: 0 - 180DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature: 25.3 °C
Operators: VJC
Test Date: 2022-04-19

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity: 65.0%
Test Distance: 7.580m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.44V I:0.0352A P:7.4459W PF:0.9584 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:347.794x1 lm		
NAME: DL3422 24D 4000K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 20	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	90	180	270														
0	1442	1442	1442	1442														
5	1415	1367	1238	1367														
10	1148	1091	912	1091														
15	774	714	463	714														
20	326	294	149	294														
25	91.0	87.5	41.5	87.5														
30	22.9	24.5	11.4	24.5														
35	6.37	6.84	3.54	6.84														
40	2.36	2.31	1.91	2.31														
45	1.50	1.44	1.20	1.44														
50	1.03	1.02	0.98	1.02														
55	0.83	0.83	0.75	0.83														
60	0.62	0.61	0.56	0.61														
65	0.48	0.46	0.47	0.46														
70	0.43	0.41	0.45	0.41														
75	0.42	0.41	0.46	0.41														
80	0.57	0.58	0.95	0.58														
85	1.16	1.18	0.21	1.18														
90	0.00	0.09	0.00	0.09														
95	0.00	0.00	0.00	0.00														
100	0.00	0.01	0.00	0.01														
105	0.00	0.02	0.00	0.02														
110	0.00	0.03	0.01	0.03														
115	0.02	0.04	0.03	0.04														
120	0.03	0.05	0.03	0.05														
125	0.04	0.06	0.04	0.06														
130	0.05	0.07	0.07	0.07														
135	0.10	0.13	0.19	0.13														
140	0.25	0.28	0.44	0.28														
145	0.53	0.56	0.79	0.56														
150	0.90	0.95	1.22	0.95														
155	1.32	1.39	1.62	1.39														
160	1.68	1.75	1.89	1.75														
165	1.85	1.91	1.91	1.91														
170	1.82	1.83	1.73	1.83														
175	1.69	1.66	1.59	1.66														
180	1.65	1.62	1.61	1.62														

C Range: 0 - 180DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:VJC
Test Date:2022-04-19

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:7.580m [K=1.0000]
Remarks: