


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:220.70V I:0.0233A P:4.6647W PF:0.9076 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:277.75x1 lm		
NAME: DL3526 3000K RA90 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 50	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 59.54 lm/W			
MODEL	DL3526 3000K RA90 36D	I _{max} (cd)	1196	S/MH(C0/180)	0.41
NOMINAL POWER(W)	5	LOR(%)	100.0	S/MH(C90/270)	0.33
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	277.75	η UP,DN(C0-180)	0.4,63.2
NOMINAL FLUX(lm)	277.75	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.5,35.9
LAMPS INSIDE	1	η up (%)	0.9	CIBSE SHR NOM	0.00
TEST VOLTAGE(V)	220	η down (%)	99.1	CIBSE SHR MAX	0.30

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

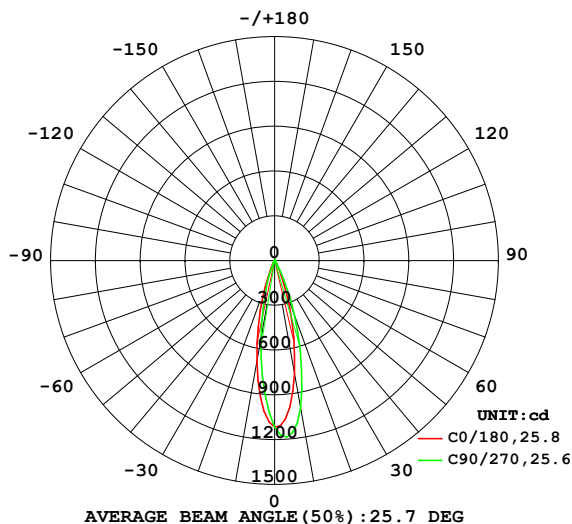

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

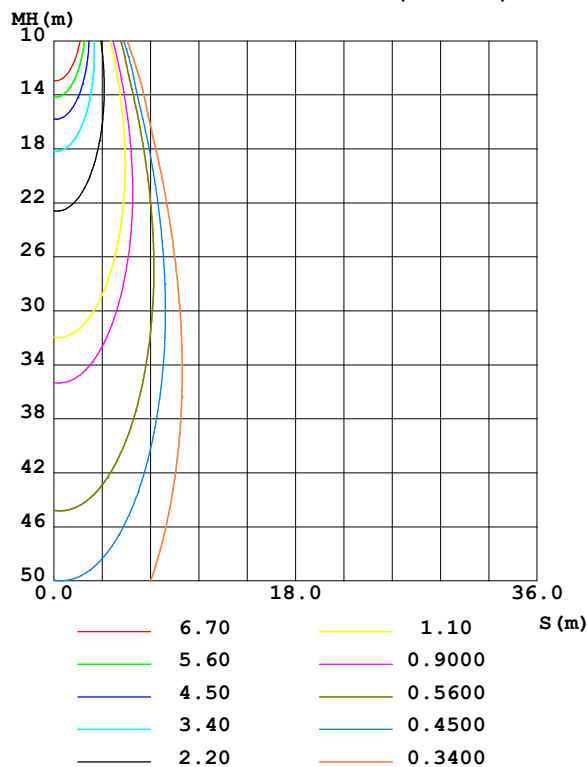

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3 °C
Operators: 001
Test Date: 2024-10-23

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity: 65.0%
Test Distance: 8.370m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	767.5	957.6	999.8	859.2	690.0	560.7	535.3	614.8	0- 10	87.76	87.76	31.6,31.6
20	234.4	363.1	391.7	291.1	191.9	117.8	106.8	145.5	10- 20	125.9	213.7	76.9,76.9
30	41.49	66.05	68.34	46.22	25.25	16.06	15.14	24.03	20- 30	48.56	262.2	94.4,94.4
40	4.886	8.610	8.503	4.858	2.588	2.037	2.018	2.600	30- 40	10.22	272.4	98.1,98.1
50	1.458	1.668	1.556	1.330	1.173	0.9914	1.046	1.142	40- 50	1.738	274.2	98.7,98.7
60	0.5689	0.9177	0.9441	0.7257	0.4621	0.1542	0.3061	0.2225	50- 60	0.8315	275.0	99,99
70	0.0524	0.0804	0.1907	0.0365	0	0	0.0083	0.0223	60- 70	0.2130	275.2	99.1,99.1
80	0.0441	0.0414	0.0304	0.0139	0	0	0.0055	0.0195	70- 80	0.0239	275.2	99.1,99.1
90	0	0.0001	0.0002	0	0	0	0	0	80- 90	0.0107	275.3	99.1,99.1
100	0	0	0	0	0	0	0	0	90-100	0.0000	275.3	99.1,99.1
110	0	0	0	0	0	0	0	0	100-110	0	275.3	99.1,99.1
120	0	0	0	0	0.0139	0.0499	0.0582	0.0308	110-120	0.0024	275.3	99.1,99.1
130	0.1649	0.0992	0.0990	0.1557	0.2429	0.3653	0.3981	0.3239	120-130	0.0861	275.3	99.1,99.1
140	0.6905	0.5518	0.5513	0.6903	0.7940	0.9871	1.052	0.9485	130-140	0.3725	275.7	99.3,99.3
150	1.352	1.226	1.239	1.379	1.455	1.608	1.659	1.589	140-150	0.7000	276.4	99.5,99.5
160	1.666	1.652	1.692	1.745	1.732	1.729	1.736	1.711	150-160	0.7509	277.2	99.8,99.8
170	1.435	1.545	1.574	1.564	1.454	1.353	1.272	1.304	160-170	0.4620	277.6	100,100
180	1.201	1.232	1.173	1.193	1.206	1.213	1.170	1.171	170-180	0.1254	277.7	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 273.68 lm

%lum = 98.5%

%lamp = 98.5%

Conical surface Flux(130deg): 275.18 lm

%lum = 99.1%


%lamp = 99.1%

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:001
Test Date:2024-10-23

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:8.370m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:220.70V I:0.0233A P:4.6647W PF:0.9076 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:277.75x1 lm		
NAME: DL3526 3000K RA90 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 50	Shielding Angle:

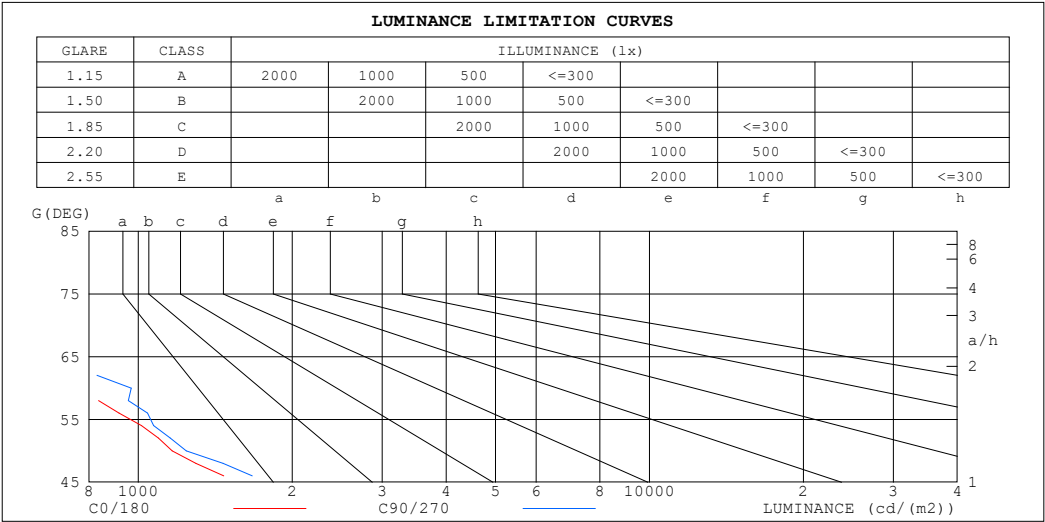

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	260	162
80	130	90
75	87	77
70	79	286
65	245	581
60	584	968
55	1039	1098
50	1166	1241
45	1738	2466


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:001
Test Date:2024-10-23

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:8.370m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.70V I:0.0233A P:4.6647W PF:0.9076 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:277.75x1 lm		
NAME: DL3526 3000K RA90 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 50	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
p _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
p _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.01	1.01	1.01	.99
1.0	1.13	1.11	1.09	1.10	1.09	1.07	1.06	1.05	1.04	1.02	1.01	1.00	.99	.98	.97	.96
2.0	1.07	1.04	1.01	1.05	1.03	1.00	1.02	.00	.98	.99	.97	.96	.96	.95	.94	.92
3.0	1.02	.99	.96	1.01	.98	.95	.98	.96	.93	.96	.94	.92	.94	.92	.90	.89
4.0	.98	.94	.91	.97	.93	.90	.95	.92	.89	.93	.90	.88	.91	.89	.87	.86
5.0	.94	.90	.87	.93	.90	.87	.92	.88	.86	.90	.87	.85	.89	.86	.84	.83
6.0	.91	.87	.84	.90	.86	.83	.89	.85	.83	.87	.84	.82	.86	.84	.82	.80
7.0	.88	.84	.81	.87	.83	.80	.86	.82	.80	.85	.82	.79	.84	.81	.79	.78
8.0	.85	.81	.78	.84	.80	.78	.83	.80	.77	.82	.79	.77	.82	.79	.77	.76
9.0	.82	.78	.75	.82	.78	.75	.81	.77	.75	.80	.77	.75	.79	.76	.74	.73
10.0	.80	.76	.73	.79	.76	.73	.79	.75	.73	.78	.75	.72	.77	.74	.72	.71

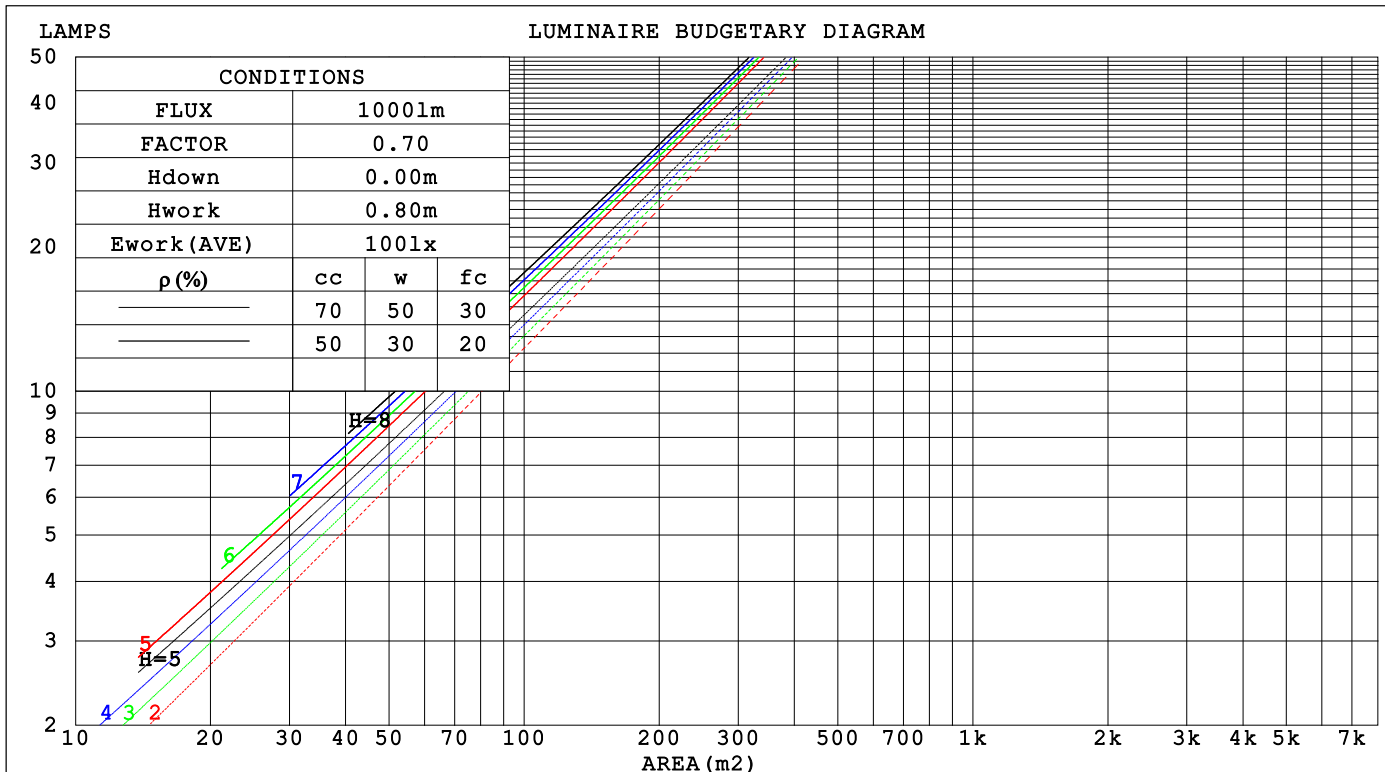

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:001
Test Date:2024-10-23

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:8.370m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:220.70V I:0.0233A P:4.6647W PF:0.9076 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:277.75x1 lm		
NAME: DL3526 3000K RA90 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 50	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.140	.080	.025	.133	.076	.024	.120	.069	.022	.108	.062	.020	.097	.056	.018		
2.0	.130	.071	.022	.124	.068	.021	.114	.063	.020	.104	.058	.018	.095	.053	.017		
3.0	.121	.065	.019	.117	.062	.019	.108	.058	.018	.099	.054	.017	.092	.051	.016		
4.0	.114	.059	.017	.110	.058	.017	.102	.054	.016	.095	.051	.015	.089	.048	.015		
5.0	.108	.055	.016	.104	.053	.016	.098	.051	.015	.091	.048	.014	.086	.046	.014		
6.0	.102	.051	.015	.099	.050	.014	.093	.048	.014	.088	.046	.013	.083	.044	.013		
7.0	.097	.048	.014	.094	.047	.013	.089	.045	.013	.085	.043	.013	.080	.042	.012		
8.0	.093	.045	.013	.090	.044	.013	.086	.043	.012	.082	.041	.012	.078	.040	.012		
9.0	.089	.043	.012	.086	.042	.012	.083	.041	.012	.079	.040	.011	.075	.038	.011		
10.0	.085	.041	.011	.083	.040	.011	.080	.039	.011	.076	.038	.011	.073	.037	.011		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)										
0.0	.197	.197	.197	.169	.169	.169	.115	.115	.115	.066	.066	.066	.021	.021	.021		
1.0	.175	.165	.155	.150	.141	.133	.103	.097	.092	.059	.056	.054	.019	.018	.017		
2.0	.158	.140	.125	.135	.120	.108	.093	.083	.075	.053	.048	.044	.017	.016	.014		
3.0	.143	.120	.102	.122	.104	.089	.084	.072	.062	.049	.042	.037	.016	.014	.012		
4.0	.131	.105	.085	.112	.091	.074	.077	.063	.052	.045	.037	.031	.014	.012	.010		
5.0	.120	.093	.072	.103	.080	.063	.071	.056	.045	.041	.033	.026	.013	.011	.009		
6.0	.111	.083	.062	.096	.072	.054	.066	.050	.038	.038	.030	.023	.012	.010	.008		
7.0	.104	.075	.054	.089	.065	.047	.062	.045	.033	.036	.027	.020	.012	.009	.007		
8.0	.098	.068	.048	.084	.059	.042	.058	.041	.029	.034	.024	.018	.011	.008	.006		
9.0	.092	.062	.042	.079	.054	.037	.055	.038	.026	.032	.022	.016	.010	.007	.005		
10.0	.087	.058	.038	.075	.050	.033	.052	.035	.024	.030	.021	.014	.010	.007	.005		

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:001
Test Date:2024-10-23

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:8.370m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:220.70V I:0.0233A P:4.6647W PF:0.9076 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:277.75x1 lm											
NAME: DL3526 3000K RA90 36D						TYPE:		WEIGHT:			
SPEC.:						DIM.:		SERIAL No.:			
MFR.: VJC Lighting						SUR.: 50		Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H		12.2	12.8	12.4	13.0	13.2	14.2	14.9	14.5	15.1	15.2
3H		12.0	12.6	12.3	12.8	13.0	14.1	14.7	14.4	14.9	15.1
4H		11.9	12.5	12.2	12.7	13.0	14.0	14.6	14.3	14.8	15.1
6H		11.8	12.4	12.1	12.6	12.9	13.9	14.5	14.2	14.7	15.0
8H		11.8	12.3	12.1	12.6	12.9	13.9	14.4	14.2	14.7	15.0
12H		11.8	12.3	12.1	12.5	12.8	13.8	14.4	14.2	14.6	14.9
4H 2H		12.0	12.6	12.2	12.8	13.0	14.0	14.6	14.3	14.8	15.1
3H		11.8	12.3	12.1	12.6	12.9	13.9	14.4	14.2	14.7	14.9
4H		11.7	12.2	12.0	12.5	12.8	13.8	14.2	14.1	14.6	14.9
6H		11.6	12.0	12.0	12.4	12.7	13.7	14.1	14.1	14.4	14.8
8H		11.5	11.9	11.9	12.3	12.7	13.6	14.0	14.0	14.4	14.7
12H		11.5	11.9	11.9	12.2	12.6	13.6	13.9	14.0	14.3	14.7
8H 4H		11.5	11.9	11.9	12.3	12.7	13.6	14.0	14.0	14.4	14.7
6H		11.4	11.8	11.9	12.2	12.6	13.5	13.8	13.9	14.2	14.7
8H		11.4	11.7	11.8	12.1	12.5	13.4	13.7	13.9	14.2	14.6
12H		11.3	11.6	11.8	12.0	12.5	13.4	13.6	13.9	14.1	14.6
12H 4H		11.5	11.8	11.9	12.2	12.6	13.6	13.9	14.0	14.3	14.7
6H		11.4	11.7	11.8	12.1	12.5	13.4	13.7	13.9	14.2	14.6
8H		11.3	11.6	11.8	12.0	12.5	13.4	13.6	13.9	14.1	14.6
Variations with the observer position at spacings(CIE Pub.117):											
S = 1.0H		+ 2.5 / - 4.6					+ 4.2 / - 7.6				
1.5H		+ 4.3 / - 3.7					+ 6.7 / - 6.6				
2.0H		+ 2.4 / - 5.3					+ 2.4 / - 3.6				

CIE Pub.117, 277.7 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -4.5)
Area: 0.00196 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:001
Test Date:2024-10-23

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:8.370m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:220.70V I:0.0233A P:4.6647W PF:0.9076 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:277.75x1 lm		
NAME: DL3526 3000K RA90 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 50	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	90	85	81	90	84	81	89	84	81	78
0.80	97	92	89	97	92	89	95	91	88	85
1.00	101	96	93	100	96	93	99	95	92	88
1.25	105	100	97	104	99	96	102	98	96	92
1.50	107	103	100	106	102	99	104	101	98	94
2.00	109	106	103	108	105	102	105	102	100	95
2.50	111	107	105	109	106	104	106	104	102	96
3.00	112	109	107	110	108	106	107	105	103	97
4.00	114	112	110	112	110	108	108	107	105	98
5.00	115	113	112	113	111	110	109	108	107	99
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: 001
 Test Date: 2024-10-23

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.456
 Humidity: 65.0%
 Test Distance: 8.370m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:220.70V I:0.0233A P:4.6647W PF:0.9076 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:277.75x1 lm		
NAME: DL3526 3000K RA90 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 50	Shielding Angle:

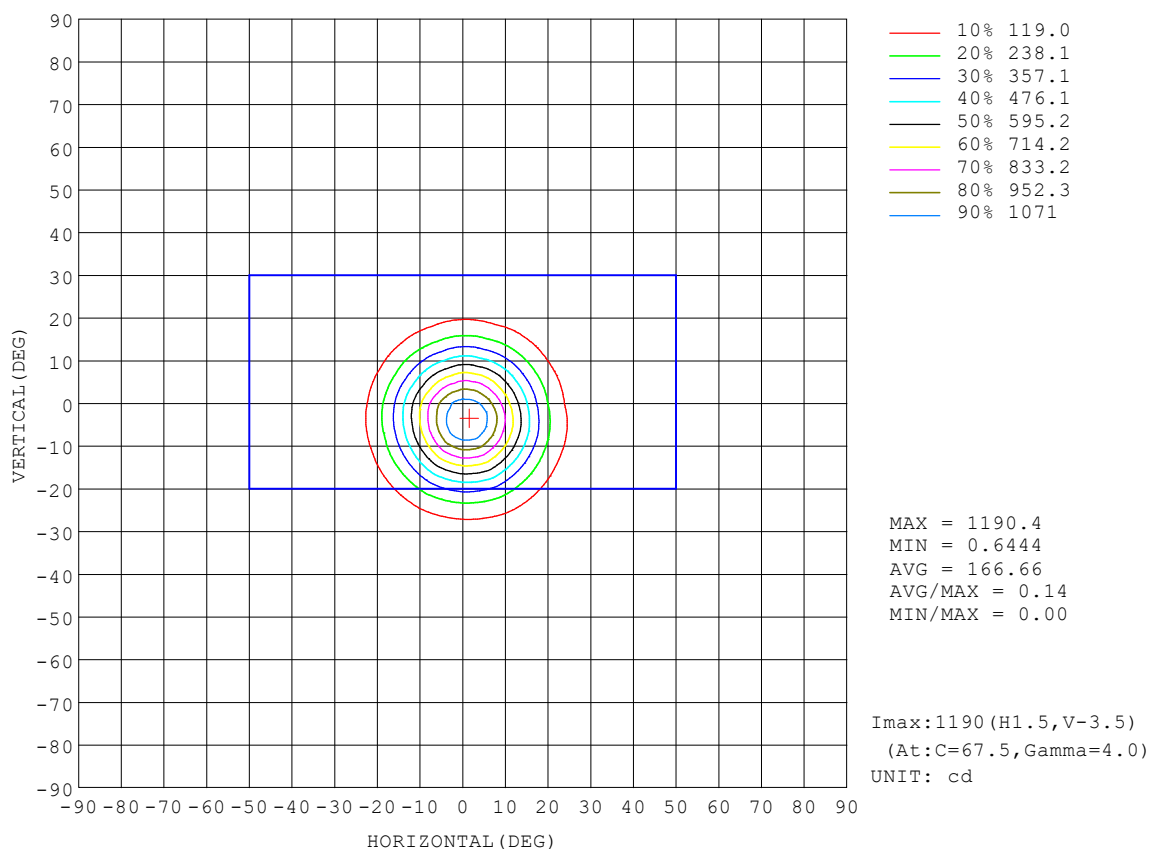


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:001
Test Date:2024-10-23

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:8.370m [K=1.0000]
Remarks:

AAI Figure

Test:U:220.70V I:0.0233A P:4.6647W PF:0.9076 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:277.75x1 lm		
NAME: DL3526 3000K RA90 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 50	Shielding Angle:

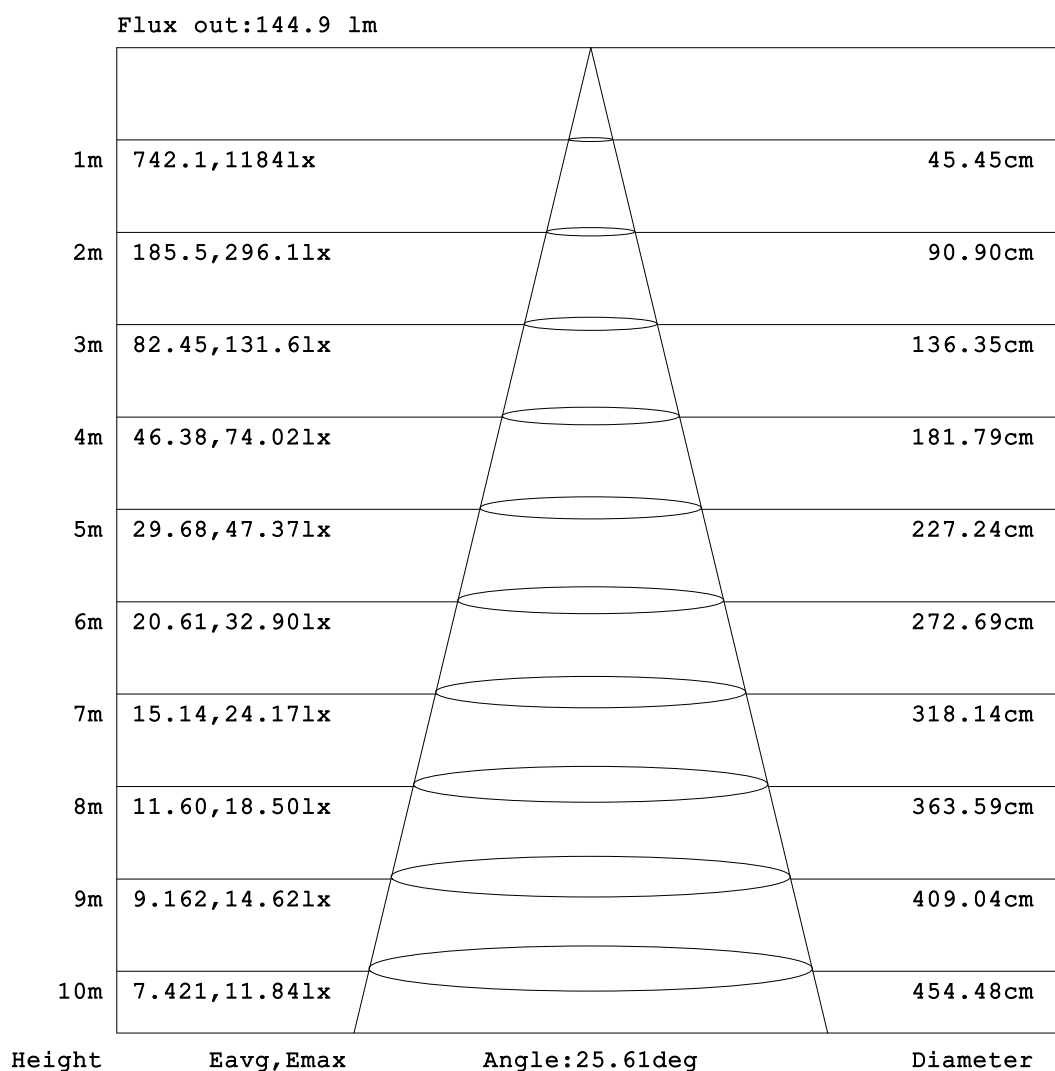


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: 001
Test Date: 2024-10-23

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity: 65.0%
Test Distance: 8.370m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:220.70V I:0.0233A P:4.6647W PF:0.9076 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:277.75x1 lm		
NAME: DL3526 3000K RA90 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 50	Shielding Angle:

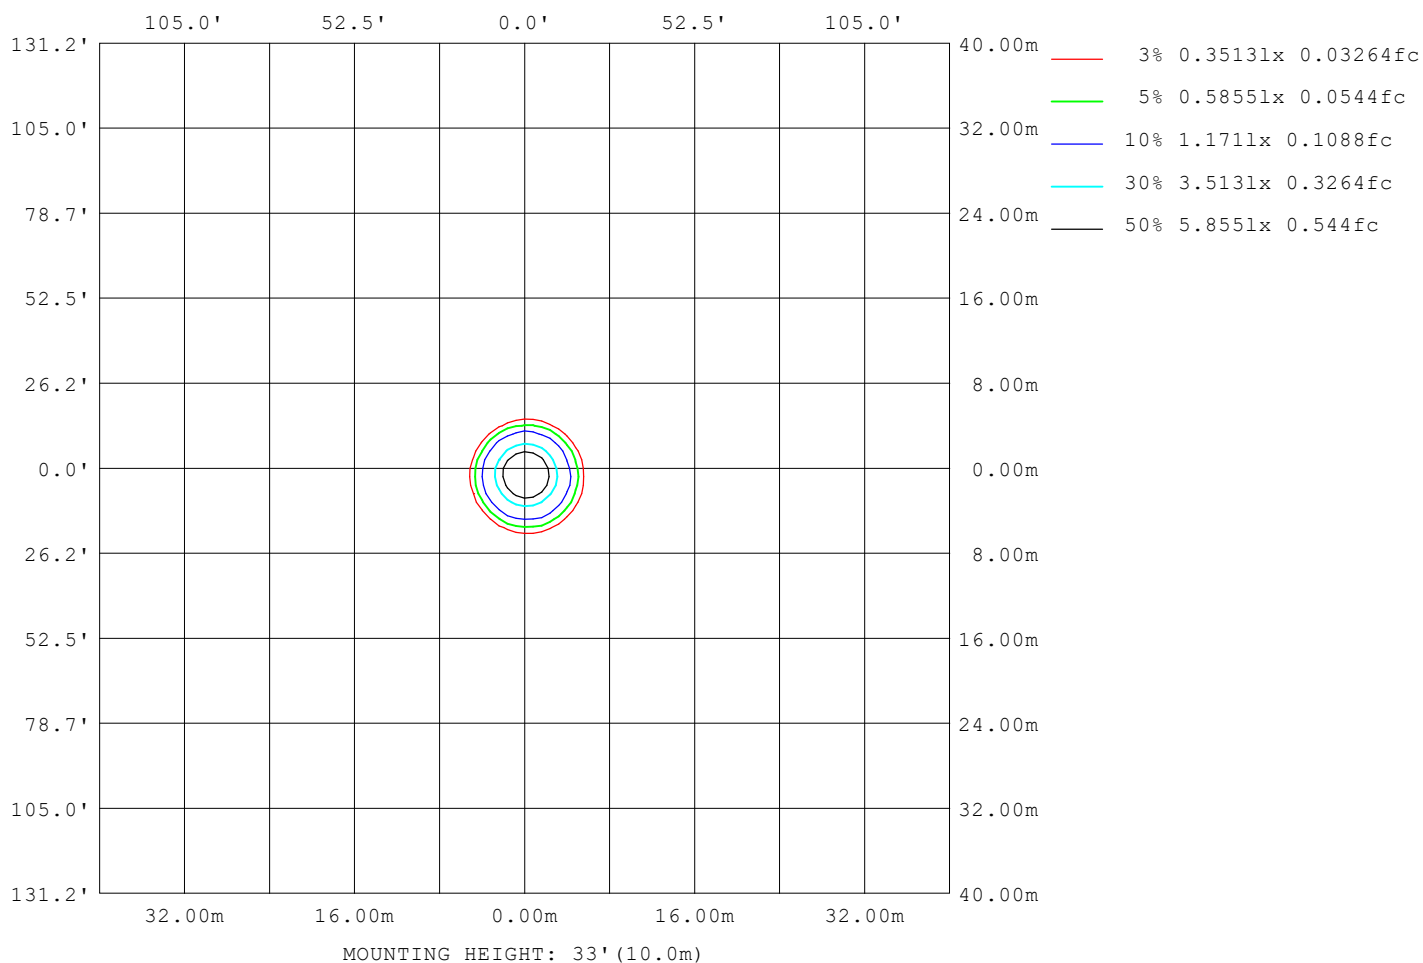

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: 001
Test Date: 2024-10-23

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity: 65.0%
Test Distance: 8.370m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:220.70V I:0.0233A P:4.6647W PF:0.9076 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:277.75x1 lm		
NAME: DL3526 3000K RA90 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 50	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	278
L_0~180 (75) av	43
L_0~180 (85) av	74
L_90~270 (65) av	269
L_90~270 (75) av	41
L_90~270 (85) av	80
L_45 (65) av	160
L_45 (75) av	40
L_45 (85) av	77

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:001
Test Date:2024-10-23

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:8.370m [K=1.0000]
Remarks:

Planar Illuminance Curve

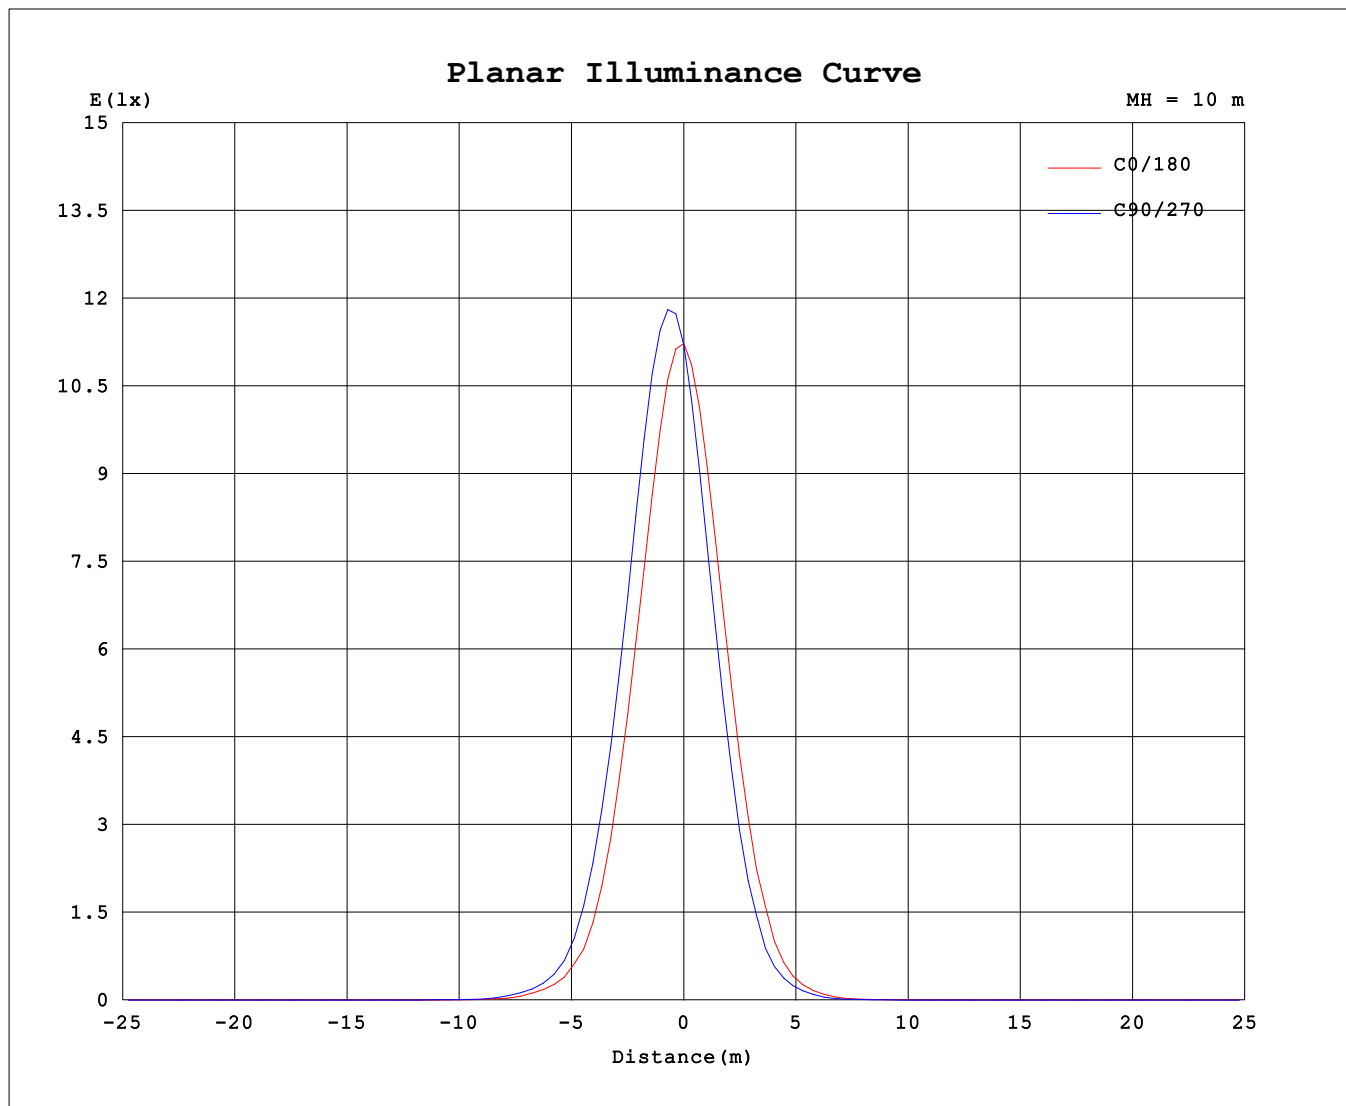

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3 °C
Operators: 001
Test Date: 2024-10-23

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity: 65.0%
Test Distance: 8.370m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.70V I:0.0233A P:4.6647W PF:0.9076 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:277.75x1 lm		
NAME: DL3526 3000K RA90 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 50	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	1115	1115	1115	1115	1115	1115	1115	1115	1115	1115	1115	1115	1115	1115	1115	1115			
5	1063	1125	1166	1196	1184	1165	1116	1065	1014	958	926	901	908	926	968	1014			
10	767	880	958	1020	1000	956	859	771	690	607	561	527	535	555	615	686			
15	533	638	716	773	753	711	615	531	456	381	339	308	317	335	388	454			
20	234	309	363	409	392	362	291	233	192	139	118	103	107	116	145	185			
25	114	166	192	223	210	189	146	111	84.2	63.3	53.3	47.0	49.4	54.7	68.9	88.2			
30	41.5	55.5	66.0	74.0	68.3	60.1	46.2	34.5	25.3	19.1	16.1	13.5	15.1	17.8	24.0	31.3			
35	21.3	29.2	34.6	38.3	34.3	29.6	21.6	15.1	9.73	6.42	5.61	5.13	5.49	6.19	8.70	13.4			
40	4.89	6.73	8.61	10.2	8.50	6.70	4.86	3.62	2.59	2.11	2.04	1.90	2.02	2.19	2.60	3.29			
45	2.39	2.87	3.45	4.00	3.40	2.79	2.17	1.85	1.64	1.43	1.36	1.38	1.40	1.53	1.72	2.01			
50	1.46	1.59	1.67	1.74	1.56	1.43	1.33	1.15	1.17	1.02	0.99	1.00	1.05	1.09	1.14	1.30			
55	1.16	1.25	1.31	1.32	1.23	1.13	1.09	0.97	1.08	0.87	0.80	0.74	0.82	0.87	0.90	1.01			
60	0.57	0.81	0.92	0.96	0.94	0.84	0.73	0.53	0.46	0.25	0.15	0.22	0.31	0.31	0.22	0.35			
65	0.20	0.27	0.38	0.47	0.48	0.36	0.24	0.19	0.31	0.09	0.03	0.05	0.13	0.12	0.06	0.14			
70	0.05	0.04	0.08	0.10	0.19	0.08	0.04	0.00	0.00	0.01	0.00	0.03	0.01	0.04	0.02	0.05			
75	0.04	0.02	0.04	0.01	0.04	0.00	0.02	0.00	0.00	0.01	0.00	0.03	0.01	0.04	0.02	0.04			
80	0.04	0.02	0.04	0.01	0.03	0.00	0.01	0.00	0.00	0.01	0.00	0.02	0.01	0.04	0.02	0.04			
85	0.04	0.02	0.04	0.01	0.03	0.00	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.04			
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.01	0.00	0.05	0.04	0.06	0.02	0.03	0.00			
125	0.02	0.03	0.00	0.01	0.00	0.03	0.01	0.07	0.07	0.08	0.14	0.13	0.15	0.12	0.11	0.05			
130	0.16	0.15	0.10	0.12	0.10	0.14	0.16	0.24	0.24	0.28	0.37	0.38	0.40	0.36	0.32	0.24			
135	0.33	0.30	0.23	0.25	0.24	0.29	0.33	0.43	0.42	0.49	0.59	0.62	0.64	0.59	0.54	0.44			
140	0.69	0.63	0.55	0.55	0.55	0.62	0.69	0.82	0.79	0.88	0.99	1.03	1.05	1.00	0.95	0.84			
145	0.96	0.90	0.82	0.82	0.82	0.90	0.97	1.10	1.07	1.16	1.26	1.31	1.33	1.29	1.23	1.12			
150	1.35	1.29	1.23	1.24	1.24	1.32	1.38	1.50	1.45	1.51	1.61	1.64	1.66	1.62	1.59	1.50			
155	1.55	1.51	1.46	1.48	1.48	1.55	1.59	1.69	1.65	1.67	1.75	1.76	1.78	1.74	1.73	1.66			
160	1.67	1.67	1.65	1.70	1.69	1.74	1.74	1.77	1.73	1.74	1.73	1.78	1.74	1.75	1.71	1.73			
165	1.65	1.64	1.67	1.70	1.71	1.73	1.75	1.72	1.68	1.67	1.62	1.64	1.59	1.62	1.59	1.65			
170	1.44	1.47	1.54	1.56	1.57	1.56	1.56	1.48	1.45	1.43	1.35	1.33	1.27	1.30	1.30	1.37			
175	1.29	1.32	1.38	1.38	1.39	1.36	1.38	1.30	1.30	1.30	1.23	1.18	1.13	1.15	1.16	1.20			
180	1.20	1.20	1.23	1.20	1.17	1.17	1.19	1.14	1.21	1.21	1.21	1.18	1.17	1.14	1.17	1.12			

C Range: 0 - 360DEG

C Interval: 22.5DEG

Test Speed: HIGH

Temperature:25.3℃

Operators:001

Test Date:2024-10-23

γ Range: 0 - 180DEG

γ Interval: 2.0DEG

Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456

Humidity:65.0%

Test Distance:8.370m [K=1.0000]

Remarks: