


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:221.06V I:0.2000A P:4.5241W PF:0.4245 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:271.675x1 lm		
NAME: DL3526 200mA 3000K Ra90 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 24	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 60.05 lm/W			
MODEL: 200mA 3000K Ra90 36D		I _{max} (cd)	1117	S/MH(C0/180)	0.51
NOMINAL POWER(W)	5	LOR(%)	100.0	S/MH(C90/270)	0.45
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	271.68	η UP,DN(C0-180)	0.5,47.4
NOMINAL FLUX(lm)	271.675	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.4,51.7
LAMPS INSIDE	1	η up (%)	0.9	CIBSE SHR NOM	0.00
TEST VOLTAGE(V)	220.75	η down (%)	99.1	CIBSE SHR MAX	0.30

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

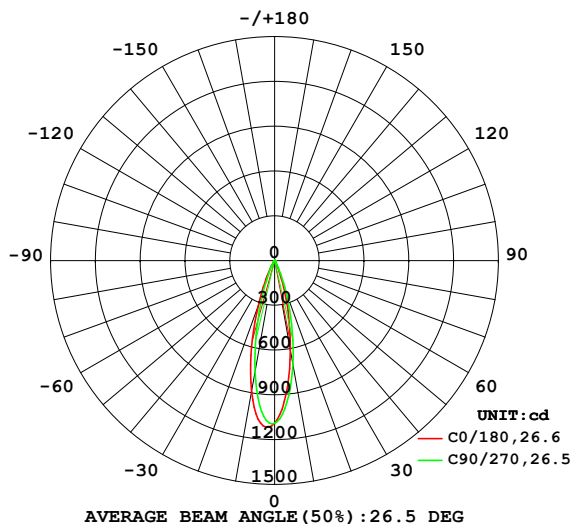

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

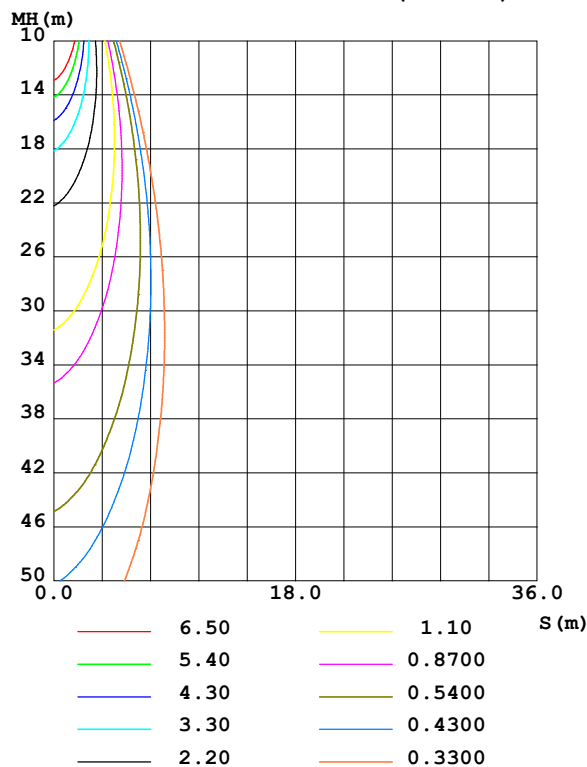

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3 °C
Operators: 001
Test Date: 2024-07-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity: 65.0%
Test Distance: 8.370m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	612.3	631.3	711.5	821.8	890.5	855.7	758.8	661.1	0- 10	86.35	86.35	31.8,31.8
20	158.3	180.7	227.1	289.2	323.8	287.3	220.0	176.0	10- 20	125.5	211.8	78,78
30	20.60	19.20	27.00	40.64	52.75	55.84	45.38	29.85	20- 30	47.39	259.2	95.4,95.4
40	1.557	1.995	2.439	3.298	3.743	2.995	2.220	1.795	30- 40	8.258	267.5	98.4,98.4
50	0.8289	0.8182	0.6970	0.8824	0.9669	1.168	1.264	0.9810	40- 50	1.072	268.5	98.8,98.8
60	0.2174	0.2148	0.2587	0.4544	0.6158	0.5127	0.3094	0.1709	50- 60	0.6365	269.2	99.1,99.1
70	0.0083	0.0390	0.0527	0.0306	0	0	0	0	60- 70	0.1118	269.3	99.1,99.1
80	0	0.0390	0.0444	0.0139	0	0	0	0	70- 80	0.0100	269.3	99.1,99.1
90	0	0	0	0	0	0	0	0	80- 90	0.0065	269.3	99.1,99.1
100	0	0	0	0	0	0	0	0	90-100	0	269.3	99.1,99.1
110	0	0	0	0	0	0	0	0	100-110	0	269.3	99.1,99.1
120	0.0055	0.0027	0	0	0	0	0.0001	0.0140	110-120	0.0006	269.3	99.1,99.1
130	0.3108	0.2804	0.2076	0.1516	0.1450	0.1534	0.1946	0.2659	120-130	0.0712	269.4	99.1,99.1
140	0.9307	0.8895	0.7700	0.6572	0.6208	0.6268	0.7189	0.8413	130-140	0.3504	269.7	99.3,99.3
150	1.523	1.482	1.402	1.313	1.296	1.300	1.379	1.457	140-150	0.6723	270.4	99.5,99.5
160	1.629	1.621	1.656	1.650	1.674	1.644	1.656	1.609	150-160	0.7220	271.1	99.8,99.8
170	1.260	1.311	1.415	1.474	1.506	1.499	1.416	1.282	160-170	0.4440	271.6	100,100
180	1.162	1.207	1.195	1.205	1.187	1.210	1.198	1.189	170-180	0.1232	271.7	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 268.09 lm

%lum = 98.7%

%lamp = 98.7%

Conical surface Flux(130deg): 269.25 lm

%lum = 99.1%


%lamp = 99.1%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:001
 Test Date:2024-07-18

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:8.370m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:221.06V I:0.2000A P:4.5241W PF:0.4245 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:271.675x1 lm		
NAME: DL3526 200mA 3000K Ra90 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 24	Shielding Angle:

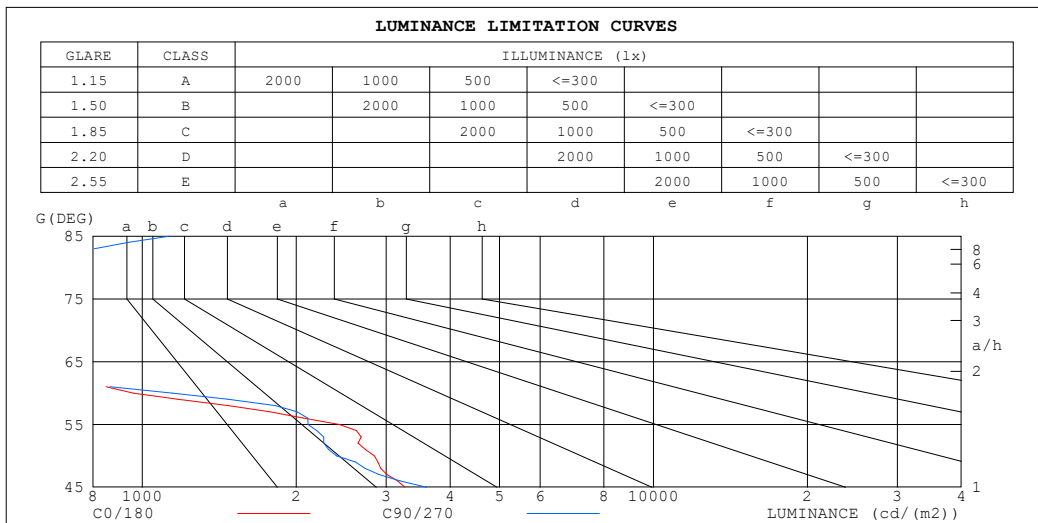

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	0	1126
80	0	565
75	47	379
70	54	341
65	538	480
60	960	1145
55	2431	2109
50	2846	2399
45	3265	3597


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:001
Test Date:2024-07-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:8.370m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:221.06V I:0.2000A P:4.5241W PF:0.4245 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:271.675x1 lm		
NAME: DL3526 200mA 3000K Ra90 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 24	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.01	1.01	1.01	.99
1.0	1.13	1.11	1.09	1.10	1.09	1.07	1.06	1.05	1.04	1.02	1.01	1.00	.99	.98	.97	.96
2.0	1.07	1.04	1.02	1.05	1.03	1.00	1.02	1.00	.98	.99	.97	.96	.96	.95	.94	.92
3.0	1.03	.99	.96	1.01	.98	.95	.99	.96	.94	.96	.94	.92	.94	.92	.91	.89
4.0	.98	.94	.91	.97	.94	.91	.95	.92	.90	.93	.91	.89	.91	.89	.87	.86
5.0	.95	.90	.87	.94	.90	.87	.92	.89	.86	.90	.88	.85	.89	.87	.85	.83
6.0	.91	.87	.84	.91	.87	.84	.89	.86	.83	.88	.85	.83	.87	.84	.82	.81
7.0	.88	.84	.81	.88	.84	.81	.86	.83	.80	.85	.82	.80	.84	.82	.79	.78
8.0	.85	.81	.78	.85	.81	.78	.84	.80	.78	.83	.80	.77	.82	.79	.77	.76
9.0	.83	.79	.76	.82	.78	.76	.81	.78	.75	.81	.77	.75	.80	.77	.75	.74
10.0	.80	.76	.73	.80	.76	.73	.79	.76	.73	.78	.75	.73	.78	.75	.73	.72

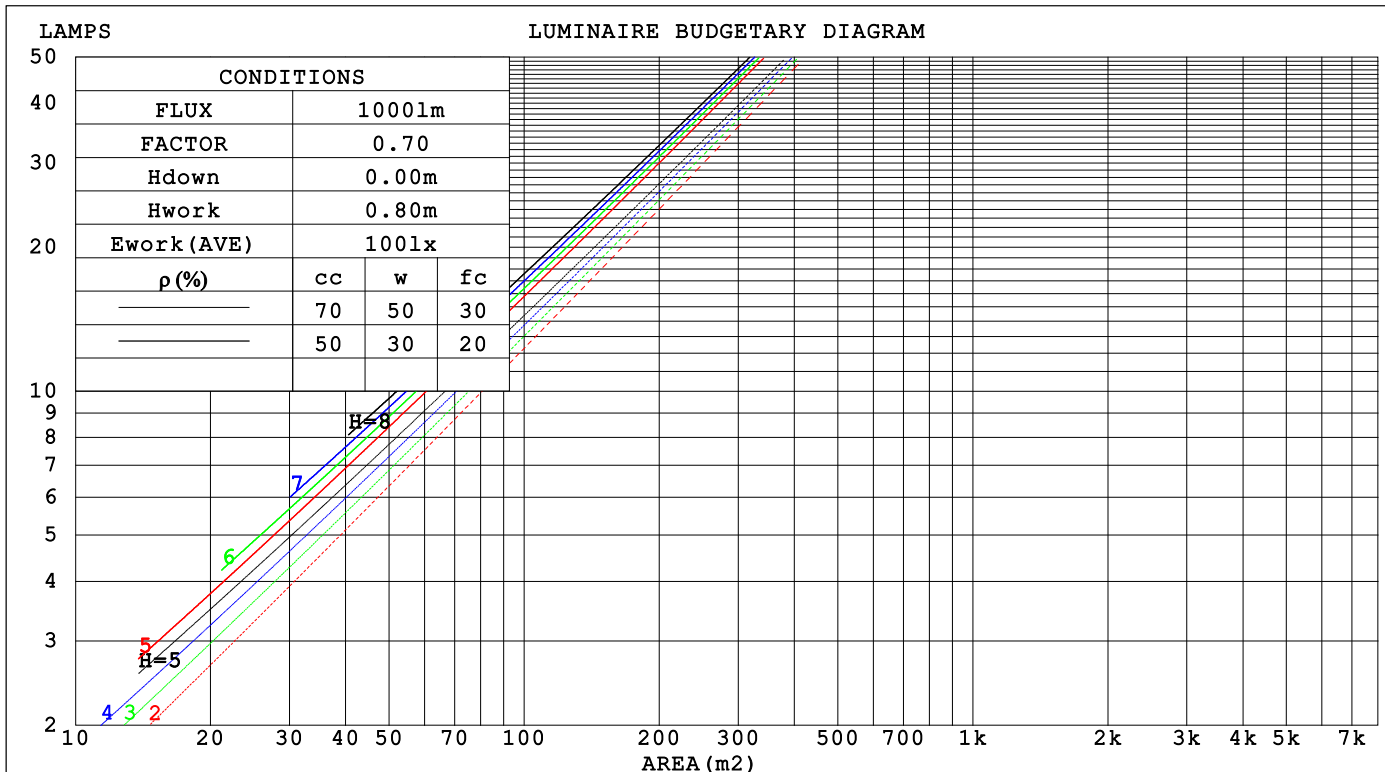

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:001
Test Date:2024-07-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:8.370m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:221.06V I:0.2000A P:4.5241W PF:0.4245 Freq:49.99Hz			UTHDi:0.00% ITHDi:0.00% KDisp:0			Lamp Flux:271.675x1 lm		
NAME: DL3526 200mA 3000K Ra90 36D			TYPE:			WEIGHT:		
SPEC.:			DIM.:			SERIAL No.:		
MFR.: VJC Lighting			SUR.: 24			Shielding Angle:		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.139	.079	.025	.132	.075	.024	.119	.068	.022	.107	.062	.020	.096	.056	.018		
2.0	.129	.071	.022	.123	.068	.021	.112	.062	.019	.102	.057	.018	.093	.053	.017		
3.0	.120	.064	.019	.115	.062	.019	.106	.058	.018	.098	.054	.016	.090	.050	.015		
4.0	.113	.059	.017	.109	.057	.017	.101	.054	.016	.094	.051	.015	.087	.048	.014		
5.0	.106	.054	.016	.103	.053	.015	.096	.050	.015	.090	.048	.014	.085	.045	.014		
6.0	.101	.051	.014	.098	.049	.014	.092	.047	.014	.087	.045	.013	.082	.043	.013		
7.0	.096	.047	.013	.093	.046	.013	.088	.045	.013	.084	.043	.012	.079	.041	.012		
8.0	.092	.045	.013	.089	.044	.012	.085	.042	.012	.081	.041	.012	.077	.039	.011		
9.0	.088	.042	.012	.086	.042	.012	.082	.040	.011	.078	.039	.011	.075	.038	.011		
10.0	.084	.040	.011	.082	.040	.011	.079	.039	.011	.075	.037	.011	.072	.036	.010		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)										
0.0	.197	.197	.197	.169	.169	.169	.115	.115	.115	.066	.066	.066	.021	.021	.021		
1.0	.175	.164	.155	.150	.141	.133	.103	.097	.092	.059	.056	.054	.019	.018	.017		
2.0	.157	.139	.125	.135	.120	.108	.092	.083	.075	.053	.048	.044	.017	.016	.014		
3.0	.142	.120	.102	.122	.104	.089	.084	.072	.062	.048	.042	.037	.016	.014	.012		
4.0	.130	.105	.085	.112	.091	.074	.077	.063	.052	.044	.037	.031	.014	.012	.010		
5.0	.120	.093	.072	.103	.080	.063	.071	.056	.045	.041	.033	.026	.013	.011	.009		
6.0	.111	.083	.062	.095	.072	.054	.066	.050	.038	.038	.029	.023	.012	.010	.008		
7.0	.103	.074	.054	.089	.065	.047	.061	.045	.033	.036	.027	.020	.012	.009	.007		
8.0	.097	.068	.048	.084	.059	.042	.058	.041	.029	.034	.024	.018	.011	.008	.006		
9.0	.091	.062	.042	.079	.054	.037	.055	.038	.026	.032	.022	.016	.010	.007	.005		
10.0	.087	.057	.038	.075	.050	.033	.052	.035	.024	.030	.021	.014	.010	.007	.005		

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:001
Test Date:2024-07-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:8.370m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:221.06V I:0.2000A P:4.5241W PF:0.4245 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:271.675x1 lm										
NAME: DL3526 200mA 3000K Ra90 36D					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: VJC Lighting					SUR.: 24			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	9.1	9.8	9.3	9.9	10.1	10.5	11.2	10.7	11.3	11.5
3H	9.0	9.6	9.2	9.8	10.0	10.4	11.0	10.6	11.2	11.4
4H	8.9	9.5	9.2	9.7	9.9	10.3	10.9	10.6	11.1	11.3
6H	8.8	9.4	9.1	9.6	9.9	10.2	10.8	10.5	11.0	11.3
8H	8.8	9.3	9.1	9.6	9.8	10.2	10.7	10.5	11.0	11.2
12H	8.7	9.2	9.0	9.5	9.8	10.2	10.7	10.5	10.9	11.2
4H 2H	8.9	9.5	9.2	9.7	10.0	10.3	10.9	10.6	11.1	11.3
3H	8.8	9.3	9.1	9.6	9.8	10.1	10.6	10.5	10.9	11.2
4H	8.7	9.1	9.0	9.4	9.8	10.0	10.5	10.4	10.8	11.1
6H	8.6	9.0	9.0	9.3	9.7	10.0	10.4	10.3	10.7	11.1
8H	8.5	8.9	8.9	9.3	9.6	9.9	10.3	10.3	10.7	11.1
12H	8.5	8.8	8.9	9.2	9.6	9.9	10.3	10.3	10.7	11.1
8H 4H	8.5	8.9	8.9	9.3	9.7	9.9	10.3	10.3	10.6	11.0
6H	8.4	8.7	8.8	9.1	9.6	9.8	10.1	10.2	10.5	11.0
8H	8.3	8.6	8.8	9.1	9.5	9.8	10.1	10.2	10.5	11.0
12H	8.3	8.5	8.8	9.0	9.5	9.8	10.0	10.3	10.5	11.0
12H 4H	8.5	8.8	8.9	9.2	9.6	9.8	10.2	10.3	10.6	11.0
6H	8.4	8.6	8.8	9.1	9.5	9.8	10.0	10.2	10.5	10.9
8H	8.3	8.5	8.8	9.0	9.5	9.7	10.0	10.2	10.4	10.9
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 2.8 / - 3.9					+ 3.4 / - 4.1				
1.5H	+ 3.7 / - 1.8					+ 5.0 / - 3.0				
2.0H	+ 2.7 / - 8.1					+ 2.9 / - 5.6				

CIE Pub.117, 271.7 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -4.5)
Area: 0.000452 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:001
Test Date:2024-07-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:8.370m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:221.06V I:0.2000A P:4.5241W PF:0.4245 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:271.675x1 lm		
NAME: DL3526 200mA 3000K Ra90 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 24	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	91	85	82	90	85	81	89	84	81	78
0.80	98	92	89	97	92	89	96	91	88	85
1.00	101	96	93	100	96	93	99	95	92	88
1.25	105	100	97	104	100	97	102	98	96	92
1.50	107	103	100	106	102	100	104	101	98	94
2.00	109	106	103	108	105	102	105	103	100	95
2.50	111	108	105	109	106	104	106	104	102	96
3.00	112	109	107	111	108	106	107	105	103	97
4.00	114	112	110	112	110	108	108	107	105	98
5.00	115	113	112	113	112	110	109	108	107	99
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3 °C
Operators: 001
Test Date: 2024-07-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity: 65.0%
Test Distance: 8.370m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:221.06V I:0.2000A P:4.5241W PF:0.4245 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:271.675x1 lm		
NAME: DL3526 200mA 3000K Ra90 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 24	Shielding Angle:

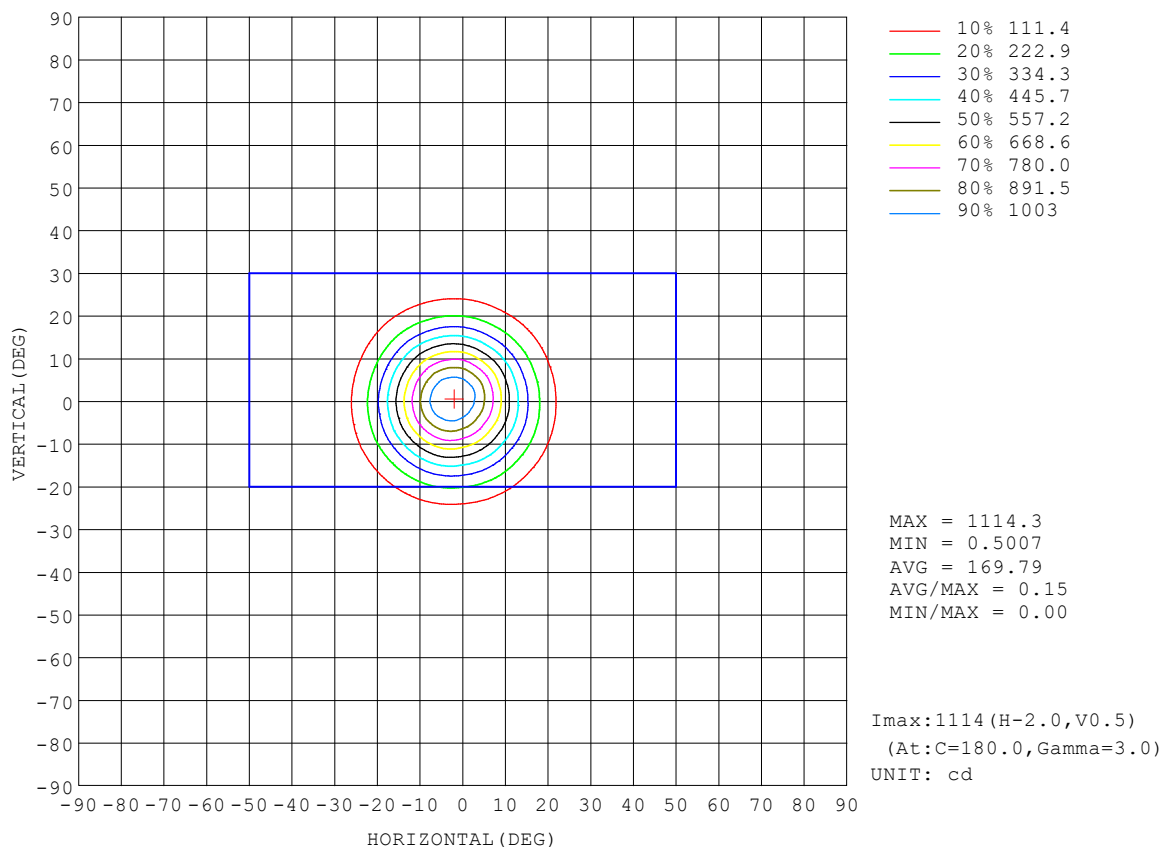


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:001
Test Date:2024-07-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:8.370m [K=1.0000]
Remarks:

AAI Figure

Test:U:221.06V I:0.2000A P:4.5241W PF:0.4245 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:271.675x1 lm		
NAME: DL3526 200mA 3000K Ra90 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 24	Shielding Angle:

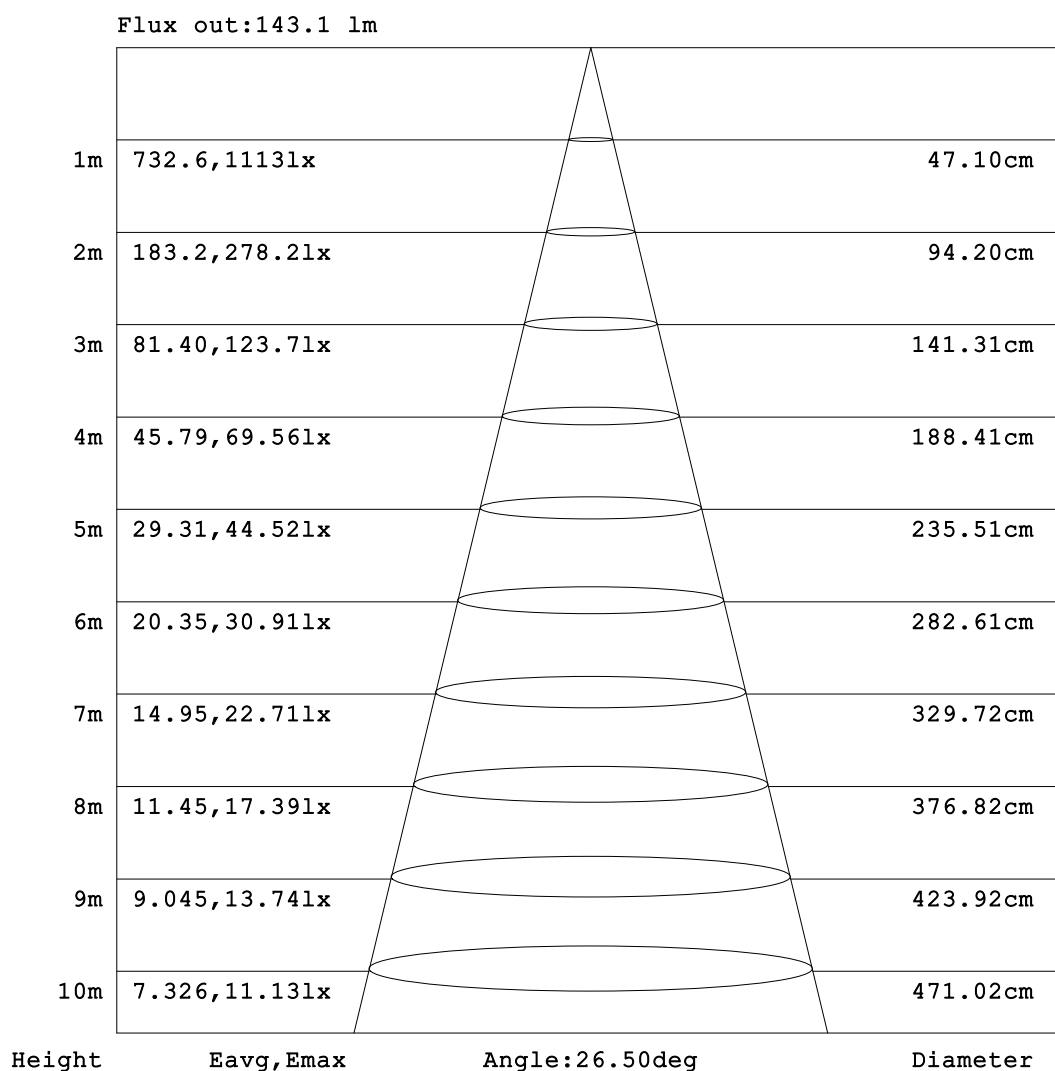


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:001
Test Date:2024-07-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:8.370m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:221.06V I:0.2000A P:4.5241W PF:0.4245 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:271.675x1 lm		
NAME: DL3526 200mA 3000K Ra90 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 24	Shielding Angle:

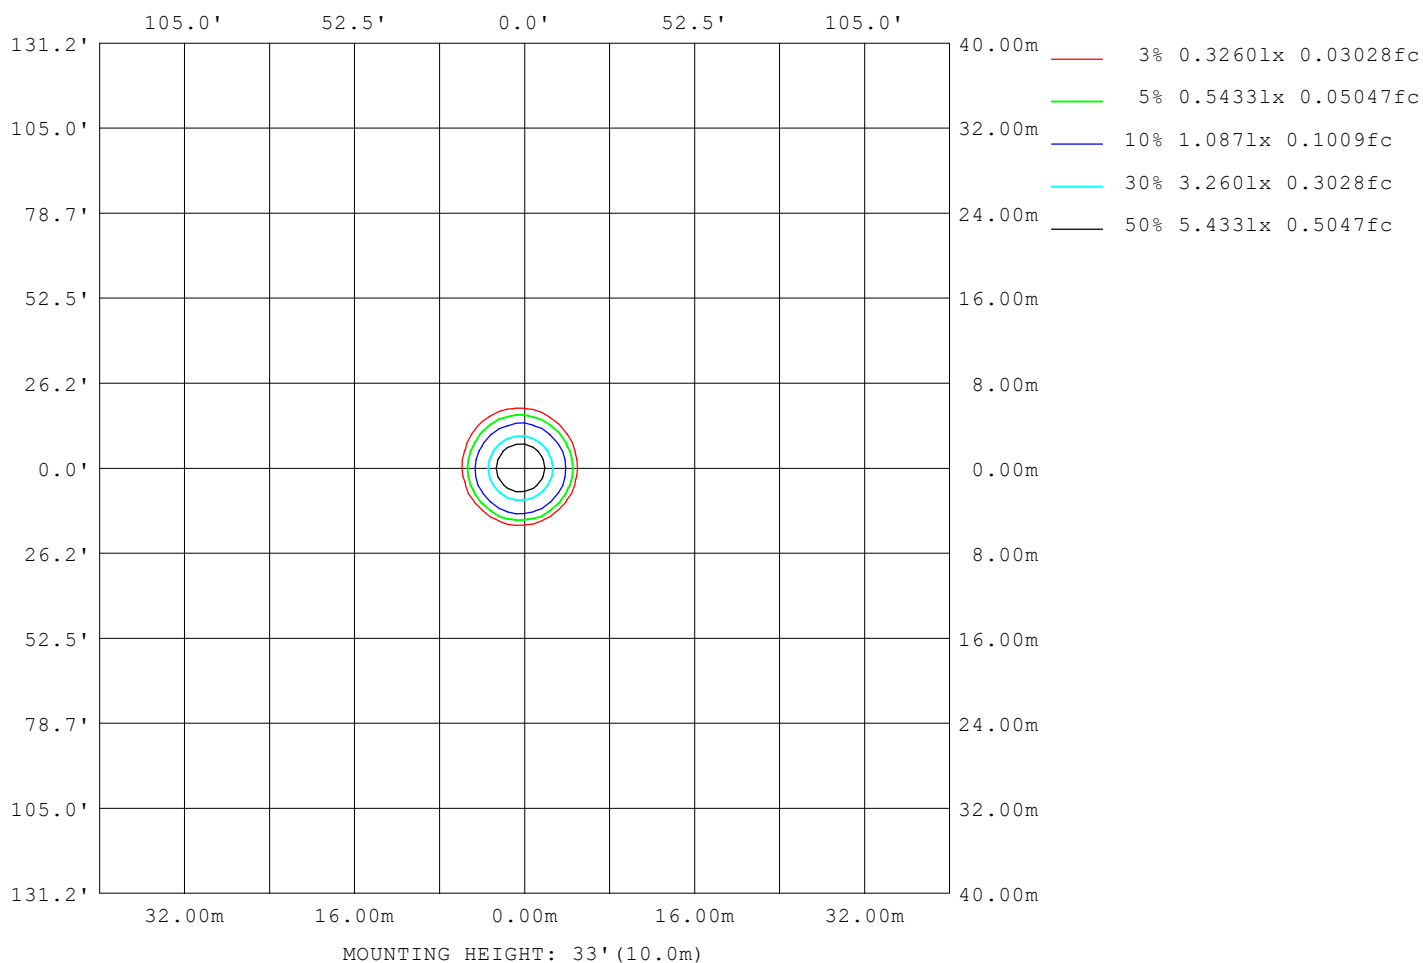

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: 001
Test Date: 2024-07-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity: 65.0%
Test Distance: 8.370m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:221.06V I:0.2000A P:4.5241W PF:0.4245 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:271.675x1 lm		
NAME: DL3526 200mA 3000K Ra90 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 24	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	749
L_0~180 (75) av	24
L_0~180 (85) av	0
L_90~270 (65) av	341
L_90~270 (75) av	190
L_90~270 (85) av	563
L_45 (65) av	425
L_45 (75) av	119
L_45 (85) av	335

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:001
Test Date:2024-07-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:8.370m [K=1.0000]
Remarks:

Planar Illuminance Curve

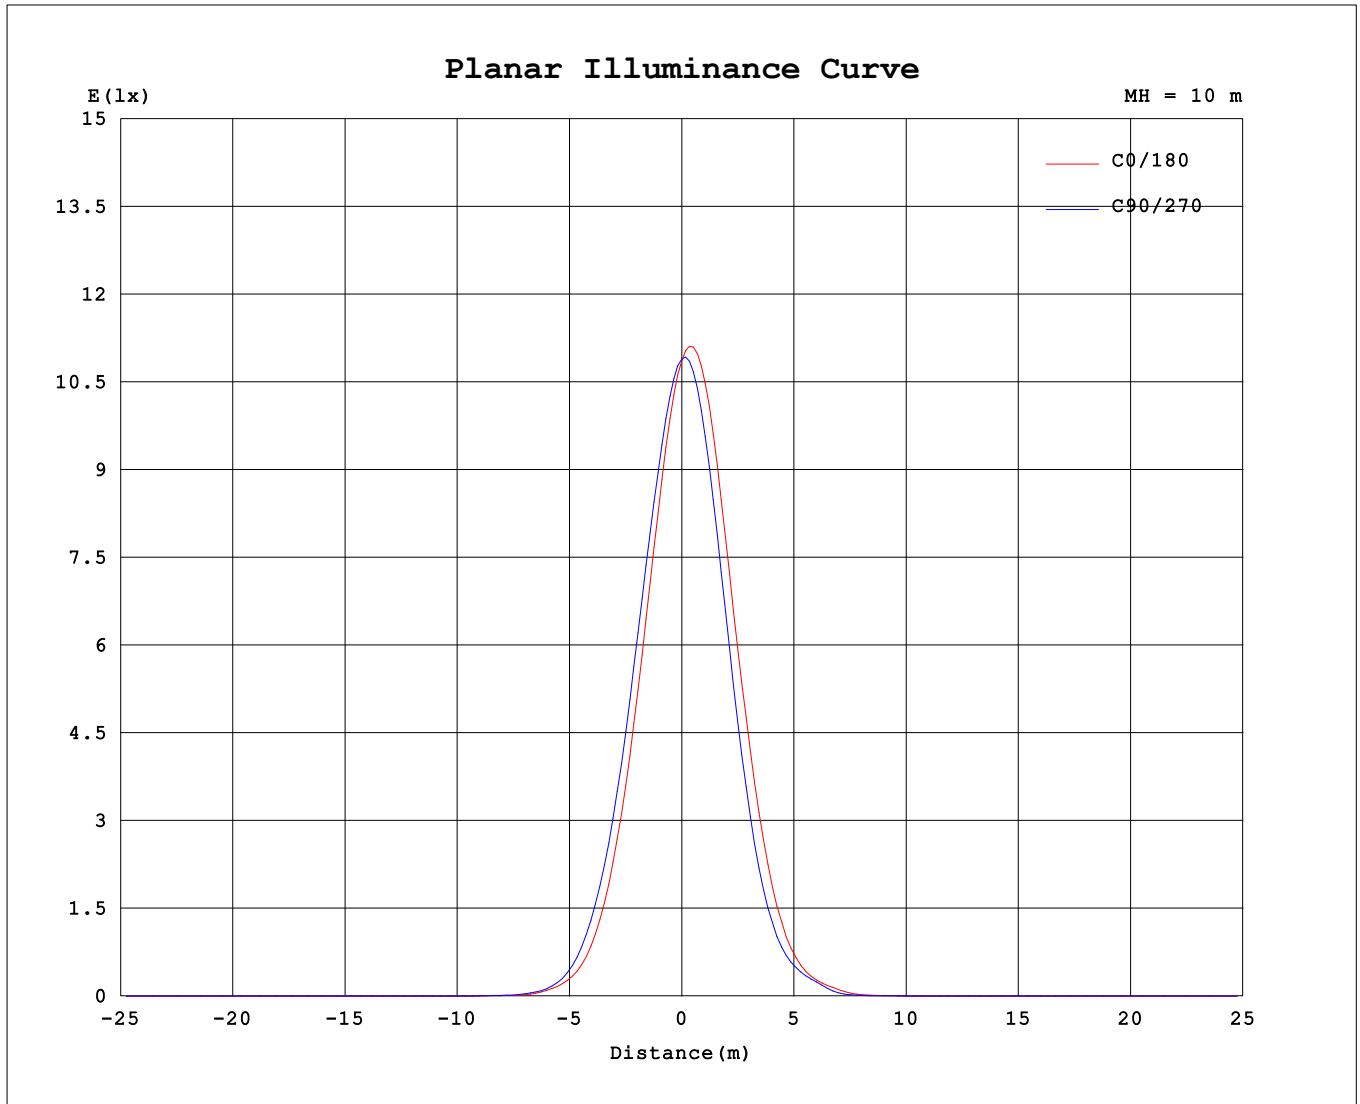

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators: 001
 Test Date: 2024-07-18

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.456
 Humidity: 65.0%
 Test Distance: 8.370m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:221.06V I:0.2000A P:4.5241W PF:0.4245 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:271.675x1 lm		
NAME: DL3526 200mA 3000K Ra90 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 24	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	1089	1089	1089	1089	1089	1089	1089	1089	1089	1089	1089	1089	1089	1089	1089	1089			
5	897	894	899	923	954	999	1037	1074	1092	1087	1076	1043	1013	973	945	915			
10	612	618	631	668	712	773	822	870	891	875	856	804	759	699	661	624			
15	348	360	376	408	443	498	540	581	596	579	558	505	459	407	377	352			
20	158	170	181	205	227	262	289	316	324	306	287	249	220	190	176	160			
25	57.5	59.7	65.2	77.0	89.7	110	122	135	137	127	119	105	93.4	79.9	69.2	61.1			
30	20.6	19.1	19.2	23.2	27.0	34.5	40.6	47.7	52.7	54.1	55.8	51.8	45.4	36.5	29.9	24.0			
35	4.55	4.72	5.04	6.09	7.28	10.3	13.4	17.6	20.5	20.8	19.4	14.2	10.4	7.23	5.85	4.79			
40	1.56	1.76	1.99	2.28	2.44	2.82	3.30	3.61	3.74	3.51	2.99	2.42	2.22	1.95	1.80	1.64			
45	1.05	1.05	1.11	1.12	1.15	1.21	1.35	1.34	1.33	1.39	1.51	1.57	1.45	1.45	1.20	1.10			
50	0.83	0.76	0.82	0.72	0.70	0.72	0.88	0.91	0.97	1.07	1.17	1.29	1.26	1.17	0.98	0.91			
55	0.63	0.57	0.64	0.58	0.55	0.55	0.68	0.72	0.84	0.94	1.03	1.12	1.06	0.93	0.74	0.63			
60	0.22	0.19	0.21	0.22	0.26	0.31	0.45	0.51	0.62	0.59	0.51	0.41	0.31	0.24	0.17	0.18			
65	0.10	0.06	0.08	0.07	0.09	0.08	0.13	0.13	0.18	0.20	0.11	0.11	0.04	0.03	0.00	0.02			
70	0.01	0.00	0.04	0.03	0.05	0.02	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
75	0.01	0.00	0.04	0.03	0.04	0.02	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
80	0.00	0.00	0.04	0.03	0.04	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
85	0.00	0.00	0.04	0.03	0.04	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
120	0.01	0.04	0.00	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.00			
125	0.12	0.14	0.10	0.11	0.06	0.07	0.03	0.04	0.03	0.01	0.04	0.02	0.06	0.05	0.10	0.09			
130	0.31	0.33	0.28	0.27	0.21	0.20	0.15	0.16	0.14	0.12	0.15	0.14	0.19	0.21	0.27	0.27			
135	0.60	0.61	0.55	0.53	0.45	0.42	0.36	0.36	0.34	0.31	0.35	0.35	0.42	0.45	0.52	0.54			
140	0.93	0.94	0.89	0.86	0.77	0.73	0.66	0.65	0.62	0.59	0.63	0.64	0.72	0.76	0.84	0.87			
145	1.27	1.27	1.22	1.18	1.10	1.06	0.99	0.98	0.95	0.92	0.96	0.98	1.05	1.10	1.17	1.20			
150	1.52	1.53	1.48	1.47	1.40	1.38	1.31	1.32	1.30	1.26	1.30	1.31	1.38	1.40	1.46	1.46			
155	1.65	1.64	1.62	1.63	1.61	1.60	1.55	1.57	1.57	1.53	1.57	1.56	1.61	1.60	1.60	1.60			
160	1.63	1.61	1.62	1.64	1.66	1.66	1.65	1.65	1.67	1.66	1.64	1.68	1.66	1.64	1.61	1.60			
165	1.47	1.45	1.51	1.52	1.60	1.59	1.64	1.62	1.65	1.65	1.64	1.66	1.61	1.58	1.48	1.46			
170	1.26	1.24	1.31	1.34	1.41	1.42	1.47	1.48	1.51	1.54	1.50	1.49	1.42	1.38	1.28	1.27			
175	1.13	1.14	1.19	1.19	1.22	1.23	1.31	1.29	1.31	1.36	1.34	1.31	1.24	1.23	1.18	1.14			
180	1.16	1.17	1.21	1.20	1.20	1.19	1.21	1.17	1.19	1.20	1.21	1.21	1.20	1.19	1.19	1.15			

C Range: 0 - 360DEG

C Interval: 22.5DEG

Test Speed: HIGH

Temperature:25.3℃

Operators:001

Test Date:2024-07-18

γ Range: 0 - 180DEG

γ Interval: 1.0DEG

Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456

Humidity:65.0%

Test Distance:8.370m [K=1.0000]

Remarks: