


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:220.67V I:0.0773A P:8.7318W PF:0.5117 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:587.766x1 lm		
NAME: DL3560 2700K 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 40	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 67.31 lm/W			
MODEL	DL3560 2700K 36D	I _{max} (cd)	1512	S/MH(C0/180)	0.59
NOMINAL POWER(W)	10	LOR(%)	100.0	S/MH(C90/270)	0.59
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	587.77	η UP,DN(C0-180)	0.3,48.5
NOMINAL FLUX(lm)	587.766	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.4,50.8
LAMPS INSIDE	1	η up (%)	0.7	CIBSE SHR NOM	0.50
TEST VOLTAGE(V)	220	η down (%)	99.3	CIBSE SHR MAX	0.60

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

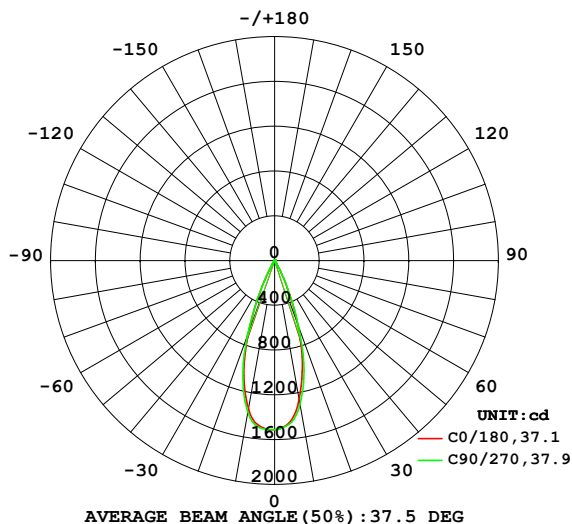

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

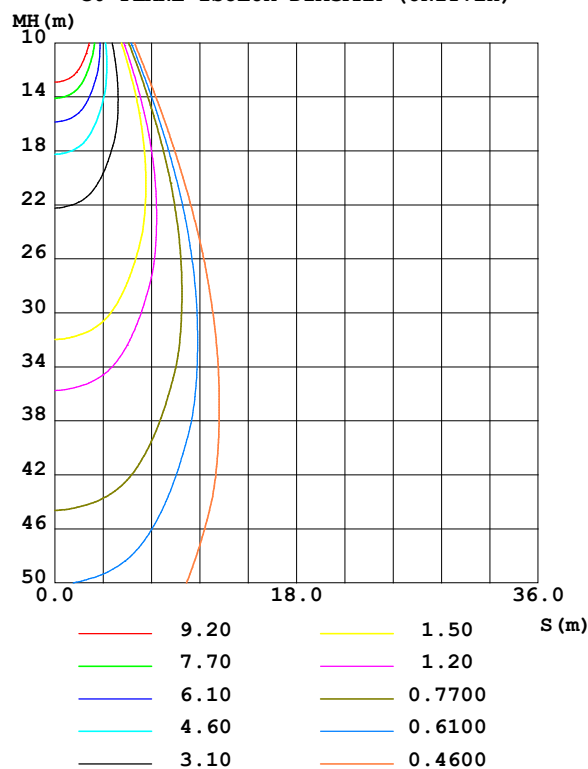

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3 °C
Operators: 001
Test Date: 2023-10-04

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity: 65.0%
Test Distance: 7.580m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1262	1244	1307	1352	1347	1359	1379	1344	0- 10	136.6	136.6	23.2,23.2
20	606.2	594.1	634.3	673.1	690.1	717.3	710.8	659.3	10- 20	279.0	415.5	70.7,70.7
30	82.35	76.61	88.87	97.92	96.22	95.74	87.08	85.53	20- 30	142.5	558.0	94.9,94.9
40	9.336	9.288	9.743	10.82	10.55	10.47	10.02	9.617	30- 40	20.14	578.2	98.4,98.4
50	1.389	1.413	1.501	1.554	1.521	1.489	1.449	1.393	40- 50	3.275	581.4	98.9,98.9
60	0.8893	0.8782	0.9263	0.9679	0.9554	0.9132	0.8773	0.8566	50- 60	1.005	582.4	99.1,99.1
70	0.4033	0.3871	0.4085	0.4415	0.4228	0.4045	0.3805	0.3719	60- 70	0.6098	583.0	99.2,99.2
80	0.1547	0.1495	0.1645	0.1795	0.1609	0.1400	0.1320	0.1238	70- 80	0.2846	583.3	99.2,99.2
90	0	0	0	0.0000	0	0	0	0	80- 90	0.0615	583.4	99.3,99.3
100	0	0	0	0	0	0	0	0	90-100	0.0001	583.4	99.3,99.3
110	0.0156	0.0135	0.0136	0.0069	0.0000	0	0	0.0000	100-110	0.0052	583.4	99.3,99.3
120	0.0447	0.0474	0.0410	0.0390	0.0786	0.0771	0.0846	0.0922	110-120	0.0278	583.4	99.3,99.3
130	0.2324	0.2303	0.2139	0.1927	0.5024	0.4894	0.5300	0.5777	120-130	0.1619	583.6	99.3,99.3
140	0.8899	0.8991	0.8631	0.8056	1.441	1.415	1.481	1.555	130-140	0.5574	584.1	99.4,99.4
150	1.989	1.996	1.942	1.865	2.677	2.650	2.688	2.743	140-150	1.074	585.2	99.6,99.6
160	2.919	2.910	2.891	2.842	3.549	3.543	3.546	3.507	150-160	1.291	586.5	99.8,99.8
170	3.170	3.187	3.195	3.219	3.506	3.535	3.486	3.429	160-170	0.9401	587.4	99.9,99.9
180	3.354	3.409	3.366	3.396	3.389	3.424	3.395	3.413	170-180	0.3200	587.8	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 580.47 lm

%lum = 98.8%

%lamp = 98.8%

Conical surface Flux(130deg): 582.8 lm

%lum = 99.2%


%lamp = 99.2%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:001
 Test Date:2023-10-04

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:7.580m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:220.67V I:0.0773A P:8.7318W PF:0.5117 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:587.766x1 lm		
NAME: DL3560 2700K 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 40	Shielding Angle:

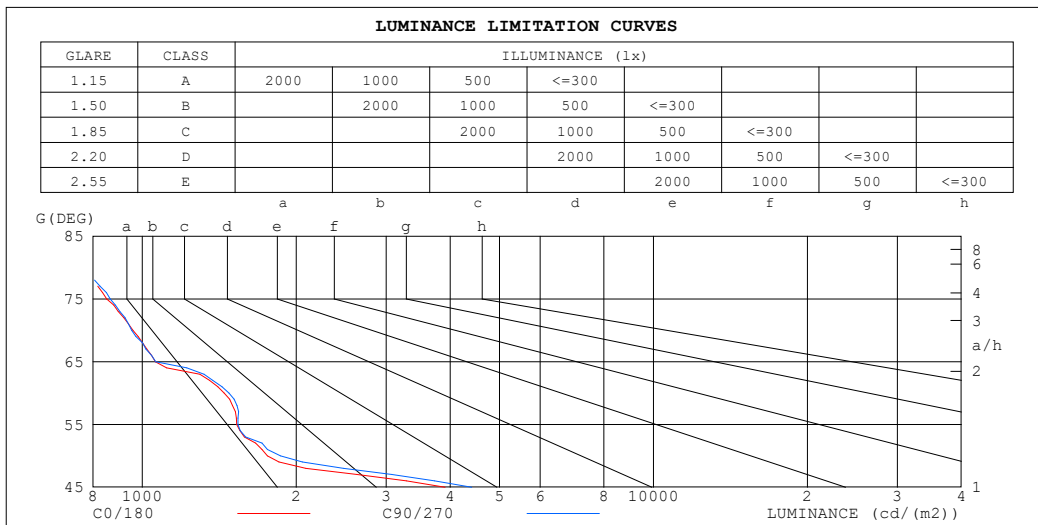


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: 001
Test Date: 2023-10-04

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity: 65.0%
Test Distance: 7.580m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.67V I:0.0773A P:8.7318W PF:0.5117 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:587.766x1 lm		
NAME: DL3560 2700K 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 40	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.01	1.01	1.01	.99
1.0	1.12	1.10	1.08	1.10	1.08	1.07	1.06	1.04	1.03	1.02	1.01	.00	.99	.98	.97	.95
2.0	1.06	1.03	1.00	1.05	1.02	.99	1.01	.99	.97	.98	.97	.95	.96	.94	.93	.91
3.0	1.01	.97	.94	.00	.96	.93	.97	.94	.92	.95	.92	.90	.93	.91	.89	.88
4.0	.97	.92	.89	.96	.92	.89	.94	.90	.88	.92	.89	.86	.90	.87	.85	.84
5.0	.93	.88	.85	.92	.88	.84	.90	.86	.84	.88	.85	.83	.87	.84	.82	.81
6.0	.89	.84	.81	.88	.84	.81	.87	.83	.80	.85	.82	.80	.84	.81	.79	.78
7.0	.85	.81	.78	.85	.80	.77	.84	.80	.77	.82	.79	.76	.81	.78	.76	.75
8.0	.82	.78	.74	.82	.77	.74	.81	.77	.74	.80	.76	.74	.79	.76	.73	.72
9.0	.79	.75	.72	.79	.74	.72	.78	.74	.71	.77	.74	.71	.76	.73	.71	.70
10.0	.76	.72	.69	.76	.72	.69	.75	.71	.69	.75	.71	.69	.74	.71	.68	.67

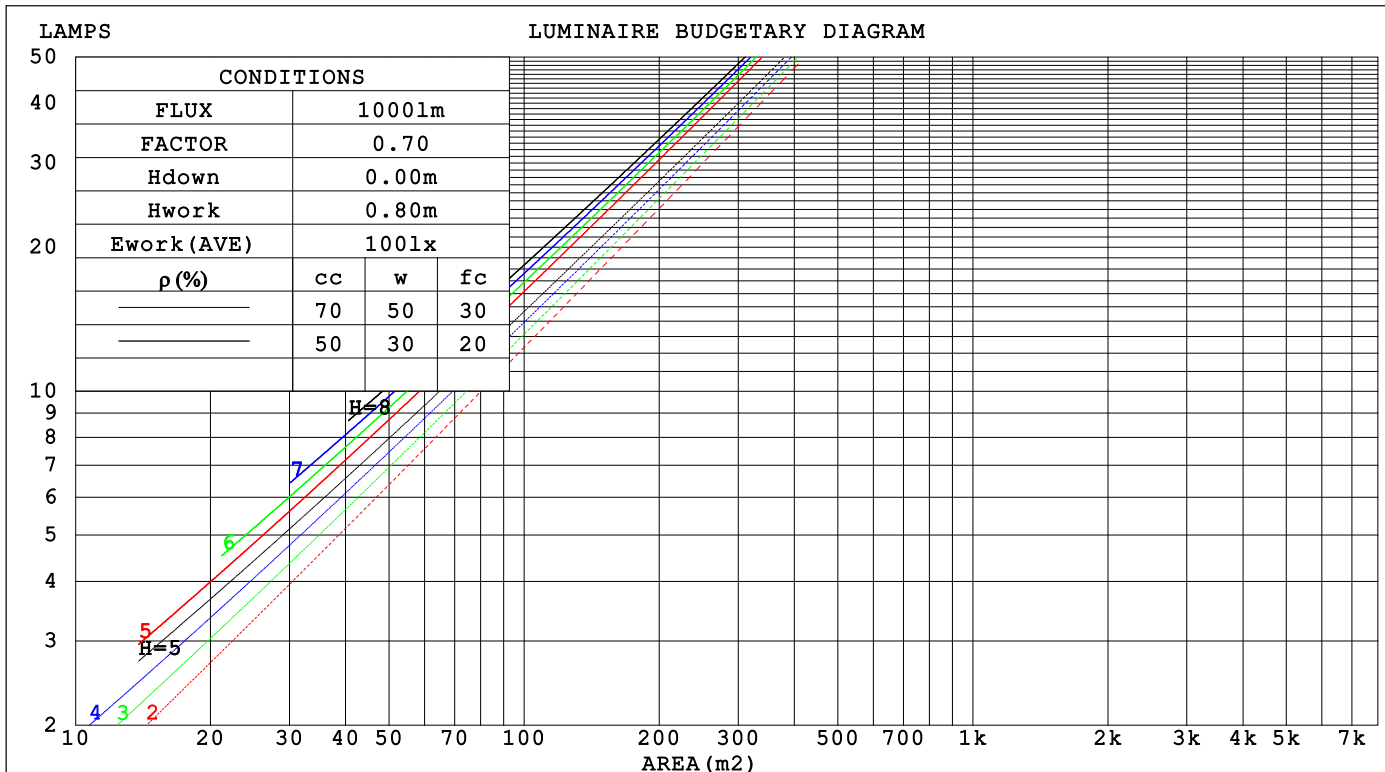

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:001
Test Date:2023-10-04

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:7.580m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:220.67V I:0.0773A P:8.7318W PF:0.5117 Freq:49.99Hz			UTHDi:0.00% ITHDi:0.00% KDisp:0			Lamp Flux:587.766x1 lm		
NAME: DL3560 2700K 36D			TYPE:			WEIGHT:		
SPEC.:			DIM.:			SERIAL No.:		
MFR.: VJC Lighting			SUR.: 40			Shielding Angle:		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.147	.083	.026	.140	.080	.025	.127	.073	.023	.115	.066	.021	.104	.060	.019		
2.0	.137	.075	.023	.131	.072	.022	.120	.067	.021	.111	.062	.019	.101	.057	.018		
3.0	.128	.068	.020	.123	.066	.020	.114	.062	.019	.106	.058	.018	.098	.054	.017		
4.0	.121	.063	.018	.117	.061	.018	.109	.058	.017	.102	.055	.017	.095	.052	.016		
5.0	.114	.058	.017	.111	.057	.017	.104	.054	.016	.098	.052	.015	.092	.049	.015		
6.0	.109	.055	.016	.106	.053	.015	.100	.051	.015	.095	.049	.014	.090	.047	.014		
7.0	.104	.051	.015	.101	.050	.014	.096	.049	.014	.091	.047	.014	.087	.045	.013		
8.0	.099	.049	.014	.097	.048	.013	.092	.046	.013	.088	.045	.013	.084	.043	.013		
9.0	.095	.046	.013	.093	.045	.013	.089	.044	.012	.085	.043	.012	.082	.042	.012		
10.0	.091	.044	.012	.090	.043	.012	.086	.042	.012	.083	.041	.012	.079	.040	.011		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)										
0.0	.196	.196	.196	.168	.168	.168	.114	.114	.114	.066	.066	.066	.021	.021	.021		
1.0	.175	.163	.153	.150	.140	.132	.102	.096	.091	.059	.056	.053	.019	.018	.017		
2.0	.157	.138	.123	.135	.119	.106	.092	.082	.074	.053	.048	.043	.017	.016	.014		
3.0	.143	.119	.100	.123	.103	.087	.084	.071	.061	.049	.042	.036	.016	.014	.012		
4.0	.131	.104	.083	.112	.090	.072	.077	.063	.051	.045	.037	.030	.014	.012	.010		
5.0	.121	.092	.070	.104	.079	.061	.072	.055	.043	.041	.033	.026	.013	.011	.008		
6.0	.113	.082	.060	.097	.071	.052	.067	.050	.037	.039	.029	.022	.012	.010	.007		
7.0	.105	.074	.052	.091	.064	.045	.063	.045	.032	.036	.027	.019	.012	.009	.006		
8.0	.099	.067	.046	.085	.058	.040	.059	.041	.028	.034	.024	.017	.011	.008	.006		
9.0	.094	.062	.040	.081	.054	.035	.056	.038	.025	.033	.022	.015	.011	.007	.005		
10.0	.089	.057	.036	.077	.050	.032	.053	.035	.022	.031	.021	.013	.010	.007	.004		

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:001
Test Date:2023-10-04

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:7.580m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:220.67V I:0.0773A P:8.7318W PF:0.5117 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:587.766x1 lm										
NAME: DL3560 2700K 36D					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: VJC Lighting					SUR.: 40			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	10.1	10.8	10.3	11.0	11.2	10.4	11.1	10.6	11.2	11.4
3H	10.0	10.7	10.3	10.9	11.1	10.3	10.9	10.5	11.1	11.3
4H	10.0	10.6	10.2	10.8	11.0	10.2	10.8	10.5	11.1	11.3
6H	9.9	10.5	10.2	10.7	11.0	10.2	10.7	10.5	11.0	11.2
8H	9.9	10.4	10.2	10.7	11.0	10.1	10.7	10.4	11.0	11.2
12H	9.8	10.4	10.2	10.7	10.9	10.1	10.6	10.4	10.9	11.2
4H 2H	9.9	10.5	10.2	10.8	11.0	10.2	10.8	10.4	11.0	11.2
3H	9.8	10.4	10.1	10.6	10.9	10.1	10.6	10.4	10.9	11.2
4H	9.8	10.3	10.1	10.6	10.9	10.0	10.5	10.4	10.8	11.1
6H	9.7	10.2	10.1	10.5	10.9	10.0	10.4	10.3	10.7	11.1
8H	9.7	10.1	10.1	10.5	10.8	9.9	10.3	10.3	10.7	11.1
12H	9.6	10.0	10.1	10.4	10.8	9.9	10.3	10.3	10.6	11.0
8H 4H	9.7	10.1	10.1	10.4	10.8	9.9	10.3	10.3	10.7	11.0
6H	9.6	9.9	10.0	10.3	10.8	9.8	10.2	10.3	10.6	11.0
8H	9.6	9.9	10.0	10.3	10.7	9.8	10.1	10.3	10.5	11.0
12H	9.5	9.8	10.0	10.2	10.7	9.8	10.0	10.2	10.5	11.0
12H 4H	9.6	10.0	10.0	10.4	10.8	9.8	10.2	10.3	10.6	11.0
6H	9.5	9.8	10.0	10.3	10.7	9.8	10.1	10.2	10.5	11.0
8H	9.5	9.8	10.0	10.2	10.7	9.7	10.0	10.2	10.5	10.9
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 3.4 / - 5.2					+ 3.4 / - 5.2				
1.5H	+ 5.8 / - 4.8					+ 5.8 / - 4.8				
2.0H	+ 3.4 / - 1.4					+ 3.9 / - 1.5				

CIE Pub.117, 587.8 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -1.8)
Area: 0.00125 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:001
Test Date:2023-10-04

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:7.580m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:220.67V I:0.0773A P:8.7318W PF:0.5117 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:587.766x1 lm		
NAME: DL3560 2700K 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 40	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	91	85	81	90	85	81	89	84	81	78
0.80	98	92	89	97	92	89	96	91	88	85
1.00	101	96	93	100	96	93	99	95	92	88
1.25	105	100	97	104	100	97	102	98	96	92
1.50	107	103	100	106	102	100	104	101	98	94
2.00	109	106	103	108	105	102	105	103	100	95
2.50	111	108	105	109	106	104	106	104	102	96
3.00	112	109	107	111	108	106	107	105	103	97
4.00	114	112	110	112	110	108	108	107	106	98
5.00	115	113	112	113	112	110	109	108	107	99
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3 °C
Operators: 001
Test Date: 2023-10-04

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity: 65.0%
Test Distance: 7.580m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.67V I:0.0773A P:8.7318W PF:0.5117 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:587.766x1 lm		
NAME: DL3560 2700K 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 40	Shielding Angle:

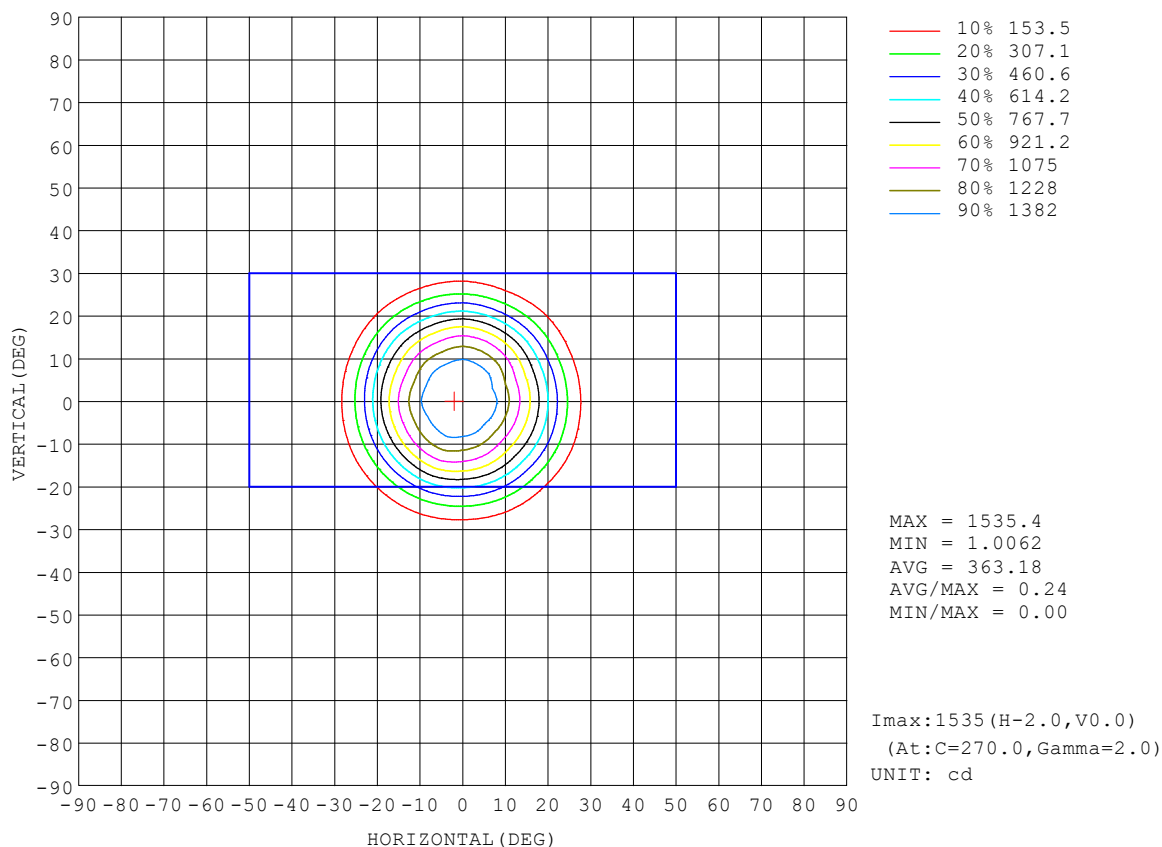


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:001
Test Date:2023-10-04

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:7.580m [K=1.0000]
Remarks:

AAI Figure

Test:U:220.67V I:0.0773A P:8.7318W PF:0.5117 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:587.766x1 lm		
NAME: DL3560 2700K 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 40	Shielding Angle:

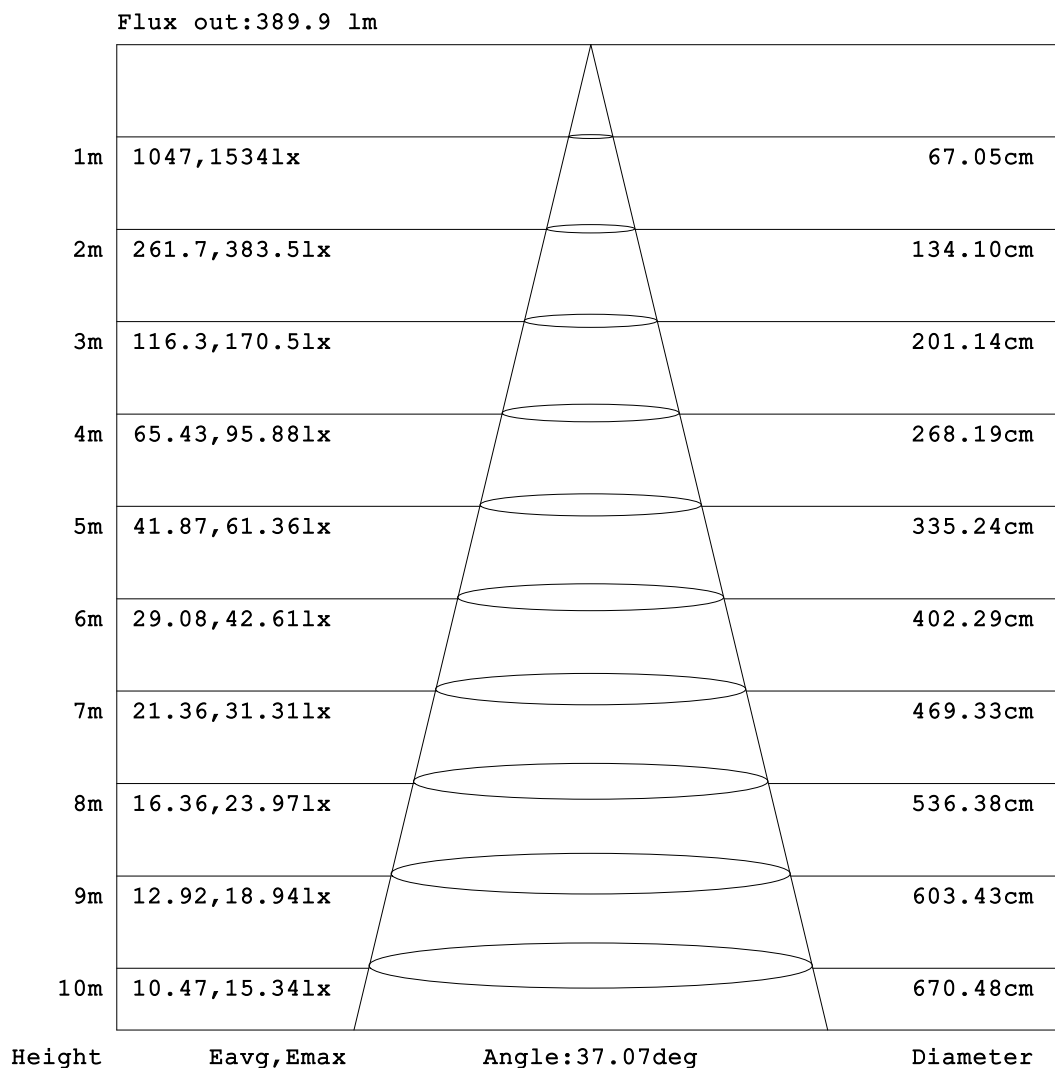


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:001
Test Date:2023-10-04

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:7.580m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:220.67V I:0.0773A P:8.7318W PF:0.5117 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:587.766x1 lm		
NAME: DL3560 2700K 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 40	Shielding Angle:

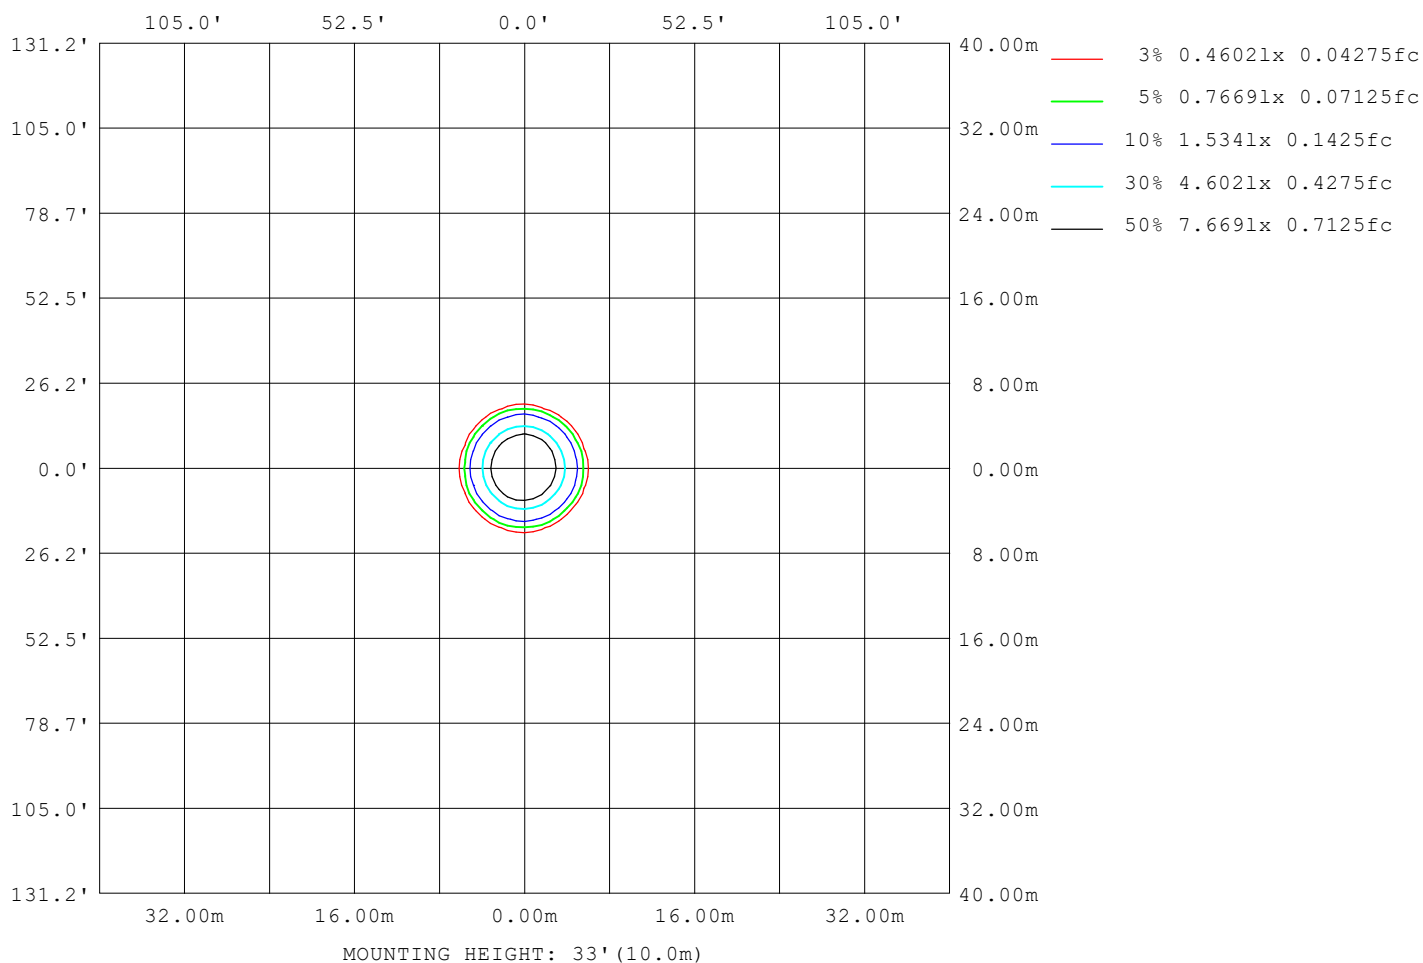

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: 001
Test Date: 2023-10-04

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity: 65.0%
Test Distance: 7.580m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:220.67V I:0.0773A P:8.7318W PF:0.5117 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:587.766x1 lm		
NAME: DL3560 2700K 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 40	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	1093
L_0~180 (75) av	848
L_0~180 (85) av	483
L_90~270 (65) av	1041
L_90~270 (75) av	814
L_90~270 (85) av	440
L_45 (65) av	1061
L_45 (75) av	823
L_45 (85) av	445

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:001
Test Date:2023-10-04

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:7.580m [K=1.0000]
Remarks:

Planar Illuminance Curve

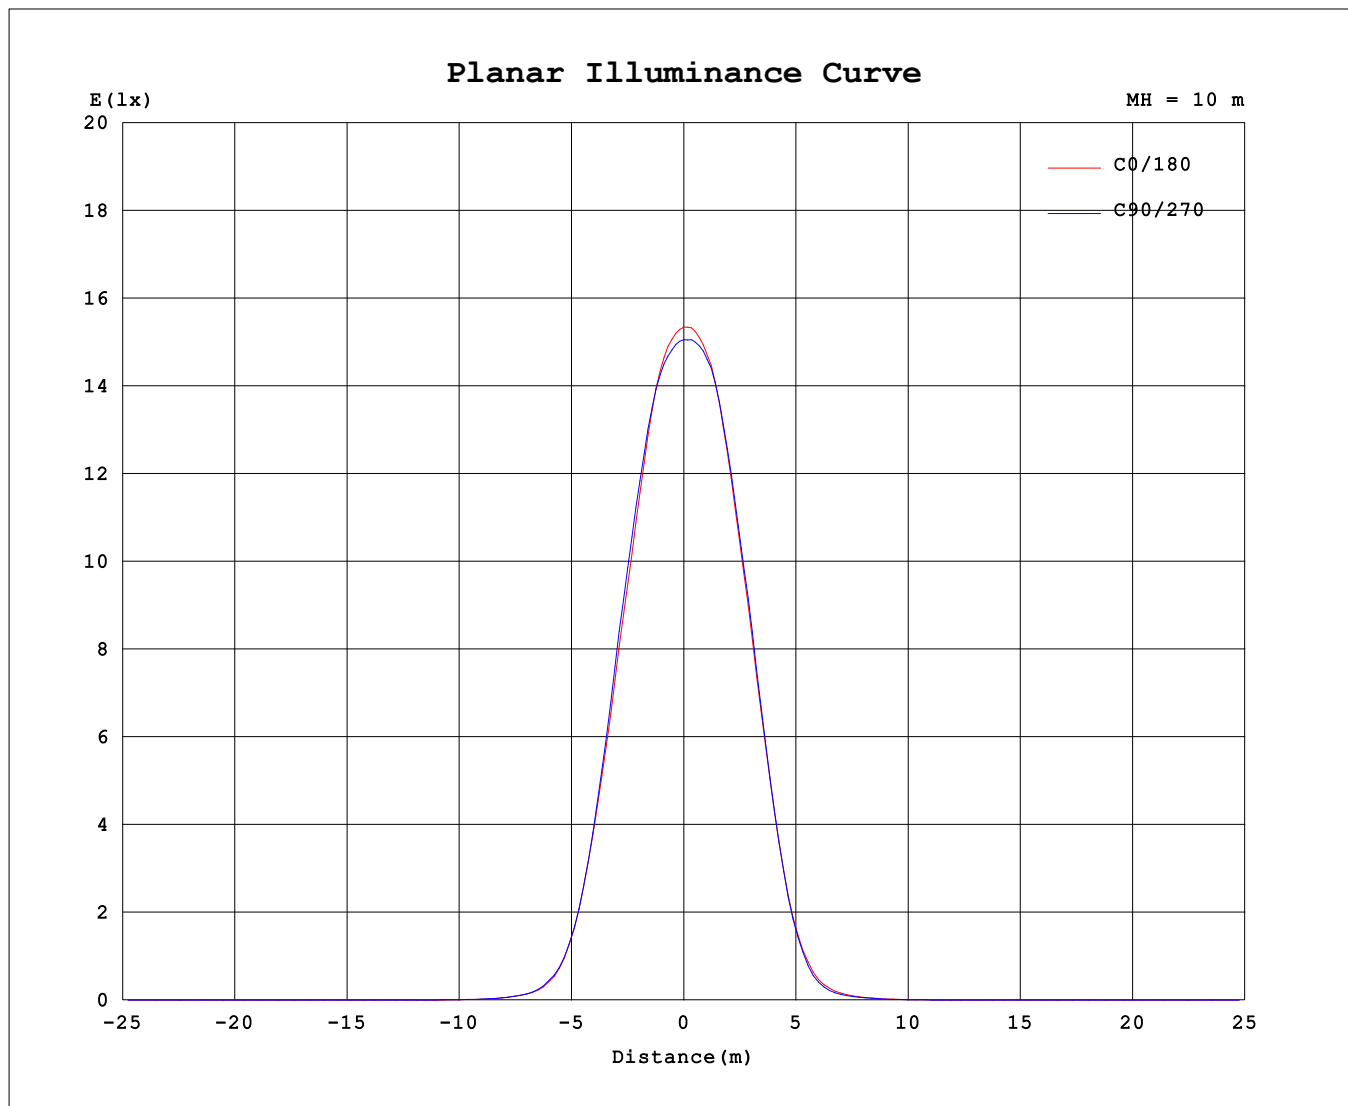

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3 °C
Operators: 001
Test Date: 2023-10-04

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity: 65.0%
Test Distance: 7.580m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.67V I:0.0773A P:8.7318W PF:0.5117 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:587.766x1 lm		
NAME: DL3560 2700K 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 40	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	1510	1510	1510	1510	1510	1510	1510	1510	1510	1510	1510	1510	1510	1510	1510	1510			
5	1458	1457	1450	1466	1471	1488	1486	1492	1487	1485	1493	1495	1501	1493	1491	1469			
10	1262	1249	1244	1282	1307	1348	1352	1355	1347	1333	1359	1358	1379	1362	1344	1291			
15	962	948	945	986	1017	1071	1075	1077	1065	1048	1079	1075	1100	1083	1051	989			
20	606	603	594	617	634	671	673	692	690	698	717	699	711	679	659	620			
25	277	278	262	275	283	299	308	319	316	326	334	322	317	295	291	277			
30	82.4	82.8	76.6	84.2	88.9	94.2	97.9	101	96.2	94.4	95.7	92.3	87.1	79.3	85.5	81.1			
35	25.1	24.9	23.5	24.8	26.4	28.6	28.5	29.5	28.9	26.9	26.3	24.9	24.6	23.4	24.0	23.8			
40	9.34	9.56	9.29	9.58	9.74	10.6	10.8	10.8	10.5	10.5	10.5	10.1	10.02	9.64	9.62	8.82			
45	3.40	3.64	3.56	3.80	3.90	4.14	4.05	3.73	3.76	4.07	4.07	3.92	3.95	3.79	3.65	3.19			
50	1.39	1.36	1.41	1.43	1.50	1.59	1.55	1.52	1.52	1.53	1.49	1.47	1.45	1.39	1.39	1.36			
55	1.08	1.05	1.07	1.07	1.11	1.11	1.17	1.12	1.13	1.13	1.09	1.10	1.06	1.07	1.04	1.05			
60	0.89	0.86	0.88	0.88	0.93	0.94	0.97	0.95	0.96	0.94	0.91	0.91	0.88	0.88	0.86	0.86			
65	0.55	0.52	0.54	0.52	0.56	0.57	0.61	0.64	0.60	0.60	0.57	0.57	0.54	0.55	0.52	0.54			
70	0.40	0.37	0.39	0.37	0.41	0.41	0.44	0.42	0.42	0.43	0.40	0.41	0.38	0.40	0.37	0.39			
75	0.27	0.25	0.26	0.24	0.28	0.27	0.30	0.28	0.28	0.29	0.26	0.28	0.25	0.26	0.24	0.26			
80	0.15	0.13	0.15	0.13	0.16	0.15	0.18	0.16	0.16	0.17	0.14	0.16	0.13	0.15	0.12	0.15			
85	0.06	0.03	0.05	0.03	0.06	0.05	0.08	0.05	0.05	0.07	0.04	0.06	0.03	0.05	0.02	0.05			
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
105	0.00	0.02	0.00	0.02	0.00	0.02	0.00	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
110	0.02	0.03	0.01	0.03	0.01	0.03	0.01	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
115	0.03	0.05	0.03	0.05	0.03	0.05	0.02	0.05	0.02	0.00	0.02	0.00	0.02	0.00	0.02	0.00			
120	0.04	0.07	0.05	0.07	0.04	0.07	0.04	0.06	0.08	0.05	0.08	0.06	0.08	0.07	0.09	0.07			
125	0.10	0.12	0.09	0.11	0.08	0.11	0.08	0.11	0.23	0.20	0.22	0.21	0.24	0.24	0.26	0.25			
130	0.23	0.25	0.23	0.24	0.21	0.22	0.19	0.21	0.50	0.47	0.49	0.49	0.53	0.55	0.58	0.57			
135	0.50	0.51	0.50	0.50	0.47	0.47	0.44	0.44	0.91	0.88	0.89	0.90	0.95	0.97	1.01	1.02			
140	0.89	0.91	0.90	0.90	0.86	0.85	0.81	0.79	1.44	1.41	1.42	1.43	1.48	1.51	1.55	1.57			
145	1.42	1.43	1.42	1.42	1.38	1.35	1.30	1.28	2.05	2.02	2.02	2.04	2.08	2.11	2.15	2.18			
150	1.99	2.00	2.00	1.99	1.94	1.92	1.86	1.85	2.68	2.64	2.65	2.65	2.69	2.71	2.74	2.77			
155	2.53	2.55	2.53	2.53	2.49	2.46	2.41	2.41	3.21	3.17	3.19	3.18	3.21	3.20	3.22	3.22			
160	2.92	2.95	2.91	2.93	2.89	2.88	2.84	2.87	3.55	3.51	3.54	3.52	3.55	3.51	3.51	3.47			
165	3.10	3.12	3.11	3.15	3.11	3.12	3.09	3.13	3.59	3.60	3.61	3.61	3.61	3.54	3.51	3.49			
170	3.17	3.20	3.19	3.23	3.19	3.23	3.22	3.27	3.51	3.55	3.54	3.52	3.49	3.47	3.43	3.41			
175	3.23	3.27	3.27	3.30	3.25	3.30	3.32	3.36	3.41	3.46	3.47	3.43	3.41	3.41	3.41	3.34			
180	3.35	3.38	3.41	3.40	3.37	3.38	3.40	3.38	3.39	3.39	3.42	3.39	3.40	3.38	3.41	3.36			

C Range: 0 - 360DEG

C Interval: 22.5DEG

Test Speed: HIGH

Temperature:25.3℃

Operators:001

Test Date:2023-10-04

γ Range: 0 - 180DEG

γ Interval: 1.0DEG

Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456

Humidity:65.0%

Test Distance:7.580m [K=1.0000]

Remarks: