


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:220.52V I:0.0724A P:15.568W PF:0.9754 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1243.01x1 lm		
NAME: DL3717 3000K RA90 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 72	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 79.84 lm/W			
MODEL	DL3717 3000K RA90 36D	I _{max} (cd)	1925	S/MH(C0/180)	0.72
NOMINAL POWER(W)	15	LOR(%)	100.0	S/MH(C90/270)	0.62
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	1243.0	η UP,DN(C0-180)	0.3,50.7
NOMINAL FLUX(lm)	1243.01	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.4,48.6
LAMPS INSIDE	1	η up (%)	0.7	CIBSE SHR NOM	0.50
TEST VOLTAGE(V)	220	η down (%)	99.3	CIBSE SHR MAX	0.60

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

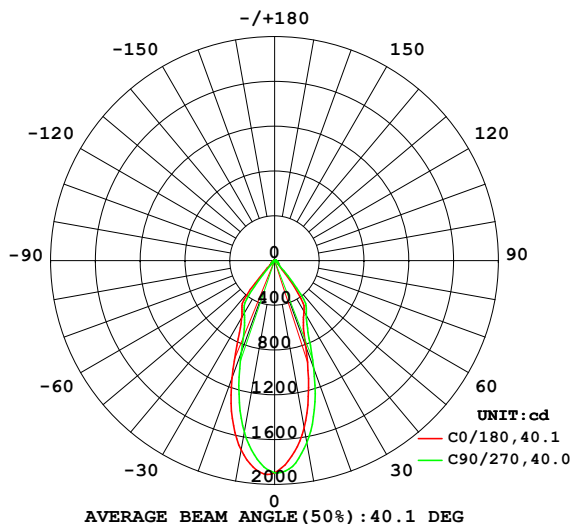

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

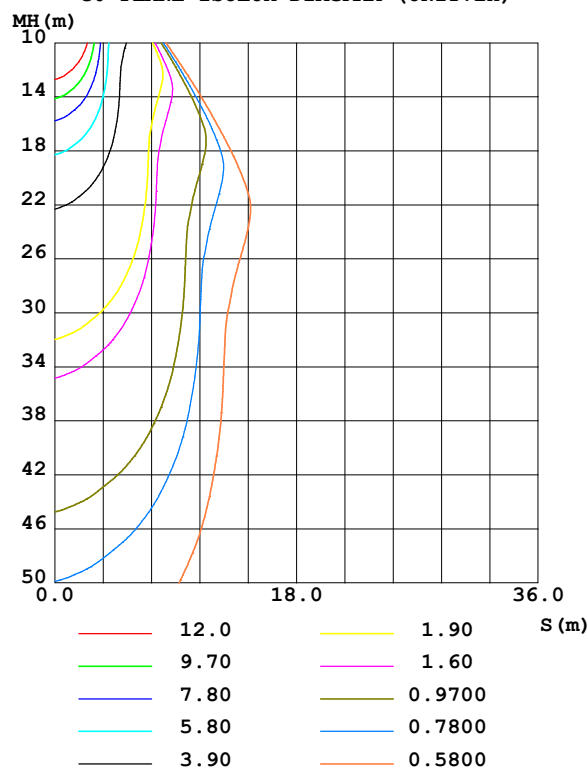

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3℃
Operators: Lihong yun
Test Date: 2023-03-15

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity: 65.0%
Test Distance: 7.580m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1518	1576	1655	1726	1719	1663	1558	1493	0- 10	166.8	166.8	13.4,13.4
20	813.3	889.4	1023	1132	1115	1018	875.3	795.4	10- 20	359.5	526.4	42.3,42.3
30	526.6	540.0	569.8	597.9	590.2	569.7	544.0	525.5	20- 30	323.6	849.9	68.4,68.4
40	106.5	146.4	251.1	335.5	338.2	281.3	171.7	104.0	30- 40	270.3	1120	90.1,90.1
50	37.10	39.20	42.72	46.20	46.32	43.39	38.34	36.09	40- 50	61.45	1182	95.1,95.1
60	20.64	21.72	24.22	26.85	27.46	25.66	22.90	20.74	50- 60	28.53	1210	97.4,97.4
70	7.798	8.541	9.871	10.78	10.25	9.438	8.185	7.472	60- 70	15.90	1226	98.6,98.6
80	2.519	2.942	3.719	4.247	3.960	3.495	2.794	2.351	70- 80	6.216	1232	99.1,99.1
90	0.0577	0.0543	0.1262	0.4204	0.3082	0.0900	0.0572	0.0623	80- 90	1.575	1234	99.3,99.3
100	0.0865	0.0769	0.0708	0.0576	0.0955	0.0928	0.1053	0.1154	90-100	0.0808	1234	99.3,99.3
110	0.1928	0.1694	0.1417	0.1290	0.2466	0.2627	0.3297	0.3922	100-110	0.1534	1234	99.3,99.3
120	0.5719	0.5218	0.4362	0.3797	0.6973	0.7422	0.8514	0.9594	110-120	0.4124	1235	99.3,99.3
130	1.215	1.127	0.9870	0.8910	1.477	1.571	1.787	1.969	120-130	0.8763	1235	99.4,99.4
140	2.260	2.117	1.901	1.759	2.762	2.896	3.153	3.371	130-140	1.482	1237	99.5,99.5
150	3.533	3.368	3.157	2.960	4.209	4.320	4.600	4.739	140-150	1.990	1239	99.7,99.7
160	4.654	4.568	4.403	4.241	5.340	5.428	5.571	5.591	150-160	2.039	1241	99.8,99.8
170	5.431	5.426	5.391	5.285	5.996	5.992	5.934	5.878	160-170	1.512	1242	100,100
180	5.949	6.017	5.900	5.910	6.020	6.060	5.938	5.934	170-180	0.5516	1243	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 1162.6 lm

%lum = 93.5%

%lamp = 93.5%

Conical surface Flux(130deg): 1220 lm

%lum = 98.1%


%lamp = 98.1%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:Lihong yun
 Test Date:2023-03-15

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:7.580m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:220.52V I:0.0724A P:15.568W PF:0.9754 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1243.01x1 lm		
NAME: DL3717 3000K RA90 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 72	Shielding Angle:

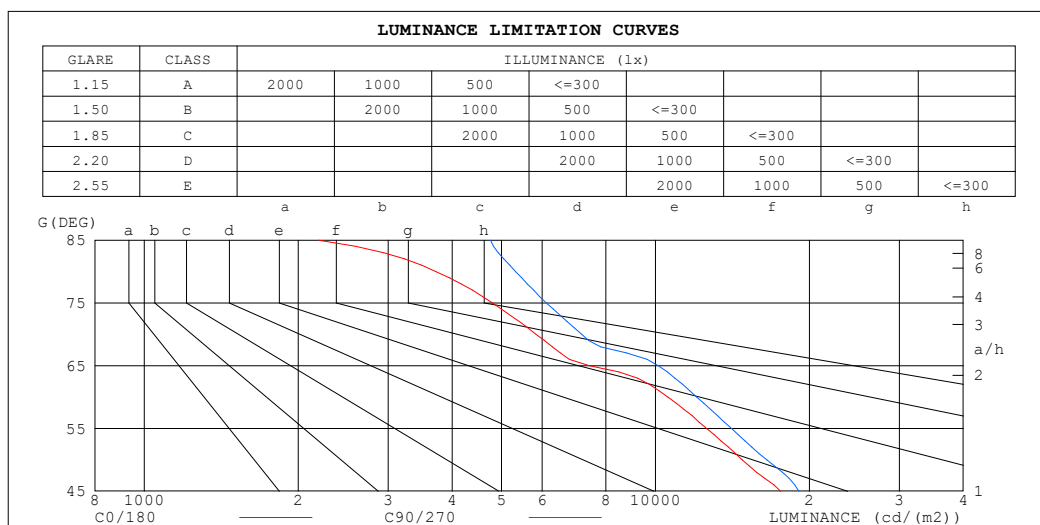


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: Lihong yun
Test Date: 2023-03-15

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity: 65.0%
Test Distance: 7.580m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.52V I:0.0724A P:15.568W PF:0.9754 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1243.01x1 lm		
NAME: DL3717 3000K RA90 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 72	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

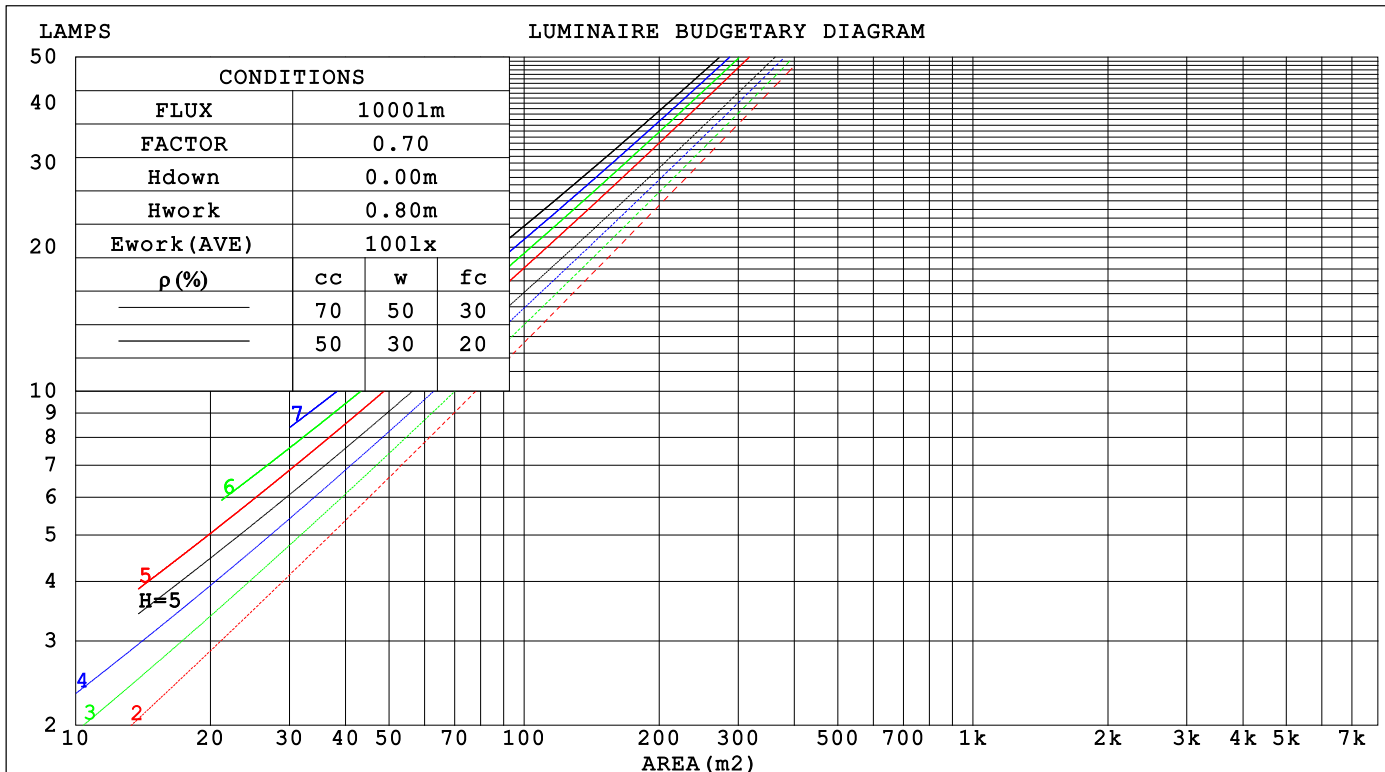

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Lihong yun
Test Date:2023-03-15

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:7.580m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:220.52V I:0.0724A P:15.568W PF:0.9754 Freq:49.99Hz			UTHDi:0.00% ITHDi:0.00% KDisp:0			Lamp Flux:1243.01x1 lm		
NAME: DL3717 3000K RA90 36D			TYPE:			WEIGHT:		
SPEC.:			DIM.:			SERIAL No.:		
MFR.: VJC Lighting			SUR.: 72			Shielding Angle:		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.182	.104	.033	.175	.100	.032	.162	.093	.030	.150	.087	.028	.139	.081	.026		
2.0	.174	.095	.029	.168	.093	.029	.157	.087	.027	.147	.082	.026	.138	.078	.025		
3.0	.165	.088	.026	.160	.086	.026	.151	.082	.025	.142	.078	.024	.134	.074	.023		
4.0	.157	.081	.024	.152	.080	.024	.144	.076	.023	.137	.073	.022	.130	.070	.021		
5.0	.149	.076	.022	.145	.074	.022	.138	.072	.021	.131	.069	.021	.125	.067	.020		
6.0	.142	.071	.020	.138	.070	.020	.132	.068	.020	.126	.066	.019	.121	.063	.019		
7.0	.135	.067	.019	.132	.066	.019	.126	.064	.018	.121	.062	.018	.116	.060	.018		
8.0	.129	.063	.018	.126	.062	.018	.121	.061	.017	.116	.059	.017	.112	.058	.017		
9.0	.123	.060	.017	.121	.059	.017	.116	.057	.016	.112	.056	.016	.108	.055	.016		
10.0	.118	.057	.016	.116	.056	.016	.112	.055	.015	.108	.054	.015	.104	.052	.015		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)										
0.0	.196	.196	.196	.168	.168	.168	.114	.114	.114	.066	.066	.066	.021	.021	.021		
1.0	.177	.163	.150	.152	.140	.129	.104	.096	.089	.060	.056	.052	.019	.018	.017		
2.0	.162	.138	.118	.139	.119	.102	.095	.082	.071	.055	.048	.042	.018	.015	.014		
3.0	.150	.119	.095	.129	.103	.082	.088	.071	.058	.051	.042	.034	.016	.014	.011		
4.0	.140	.105	.078	.120	.090	.068	.082	.063	.048	.048	.037	.028	.015	.012	.009		
5.0	.131	.093	.065	.113	.081	.057	.078	.056	.040	.045	.033	.024	.014	.011	.008		
6.0	.124	.084	.055	.106	.073	.048	.073	.051	.034	.043	.030	.020	.014	.010	.007		
7.0	.117	.076	.048	.101	.066	.042	.070	.046	.029	.040	.027	.018	.013	.009	.006		
8.0	.111	.070	.042	.096	.061	.036	.066	.043	.026	.039	.025	.015	.012	.008	.005		
9.0	.106	.065	.037	.091	.056	.032	.063	.040	.023	.037	.023	.014	.012	.008	.005		
10.0	.101	.060	.033	.087	.052	.029	.061	.037	.021	.035	.022	.012	.011	.007	.004		

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Lihong yun
Test Date:2023-03-15

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:7.580m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:220.52V I:0.0724A P:15.568W PF:0.9754 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1243.01x1 lm											
NAME: DL3717 3000K RA90 36D						TYPE:			WEIGHT:		
SPEC.:						DIM.:			SERIAL No.:		
MFR.: VJC Lighting						SUR.: 72			Shielding Angle:		
ceiling/cavity		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	2H	19.4	20.3	19.6	20.5	20.7	20.0	21.0	20.3	21.2	21.3
	3H	19.3	20.2	19.6	20.4	20.6	20.0	20.9	20.3	21.1	21.3
	4H	19.3	20.1	19.6	20.4	20.6	20.0	20.8	20.3	21.1	21.3
	6H	19.3	20.0	19.6	20.3	20.5	20.0	20.8	20.3	21.0	21.3
	8H	19.2	20.0	19.5	20.2	20.5	20.0	20.7	20.3	21.0	21.3
	12H	19.2	19.9	19.5	20.2	20.5	19.9	20.6	20.3	20.9	21.2
4H	2H	19.2	20.1	19.5	20.3	20.5	19.9	20.7	20.2	20.9	21.2
	3H	19.2	20.0	19.6	20.2	20.5	19.9	20.6	20.3	20.9	21.2
	4H	19.2	19.9	19.6	20.2	20.5	19.9	20.6	20.3	20.9	21.2
	6H	19.2	19.8	19.6	20.1	20.5	19.9	20.5	20.3	20.9	21.2
	8H	19.2	19.7	19.6	20.1	20.5	19.9	20.5	20.3	20.8	21.2
	12H	19.1	19.6	19.6	20.0	20.4	19.9	20.4	20.3	20.8	21.2
8H	4H	19.2	19.7	19.6	20.0	20.4	19.8	20.4	20.2	20.7	21.1
	6H	19.1	19.6	19.6	20.0	20.4	19.9	20.3	20.3	20.7	21.1
	8H	19.1	19.5	19.6	19.9	20.4	19.9	20.2	20.3	20.7	21.1
	12H	19.1	19.4	19.6	19.9	20.4	19.8	20.2	20.3	20.6	21.1
12H	4H	19.1	19.6	19.5	20.0	20.4	19.8	20.3	20.2	20.7	21.1
	6H	19.1	19.5	19.6	19.9	20.4	19.8	20.2	20.3	20.6	21.1
	8H	19.1	19.4	19.6	19.9	20.4	19.8	20.1	20.3	20.6	21.1
Variations with the observer position at spacings(CIE Pub.117):											
S = 1.0H		+ 3.4 / - 3.6					+ 3.7 / - 4.9				
1.5H		+ 5.6 / - 2.8					+ 6.2 / - 4.3				
2.0H		+ 1.1 / - 0.9					+ 1.1 / - 0.8				

CIE Pub.117, 1243 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 0.8)
Area: 0.004 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Lihong yun
Test Date:2023-03-15

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:7.580m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:220.52V I:0.0724A P:15.568W PF:0.9754 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1243.01x1 lm		
NAME: DL3717 3000K RA90 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 72	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	85	79	75	85	79	75	84	78	75	71
0.80	93	87	83	92	86	83	91	86	82	78
1.00	98	92	88	97	91	88	95	91	87	83
1.25	102	96	93	101	96	92	99	94	91	87
1.50	105	100	96	103	99	96	101	97	94	90
2.00	108	103	100	106	102	99	103	100	97	92
2.50	109	105	102	108	104	101	104	102	99	93
3.00	111	107	105	109	106	103	106	103	101	94
4.00	113	110	108	111	109	106	107	105	104	96
5.00	115	112	110	112	110	109	108	107	105	97
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3℃
Operators: Lihong yun
Test Date: 2023-03-15

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity: 65.0%
Test Distance: 7.580m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.52V I:0.0724A P:15.568W PF:0.9754 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1243.01x1 lm		
NAME: DL3717 3000K RA90 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 72	Shielding Angle:

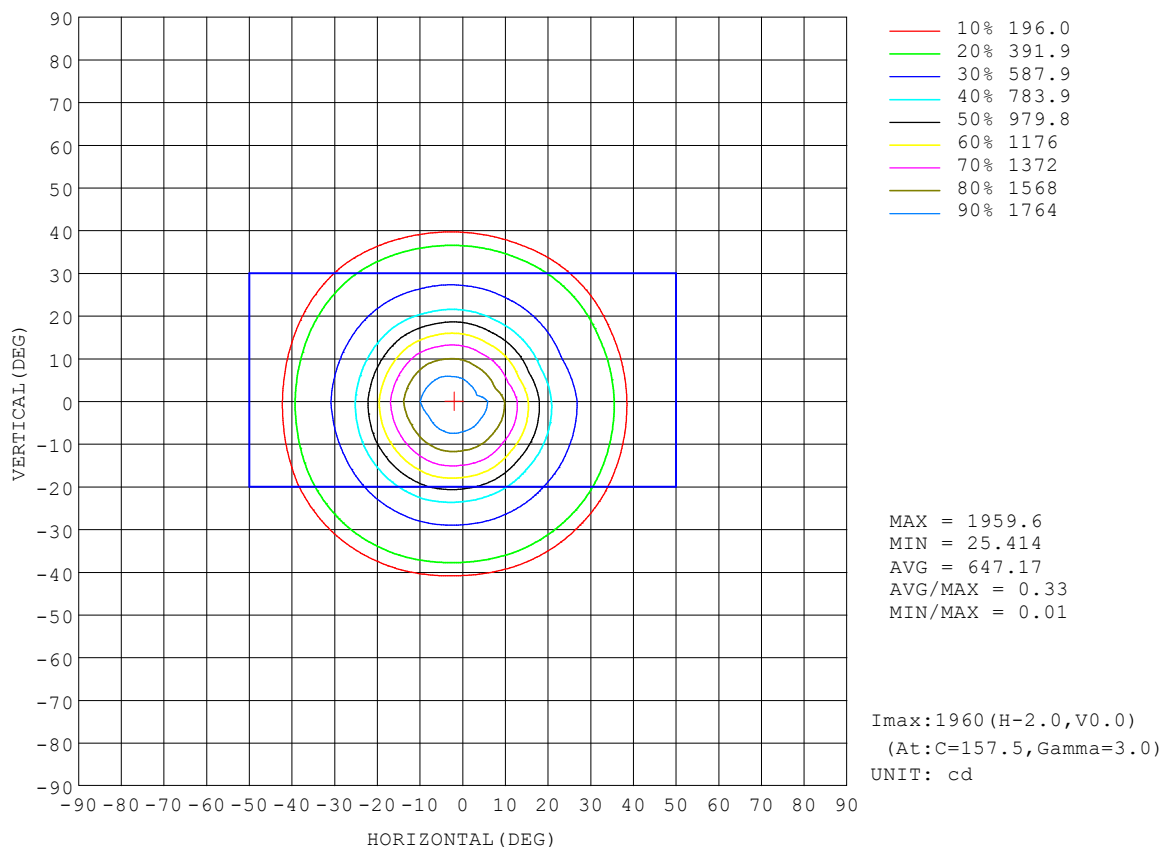


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Lihong yun
Test Date:2023-03-15

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:7.580m [K=1.0000]
Remarks:

AAI Figure

Test:U:220.52V I:0.0724A P:15.568W PF:0.9754 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1243.01x1 lm		
NAME: DL3717 3000K RA90 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 72	Shielding Angle:

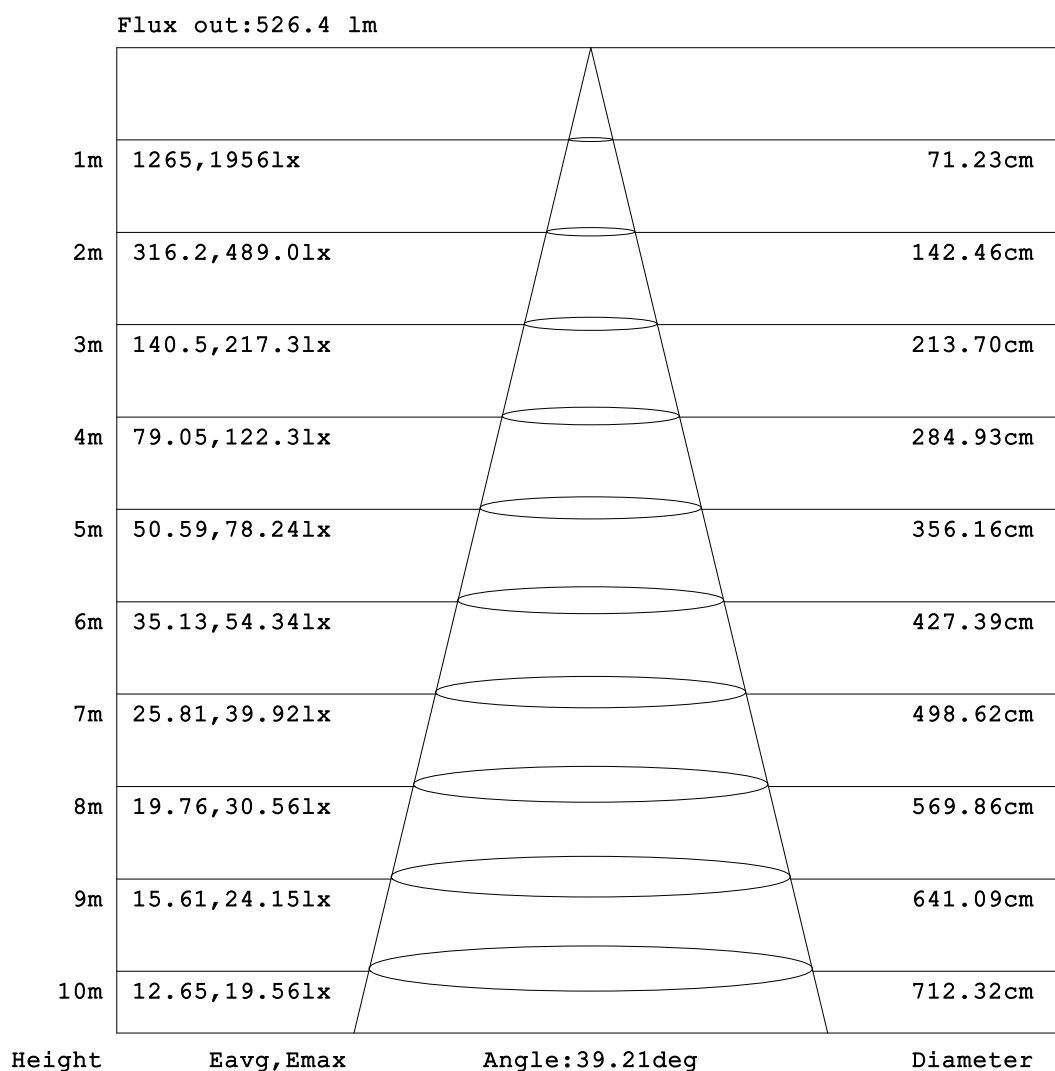


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Lihong yun
Test Date:2023-03-15

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:7.580m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:220.52V I:0.0724A P:15.568W PF:0.9754 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1243.01x1 lm		
NAME: DL3717 3000K RA90 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 72	Shielding Angle:

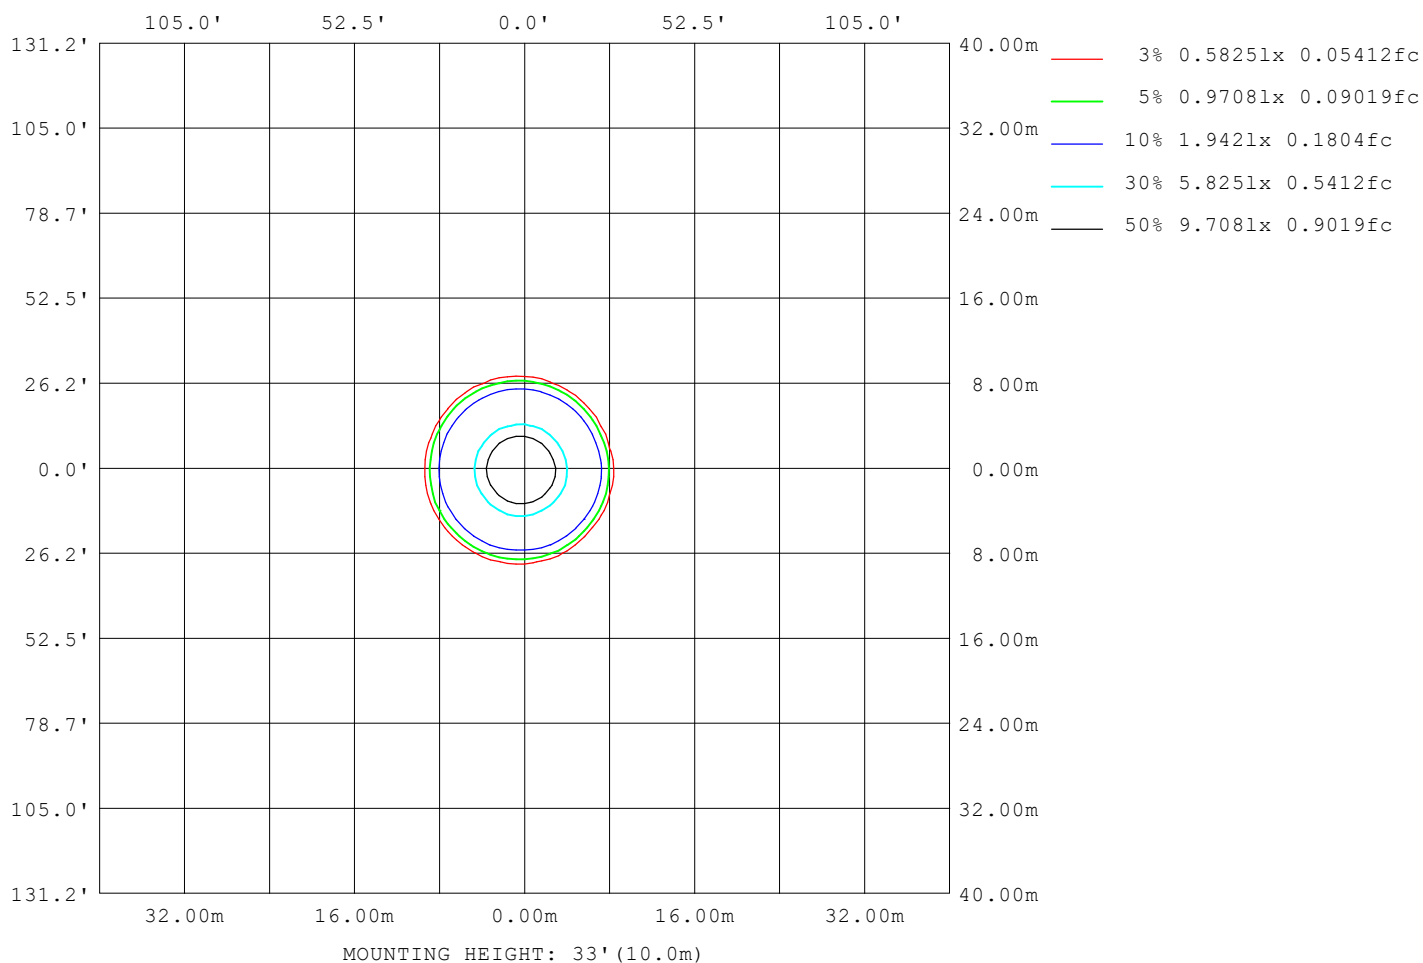

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: Lihong yun
Test Date: 2023-03-15

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity: 65.0%
Test Distance: 7.580m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:220.52V I:0.0724A P:15.568W PF:0.9754 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1243.01x1 lm		
NAME: DL3717 3000K RA90 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 72	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	9503
L_0~180 (75) av	5557
L_0~180 (85) av	3802
L_90~270 (65) av	9433
L_90~270 (75) av	5553
L_90~270 (85) av	3809
L_45 (65) av	9471
L_45 (75) av	5568
L_45 (85) av	3819

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Lihong yun
Test Date:2023-03-15

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:7.580m [K=1.0000]
Remarks:

Planar Illuminance Curve

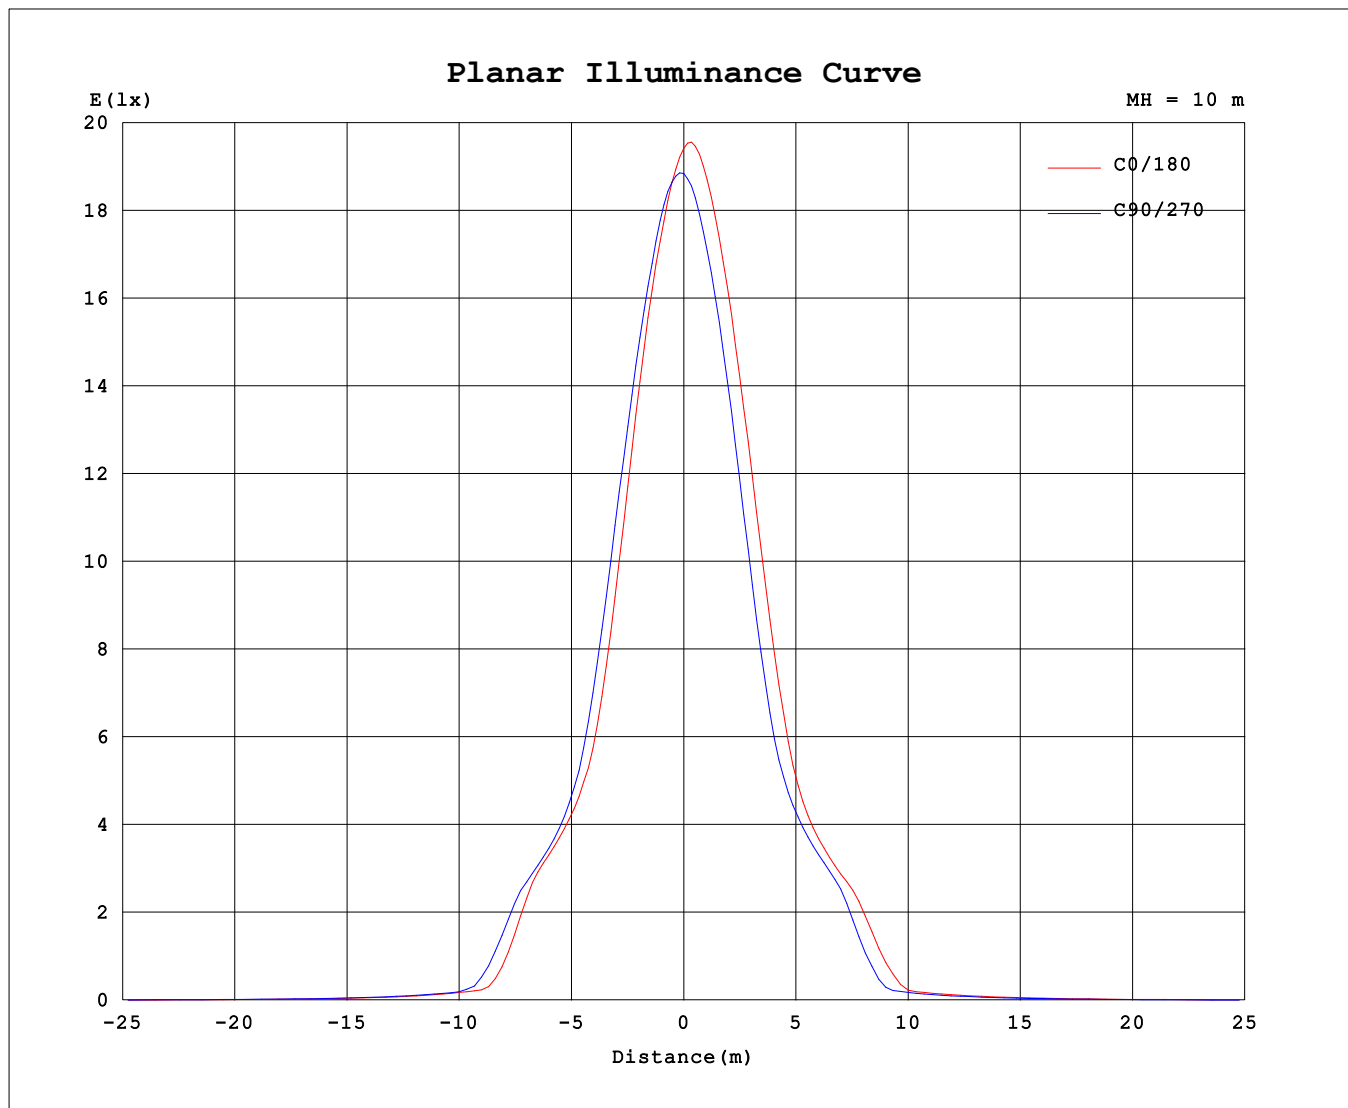

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3 °C
Operators: Lihong yun
Test Date: 2023-03-15

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity: 65.0%
Test Distance: 7.580m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.52V I:0.0724A P:15.568W PF:0.9754 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1243.01x1 lm																	
NAME: DL3717 3000K RA90 36D									TYPE:						WEIGHT:		
SPEC.:									DIM.:						SERIAL No.:		
MFR.: VJC Lighting									SUR.: 72						Shielding Angle:		

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	1894	1894	1894	1894	1894	1894	1894	1894	1894	1894	1894	1894	1894	1894	1894	1894			
5	1753	1770	1787	1819	1845	1875	1890	1896	1876	1865	1845	1809	1781	1753	1743	1741			
10	1518	1551	1576	1619	1655	1700	1726	1744	1719	1695	1663	1603	1558	1507	1493	1488			
15	1175	1220	1258	1333	1376	1442	1472	1496	1461	1423	1386	1298	1236	1170	1151	1138			
20	813	854	889	964	1023	1100	1132	1160	1115	1064	1018	932	875	816	795	784			
25	609	622	639	675	708	765	793	813	774	735	706	666	640	618	608	602			
30	527	533	540	556	570	588	598	604	590	579	570	556	544	532	526	522			
35	413	430	452	480	493	509	515	520	511	504	498	483	464	431	409	393			
40	106	130	146	202	251	308	335	363	338	314	281	219	172	124	104	91.4			
45	48.5	49.9	52.0	54.2	54.3	56.6	75.2	72.5	63.8	68.9	57.5	53.2	50.8	48.4	47.4	47.2			
50	37.1	37.8	39.2	41.6	42.7	44.7	46.2	47.4	46.3	45.2	43.4	40.4	38.3	36.8	36.1	36.2			
55	28.2	28.6	29.5	31.2	32.5	34.5	35.6	36.7	36.2	35.1	33.7	31.6	30.1	28.6	28.0	27.7			
60	20.6	21.0	21.7	23.1	24.2	26.0	26.9	27.9	27.5	26.5	25.7	24.1	22.9	21.4	20.7	20.2			
65	12.3	13.2	14.4	16.2	17.2	18.8	19.6	20.5	19.9	19.1	18.4	16.7	14.7	12.5	11.6	11.2			
70	7.80	8.17	8.54	9.26	9.87	10.5	10.8	10.9	10.3	9.84	9.44	8.73	8.19	7.67	7.47	7.40			
75	4.85	5.11	5.41	5.93	6.37	6.84	7.01	7.12	6.66	6.38	6.07	5.54	5.13	4.75	4.57	4.53			
80	2.52	2.74	2.94	3.37	3.72	4.08	4.25	4.31	3.96	3.75	3.50	3.09	2.79	2.46	2.35	2.28			
85	0.75	0.90	1.06	1.39	1.67	1.98	2.10	2.18	1.90	1.72	1.53	1.22	0.99	0.75	0.64	0.58			
90	0.06	0.06	0.05	0.05	0.13	0.32	0.42	0.48	0.31	0.20	0.09	0.05	0.06	0.05	0.06	0.06			
95	0.06	0.08	0.05	0.07	0.05	0.07	0.05	0.06	0.07	0.06	0.07	0.05	0.08	0.06	0.09	0.06			
100	0.09	0.11	0.08	0.10	0.07	0.08	0.06	0.09	0.10	0.07	0.09	0.08	0.11	0.08	0.12	0.10			
105	0.12	0.14	0.11	0.13	0.10	0.12	0.09	0.11	0.14	0.11	0.14	0.13	0.17	0.17	0.21	0.20			
110	0.19	0.21	0.17	0.18	0.14	0.16	0.13	0.15	0.25	0.23	0.26	0.27	0.33	0.34	0.39	0.39			
115	0.35	0.35	0.31	0.30	0.25	0.25	0.21	0.23	0.44	0.43	0.47	0.49	0.56	0.59	0.64	0.65			
120	0.57	0.57	0.52	0.50	0.44	0.42	0.38	0.39	0.70	0.69	0.74	0.77	0.85	0.90	0.96	0.97			
125	0.84	0.84	0.78	0.75	0.69	0.66	0.61	0.62	1.03	1.03	1.09	1.15	1.25	1.32	1.40	1.42			
130	1.21	1.20	1.13	1.07	0.99	0.95	0.89	0.90	1.48	1.49	1.57	1.66	1.79	1.89	1.97	2.00			
135	1.69	1.66	1.58	1.50	1.40	1.33	1.27	1.28	2.06	2.09	2.18	2.29	2.44	2.55	2.65	2.68			
140	2.26	2.21	2.12	2.02	1.90	1.83	1.76	1.76	2.76	2.79	2.90	3.02	3.15	3.28	3.37	3.40			
145	2.89	2.84	2.73	2.62	2.50	2.40	2.33	2.33	3.49	3.51	3.62	3.74	3.90	4.01	4.09	4.13			
150	3.53	3.48	3.37	3.27	3.16	3.04	2.96	2.98	4.21	4.22	4.32	4.44	4.60	4.68	4.74	4.76			
155	4.10	4.08	3.98	3.91	3.80	3.69	3.60	3.62	4.84	4.84	4.94	5.03	5.16	5.19	5.22	5.22			
160	4.65	4.64	4.57	4.51	4.40	4.31	4.24	4.24	5.34	5.33	5.43	5.47	5.57	5.58	5.59	5.57			
165	5.11	5.11	5.07	5.08	4.98	4.92	4.86	4.87	5.77	5.74	5.81	5.80	5.86	5.82	5.81	5.79			
170	5.43	5.47	5.43	5.47	5.39	5.35	5.29	5.35	6.00	5.96	5.99	5.91	5.93	5.90	5.88	5.84			
175	5.72	5.79	5.77	5.77	5.64	5.66	5.65	5.67	6.02	6.02	6.07	5.95	5.95	5.93	5.94	5.85			
180	5.95	6.02	6.02	5.98	5.90	5.92	5.91	5.90	6.02	5.99	6.06	5.95	5.94	5.91	5.93	5.87			

C Range: 0 - 360DEG

C Interval: 22.5DEG

Test Speed: HIGH

Temperature:25.3℃

Operators:Lihong yun

Test Date:2023-03-15

γ Range: 0 - 180DEG

γ Interval: 1.0DEG

Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456

Humidity:65.0%

Test Distance:7.580m [K=1.0000]

Remarks: