


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:220.72V I:0.0742A P:8.7310W PF:0.5386 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:634.53x1 lm		
NAME: DL6007 3000K RA90 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC lighting	SUR.: 22*22	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 72.68 lm/W			
MODEL	DL6007 3000K RA90 36D	Imax(cd)	1647	S/MH(C0/180)	0.58
NOMINAL POWER(W)	8	LOR(%)	100.0	S/MH(C90/270)	0.61
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	634.53	η UP,DN(C0-180)	0.5,46.3
NOMINAL FLUX(lm)	634.53	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.5,52.7
LAMPS INSIDE	1	η up(%)	1.0	CIBSE SHR NOM	0.50
TEST VOLTAGE(V)	220	η down(%)	99.0	CIBSE SHR MAX	0.60

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

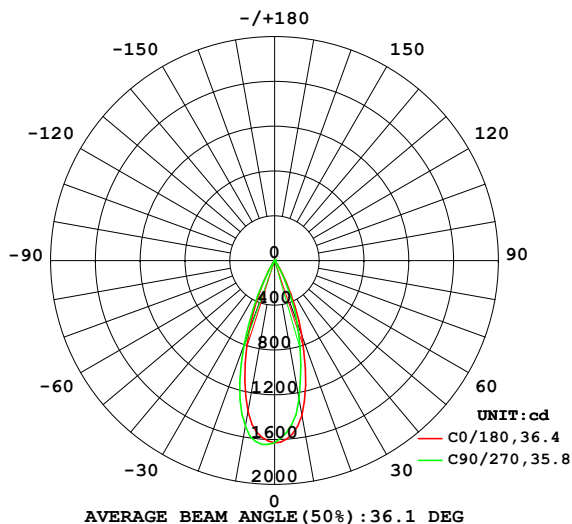

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

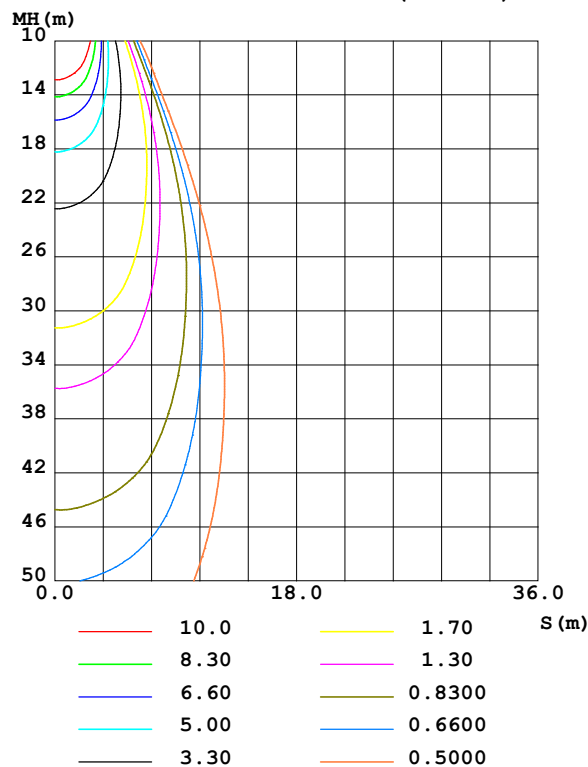

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:001
Test Date:2025-03-21

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:8.370m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1410	1326	1261	1286	1368	1468	1502	1498	0- 10	144.4	144.4	22.8,22.8
20	712.5	615.6	591.9	587.4	664.2	716.1	794.1	783.0	10- 20	285.8	430.2	67.8,67.8
30	137.7	131.2	111.0	107.1	114.6	132.6	136.9	142.0	20- 30	168.5	598.7	94.4,94.4
40	7.239	9.539	7.371	8.230	6.914	8.792	7.081	9.224	30- 40	27.29	626.0	98.7,98.7
50	0.4907	1.016	0.4302	0.9379	0.3637	0.8299	0.4007	0.8220	40- 50	2.080	628.1	99,99
60	0.2039	0.2102	0.2174	0.1906	0.1603	0.1601	0.1755	0.1763	50- 60	0.2793	628.4	99,99
70	0.0197	0.0609	0.0056	0.0394	0	0.0220	0	0.0418	60- 70	0.1320	628.5	99,99
80	0	0	0	0	0	0	0	0	70- 80	0.0037	628.5	99,99
90	0	0	0	0	0	0	0	0	80- 90	0	628.5	99,99
100	0	0	0	0	0	0	0	0	90-100	0	628.5	99,99
110	0	0	0	0	0	0	0	0	100-110	0.0000	628.5	99,99
120	0.1437	0.1626	0.1723	0.1648	0.1662	0.1495	0.1341	0.1320	110-120	0.0423	628.5	99.1,99.1
130	0.7899	0.8579	0.8935	0.8782	0.8003	0.7276	0.6699	0.6760	120-130	0.3752	628.9	99.1,99.1
140	1.920	2.045	2.108	2.057	1.945	1.816	1.713	1.721	130-140	1.006	629.9	99.3,99.3
150	3.157	3.261	3.335	3.275	3.244	3.126	3.020	2.989	140-150	1.590	631.5	99.5,99.5
160	3.721	3.726	3.790	3.764	3.890	3.892	3.854	3.764	150-160	1.643	633.1	99.8,99.8
170	3.409	3.423	3.423	3.512	3.566	3.665	3.634	3.565	160-170	1.054	634.2	99.9,99.9
180	3.273	3.406	3.350	3.405	3.322	3.428	3.381	3.417	170-180	0.3275	634.5	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 627.76 lm

%lum = 98.9%

%lamp = 98.9%

Conical surface Flux(130deg): 628.45 lm

%lum = 99.0%


%lamp = 99.0%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:001
 Test Date:2025-03-21

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:8.370m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:220.72V I:0.0742A P:8.7310W PF:0.5386 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:634.53x1 lm		
NAME: DL6007 3000K RA90 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC lighting	SUR.: 22*22	Shielding Angle:

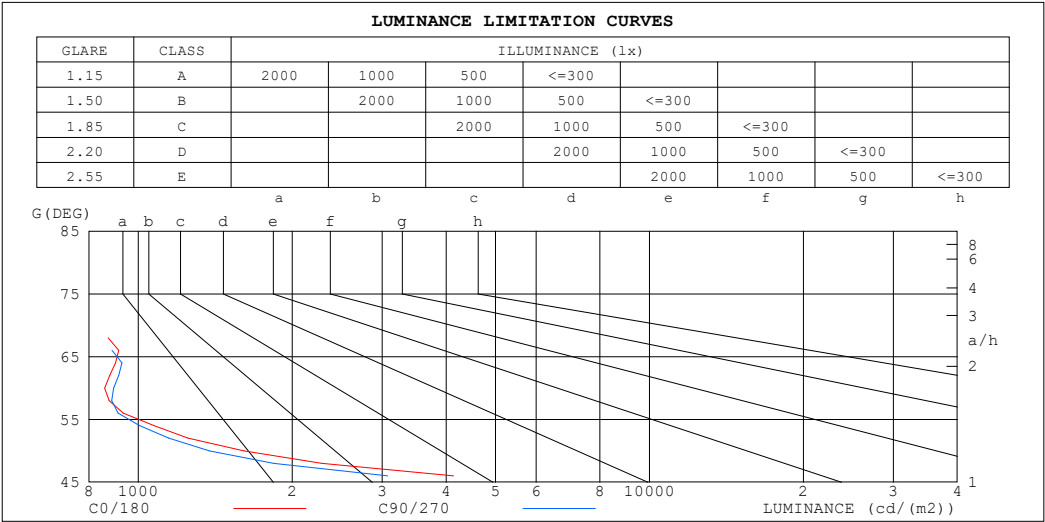

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	0	0
80	0	0
75	0	0
70	122	34
65	936	963
60	860	894
55	1100	1030
50	1609	1376
45	8117	6988


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:001
Test Date:2025-03-21

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:8.370m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.72V I:0.0742A P:8.7310W PF:0.5386 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:634.53x1 lm		
NAME: DL6007 3000K RA90 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC lighting	SUR.: 22*22	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.01	1.01	1.01	.99
1.0	1.12	1.10	1.08	1.10	1.08	1.06	1.06	1.04	1.03	1.02	1.01	.00	.98	.98	.97	.95
2.0	1.06	1.03	1.00	1.05	1.02	.99	1.01	.99	.97	.98	.96	.95	.95	.94	.93	.91
3.0	1.01	.97	.94	.00	.96	.93	.97	.94	.92	.95	.92	.90	.92	.90	.89	.87
4.0	.96	.92	.89	.95	.91	.88	.93	.90	.87	.91	.88	.86	.89	.87	.85	.84
5.0	.92	.88	.84	.91	.87	.84	.90	.86	.83	.88	.85	.82	.86	.84	.82	.80
6.0	.88	.84	.80	.88	.83	.80	.86	.82	.80	.85	.81	.79	.84	.81	.78	.77
7.0	.85	.80	.77	.84	.80	.77	.83	.79	.76	.82	.78	.76	.81	.78	.75	.74
8.0	.82	.77	.74	.81	.77	.74	.80	.76	.73	.79	.76	.73	.78	.75	.73	.72
9.0	.79	.74	.71	.78	.74	.71	.77	.73	.71	.76	.73	.70	.76	.72	.70	.69
10.0	.76	.71	.68	.75	.71	.68	.75	.71	.68	.74	.70	.68	.73	.70	.68	.67

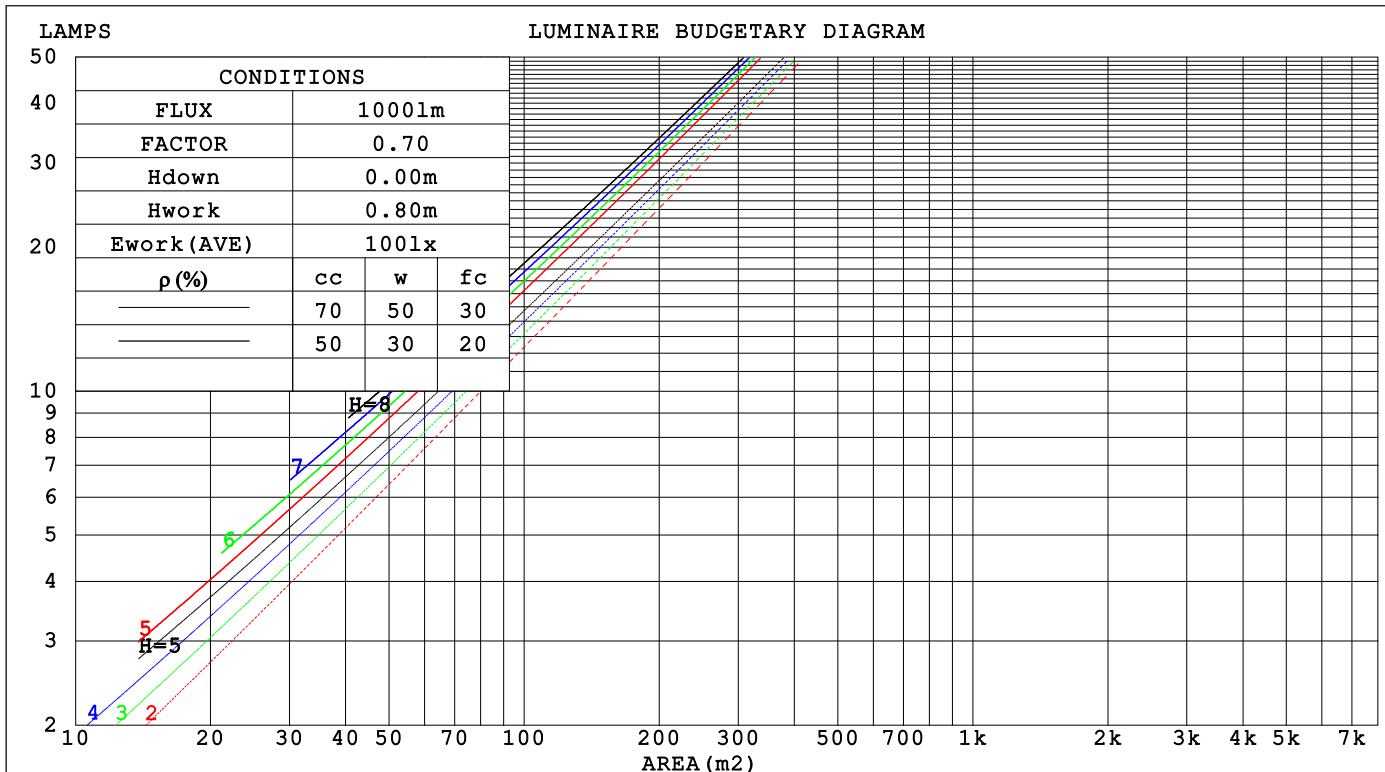

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:001
Test Date:2025-03-21

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:8.370m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:220.72V I:0.0742A P:8.7310W PF:0.5386 Freq:49.99Hz			UTHDi:0.00% ITHDi:0.00% KDisp:0			Lamp Flux:634.53x1 lm		
NAME: DL6007 3000K RA90 36D			TYPE:			WEIGHT:		
SPEC.:			DIM.:			SERIAL No.:		
MFR.: VJC lighting			SUR.: 22*22			Shielding Angle:		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.147	.084	.027	.140	.080	.025	.127	.073	.023	.116	.067	.021	.105	.061	.020		
2.0	.138	.075	.023	.132	.073	.022	.121	.067	.021	.111	.062	.020	.102	.058	.018		
3.0	.129	.069	.021	.124	.067	.020	.115	.063	.019	.107	.059	.018	.099	.055	.017		
4.0	.122	.063	.019	.118	.062	.018	.110	.058	.017	.103	.055	.017	.096	.052	.016		
5.0	.116	.059	.017	.112	.058	.017	.105	.055	.016	.099	.052	.016	.093	.050	.015		
6.0	.110	.055	.016	.107	.054	.016	.101	.052	.015	.096	.050	.015	.091	.048	.014		
7.0	.105	.052	.015	.102	.051	.015	.097	.049	.014	.092	.047	.014	.088	.046	.013		
8.0	.101	.049	.014	.098	.048	.014	.094	.047	.013	.089	.045	.013	.085	.044	.013		
9.0	.096	.047	.013	.094	.046	.013	.090	.045	.013	.086	.043	.012	.083	.042	.012		
10.0	.093	.044	.012	.091	.044	.012	.087	.043	.012	.084	.042	.012	.080	.040	.012		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.198	.198	.198	.169	.169	.169	.115	.115	.115	.066	.066	.066	.021	.021	.021	
1.0	.176	.165	.155	.151	.142	.133	.103	.097	.092	.059	.056	.053	.019	.018	.017	
2.0	.159	.140	.124	.136	.121	.107	.093	.083	.075	.054	.049	.044	.017	.016	.014	
3.0	.145	.121	.102	.124	.104	.088	.085	.072	.062	.049	.042	.036	.016	.014	.012	
4.0	.133	.106	.085	.114	.091	.074	.078	.064	.052	.045	.037	.031	.015	.012	.010	
5.0	.123	.093	.072	.106	.081	.062	.073	.057	.044	.042	.033	.026	.014	.011	.009	
6.0	.115	.084	.062	.099	.073	.054	.068	.051	.038	.039	.030	.023	.013	.010	.007	
7.0	.108	.076	.053	.092	.066	.047	.064	.046	.033	.037	.027	.020	.012	.009	.007	
8.0	.101	.069	.047	.087	.060	.041	.060	.042	.029	.035	.025	.017	.011	.008	.006	
9.0	.096	.064	.042	.083	.055	.037	.057	.039	.026	.033	.023	.015	.011	.008	.005	
10.0	.091	.059	.038	.079	.051	.033	.055	.036	.023	.032	.021	.014	.010	.007	.005	

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:001
Test Date:2025-03-21

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:8.370m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:220.72V I:0.0742A P:8.7310W PF:0.5386 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:634.53x1 lm										
NAME: DL6007 3000K RA90 36D						TYPE:		WEIGHT:		
SPEC.:						DIM.:		SERIAL No.:		
MFR.: VJC lighting						SUR.: 22*22		Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	15.2	16.0	15.5	16.1	16.3	14.1	14.8	14.3	15.0	15.2
3H	15.1	15.8	15.3	16.0	16.2	14.0	14.6	14.2	14.8	15.0
4H	15.0	15.6	15.3	15.9	16.1	13.9	14.5	14.2	14.7	15.0
6H	14.9	15.5	15.2	15.8	16.0	13.8	14.4	14.1	14.6	14.9
8H	14.9	15.4	15.2	15.7	16.0	13.7	14.3	14.1	14.6	14.9
12H	14.8	15.4	15.1	15.7	15.9	13.7	14.3	14.0	14.5	14.8
4H 2H	15.0	15.6	15.3	15.9	16.1	13.9	14.5	14.2	14.7	15.0
3H	14.8	15.4	15.1	15.7	15.9	13.7	14.3	14.0	14.5	14.8
4H	14.7	15.2	15.1	15.5	15.9	13.6	14.1	14.0	14.4	14.7
6H	14.6	15.1	15.0	15.4	15.8	13.5	13.9	13.9	14.3	14.7
8H	14.6	15.0	15.0	15.3	15.7	13.4	13.9	13.8	14.2	14.6
12H	14.5	14.9	14.9	15.3	15.7	13.4	13.8	13.8	14.2	14.6
8H 4H	14.6	15.0	15.0	15.3	15.7	13.4	13.9	13.8	14.2	14.6
6H	14.5	14.8	14.9	15.2	15.6	13.3	13.7	13.8	14.1	14.5
8H	14.4	14.7	14.9	15.1	15.6	13.3	13.6	13.7	14.0	14.5
12H	14.3	14.6	14.8	15.0	15.5	13.2	13.5	13.7	13.9	14.4
12H 4H	14.5	14.9	14.9	15.3	15.7	13.4	13.8	13.8	14.2	14.6
6H	14.4	14.7	14.9	15.1	15.6	13.3	13.6	13.7	14.0	14.5
8H	14.3	14.6	14.8	15.0	15.5	13.2	13.5	13.7	13.9	14.4
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 4.5 / -16.5					+ 4.0 / -16.0				
1.5H	+ 7.1 / -13.9					+ 6.7 / -13.7				
2.0H	+ 6.6 / - 5.1					+ 6.5 / - 4.2				

CIE Pub.117, 634.5 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -1.6)
Area: 0.000484 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:001
Test Date:2025-03-21

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:8.370m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:220.72V I:0.0742A P:8.7310W PF:0.5386 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:634.53x1 lm		
NAME: DL6007 3000K RA90 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC lighting	SUR.: 22*22	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	91	85	82	90	85	82	89	84	81	78
0.80	98	93	89	97	92	89	96	92	89	85
1.00	101	96	93	101	96	93	99	96	92	89
1.25	105	100	97	104	100	97	102	98	96	92
1.50	107	103	100	106	102	100	104	101	98	94
2.00	110	106	103	108	105	102	105	103	100	95
2.50	111	108	105	109	106	104	106	104	102	96
3.00	112	109	107	111	108	106	107	105	103	97
4.00	114	112	110	112	110	108	108	107	105	98
5.00	115	113	112	113	112	110	109	108	107	99
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3℃
Operators: 001
Test Date: 2025-03-21

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity: 65.0%
Test Distance: 8.370m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.72V I:0.0742A P:8.7310W PF:0.5386 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:634.53x1 lm		
NAME: DL6007 3000K RA90 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC lighting	SUR.: 22*22	Shielding Angle:

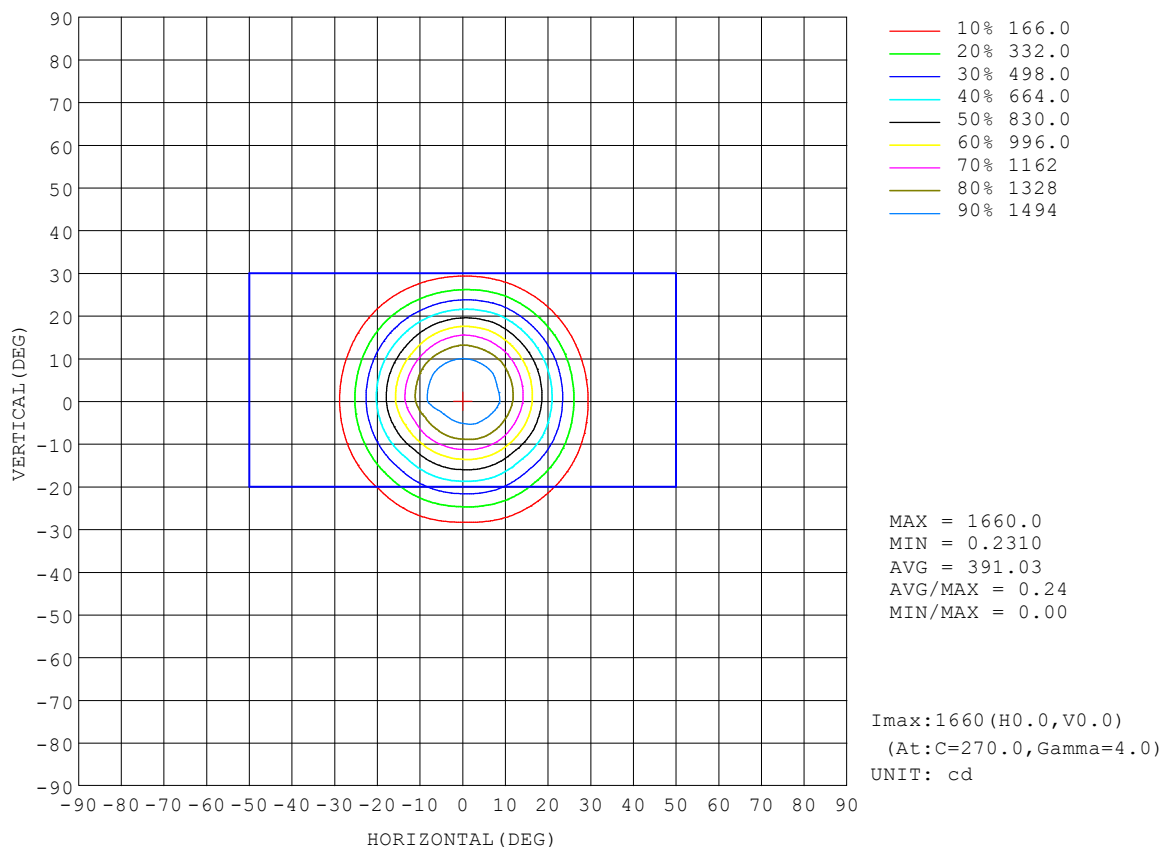


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:001
Test Date:2025-03-21

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:8.370m [K=1.0000]
Remarks:

AAI Figure

Test:U:220.72V I:0.0742A P:8.7310W PF:0.5386 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:634.53x1 lm		
NAME: DL6007 3000K RA90 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC lighting	SUR.: 22*22	Shielding Angle:

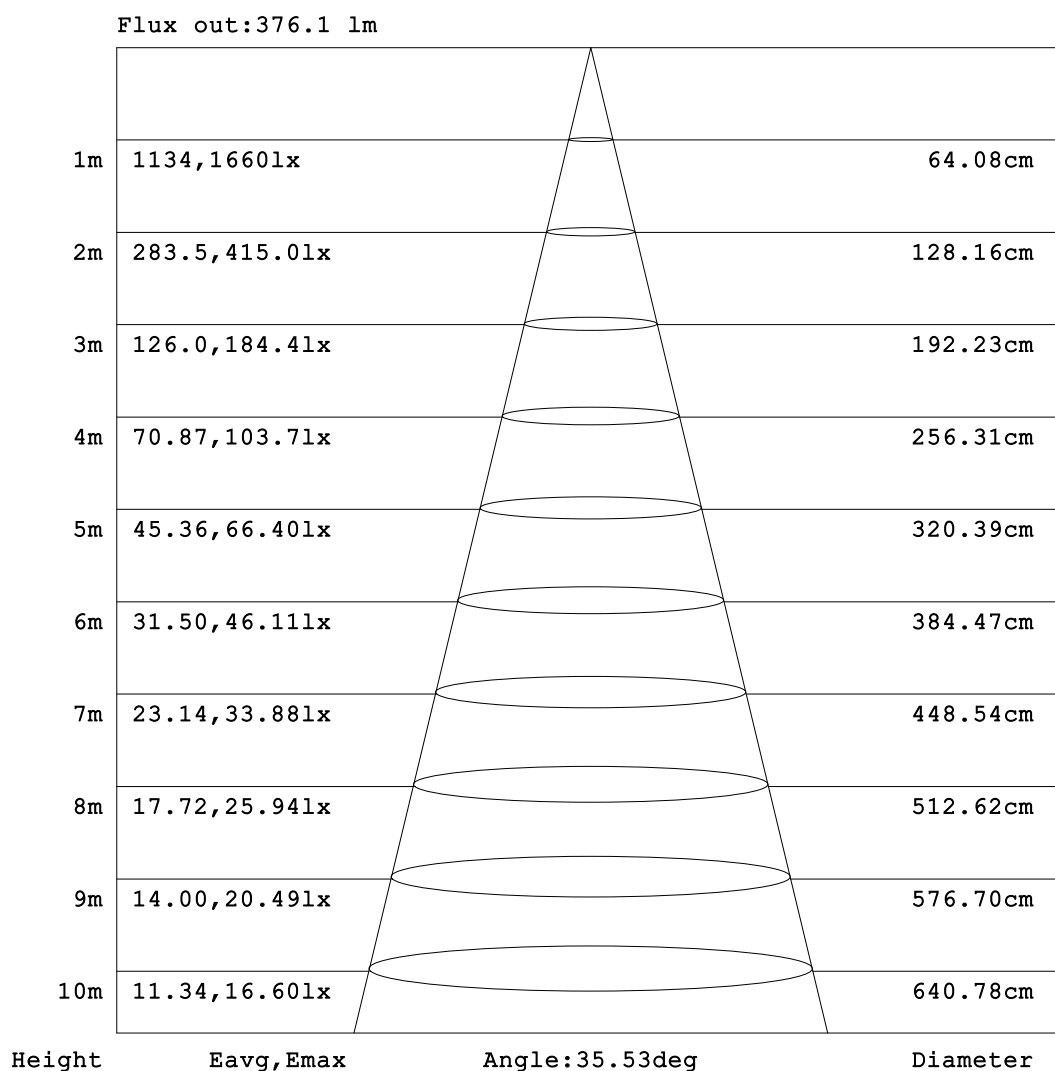


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: 001
Test Date: 2025-03-21

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity: 65.0%
Test Distance: 8.370m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:220.72V I:0.0742A P:8.7310W PF:0.5386 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:634.53x1 lm		
NAME: DL6007 3000K RA90 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC lighting	SUR.: 22*22	Shielding Angle:

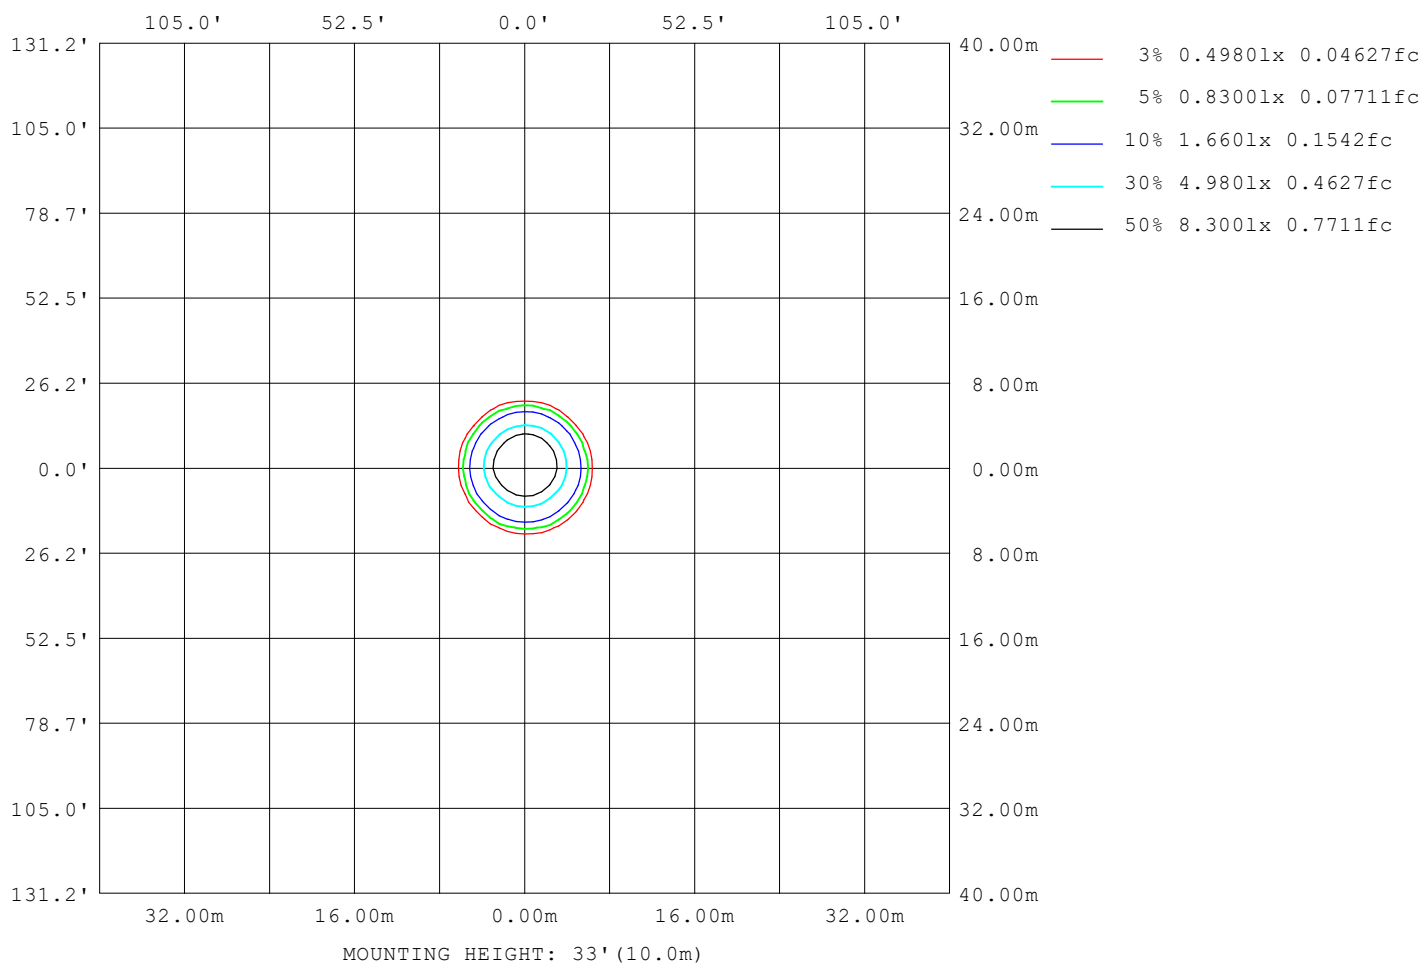

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: 001
Test Date: 2025-03-21

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity: 65.0%
Test Distance: 8.370m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:220.72V I:0.0742A P:8.7310W PF:0.5386 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:634.53x1 lm		
NAME: DL6007 3000K RA90 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC lighting	SUR.: 22*22	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	804
L_0~180 (75) av	0
L_0~180 (85) av	0
L_90~270 (65) av	857
L_90~270 (75) av	0
L_90~270 (85) av	0
L_45 (65) av	581
L_45 (75) av	0
L_45 (85) av	0

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:001
Test Date:2025-03-21

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:8.370m [K=1.0000]
Remarks:

Planar Illuminance Curve

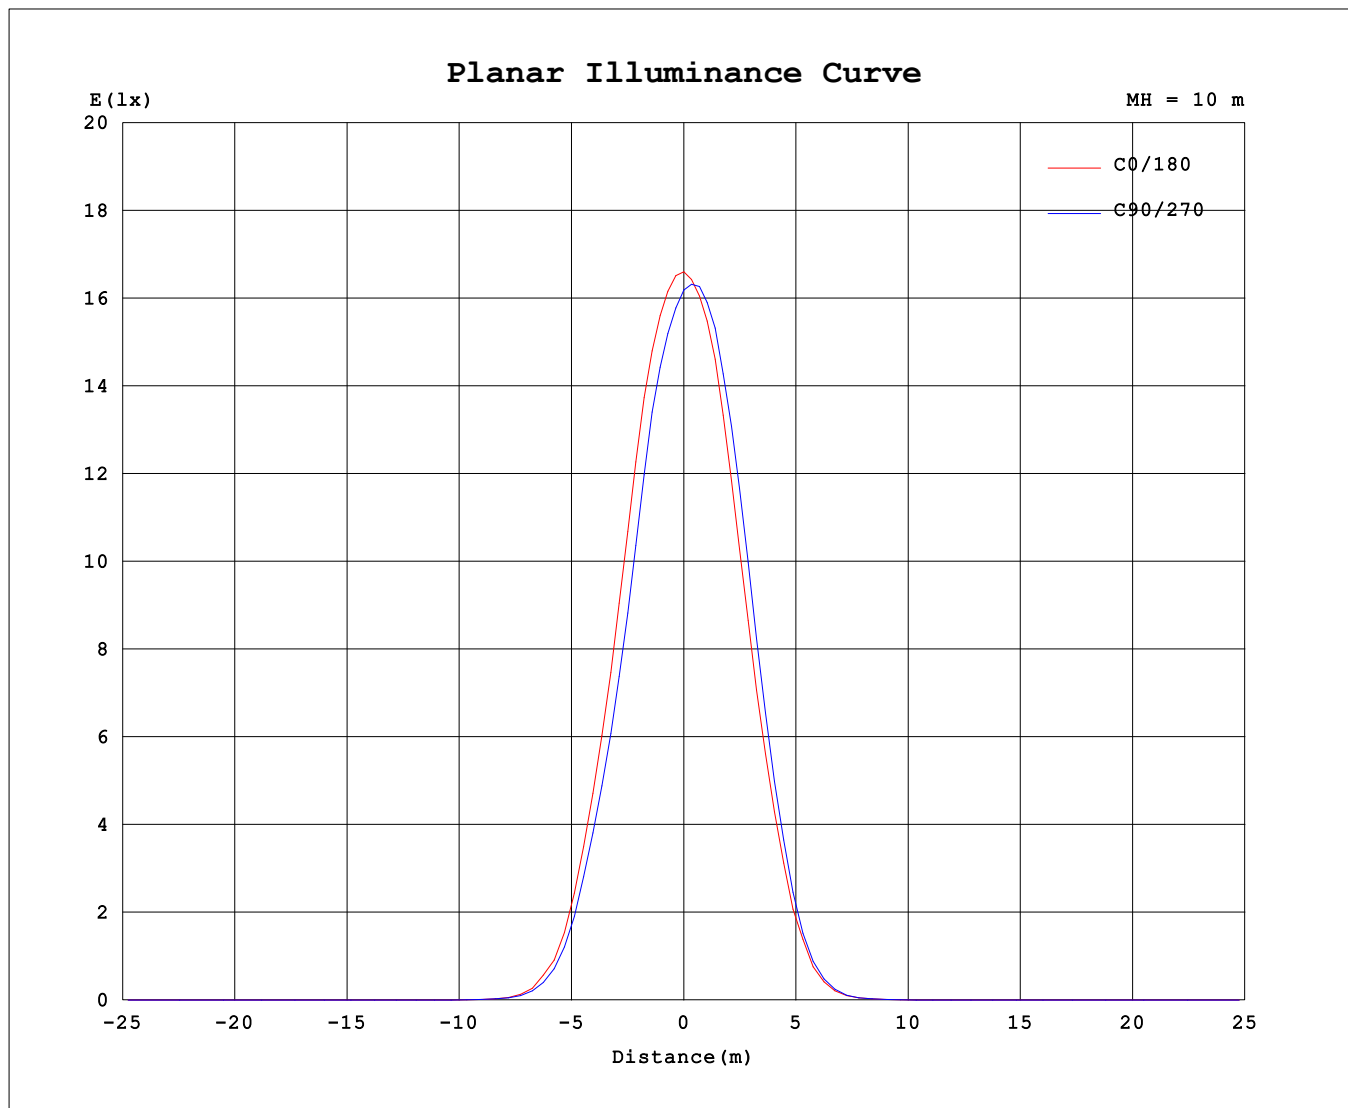

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3 °C
Operators: 001
Test Date: 2025-03-21

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity: 65.0%
Test Distance: 8.370m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.72V I:0.0742A P:8.7310W PF:0.5386 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:634.53x1 lm		
NAME: DL6007 3000K RA90 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC lighting	SUR.: 22*22	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	1627	1627	1627	1627	1627	1627	1627	1627	1627	1627	1627	1627	1627	1627	1627	1627			
5	1596	1576	1559	1548	1538	1538	1543	1561	1585	1606	1623	1637	1647	1642	1635	1618			
10	1410	1362	1326	1299	1261	1270	1286	1320	1368	1415	1468	1486	1502	1498	1498	1466			
15	1146	1090	1044	1000	971	968	987	1043	1103	1142	1185	1239	1284	1275	1266	1225			
20	712	678	616	613	592	594	587	639	664	694	716	759	794	815	783	766			
25	451	435	397	393	372	370	361	387	402	420	442	456	482	506	491	485			
30	138	141	131	129	111	111	107	113	115	123	133	135	137	143	142	141			
35	47.6	50.5	47.9	45.8	37.5	38.9	38.0	37.9	37.2	42.1	46.7	47.3	44.3	44.6	47.9	46.4			
40	7.24	7.68	9.54	7.79	7.37	7.36	8.23	6.76	6.91	6.90	8.79	6.89	7.08	6.38	9.22	6.82			
45	2.72	3.08	3.15	3.20	2.40	3.08	3.03	2.73	2.17	2.77	2.73	2.72	2.49	2.63	2.65	2.58			
50	0.49	0.59	1.02	0.55	0.43	0.47	0.94	0.44	0.36	0.49	0.83	0.52	0.40	0.53	0.82	0.59			
55	0.30	0.29	0.48	0.28	0.29	0.27	0.39	0.24	0.22	0.27	0.40	0.29	0.25	0.30	0.44	0.31			
60	0.20	0.17	0.21	0.18	0.22	0.18	0.19	0.15	0.16	0.19	0.16	0.20	0.18	0.20	0.18	0.20			
65	0.19	0.15	0.15	0.16	0.20	0.15	0.14	0.13	0.15	0.17	0.11	0.17	0.16	0.18	0.13	0.17			
70	0.02	0.00	0.06	0.00	0.01	0.00	0.04	0.00	0.00	0.02	0.02	0.02	0.00	0.03	0.04	0.12			
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.00	0.01	0.00	0.00			
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
115	0.00	0.03	0.00	0.03	0.00	0.03	0.00	0.03	0.02	0.00	0.02	0.00	0.01	0.00	0.01	0.00			
120	0.14	0.18	0.16	0.19	0.17	0.20	0.16	0.19	0.17	0.13	0.15	0.11	0.13	0.10	0.13	0.11			
125	0.33	0.37	0.37	0.40	0.39	0.41	0.38	0.39	0.35	0.31	0.32	0.28	0.29	0.26	0.29	0.27			
130	0.79	0.85	0.86	0.90	0.89	0.92	0.88	0.86	0.80	0.74	0.73	0.67	0.67	0.64	0.68	0.68			
135	1.19	1.26	1.29	1.34	1.34	1.35	1.30	1.27	1.20	1.13	1.10	1.04	1.02	1.00	1.03	1.05			
140	1.92	2.00	2.05	2.10	2.11	2.11	2.06	2.02	1.95	1.86	1.82	1.74	1.71	1.69	1.72	1.75			
145	2.44	2.52	2.56	2.63	2.64	2.64	2.57	2.54	2.48	2.39	2.34	2.27	2.24	2.21	2.24	2.26			
150	3.16	3.24	3.26	3.33	3.33	3.34	3.28	3.26	3.24	3.15	3.13	3.05	3.02	2.97	2.99	2.99			
155	3.51	3.58	3.57	3.65	3.66	3.67	3.61	3.61	3.63	3.55	3.56	3.49	3.47	3.40	3.41	3.38			
160	3.72	3.74	3.73	3.77	3.79	3.79	3.76	3.81	3.89	3.85	3.89	3.85	3.85	3.78	3.76	3.69			
165	3.69	3.66	3.67	3.68	3.71	3.69	3.73	3.75	3.84	3.86	3.87	3.89	3.87	3.82	3.75	3.71			
170	3.41	3.38	3.42	3.41	3.42	3.42	3.51	3.52	3.57	3.66	3.67	3.67	3.63	3.64	3.56	3.54			
175	3.27	3.28	3.32	3.31	3.29	3.32	3.41	3.42	3.41	3.52	3.54	3.50	3.44	3.48	3.46	3.42			
180	3.27	3.35	3.41	3.38	3.35	3.36	3.41	3.36	3.32	3.35	3.43	3.37	3.38	3.38	3.42	3.35			

C Range: 0 - 360DEG

C Interval: 22.5DEG

Test Speed: HIGH

Temperature:25.3℃

Operators:001

Test Date:2025-03-21

γ Range: 0 - 180DEG

γ Interval: 2.0DEG

Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456

Humidity:65.0%

Test Distance:8.370m [K=1.0000]

Remarks: