


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:220.63V I:0.1018A P:20.409W PF:0.9085 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1878.49x1 lm		
NAME: LMDL3540 4000K RA90 60D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 84	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 92.04 lm/W			
MODELLMDL3540 4000K RA90 60D		Imax (cd)	2312	S/MH(C0/180)	0.84
NOMINAL POWER(W)	20	LOR(%)	100.0	S/MH(C90/270)	0.83
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	1878.5	η UP,DN(C0-180)	0.3,50.7
NOMINAL FLUX(lm)	1878.49	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.4,48.6
LAMPS INSIDE	1	η up (%)	0.7	CIBSE SHR NOM	0.75
TEST VOLTAGE(V)	220	η down (%)	99.3	CIBSE SHR MAX	0.90

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

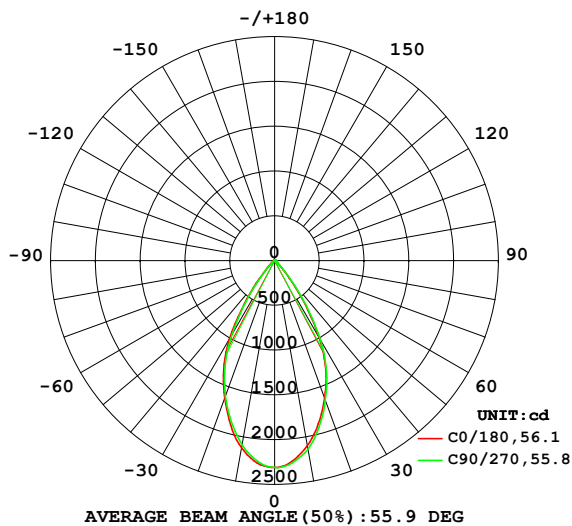

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

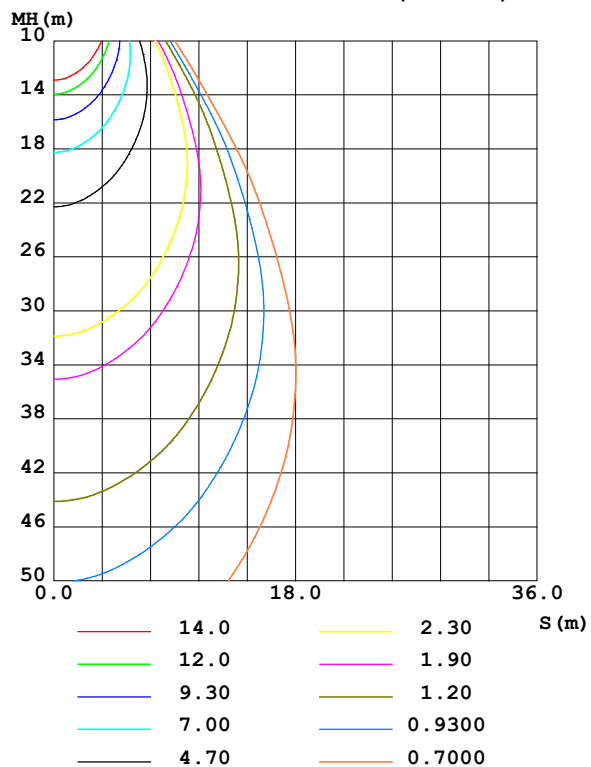

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:VJC008
Test Date:2023-07-18

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:7.580m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	2099	2125	2140	2130	2124	2107	2090	2091	0- 10	210.8	210.8	11.2,11.2
20	1636	1651	1658	1648	1631	1609	1609	1622	10- 20	527.2	738.0	39.3,39.3
30	1000	1036	1034	1024	1010	975.9	952.7	974.8	20- 30	610.1	1348	71.8,71.8
40	252.0	272.7	288.5	300.8	274.3	249.0	240.4	258.3	30- 40	373.2	1721	91.6,91.6
50	46.12	51.60	55.28	60.29	57.80	51.30	47.25	44.98	40- 50	94.63	1816	96.7,96.7
60	15.77	16.61	17.57	18.08	17.32	16.34	15.51	15.29	50- 60	25.74	1842	98,98
70	9.427	9.875	10.46	10.73	10.38	9.737	9.244	9.149	60- 70	12.86	1855	98.7,98.7
80	4.206	4.543	5.000	5.192	4.864	4.360	4.000	3.960	70- 80	7.500	1862	99.1,99.1
90	0.0830	0.1110	0.3399	0.3916	0.1365	0.0590	0.0661	0.0664	80- 90	2.408	1864	99.3,99.3
100	0.1170	0.1065	0.1071	0.1052	0.1216	0.1225	0.1301	0.1374	90-100	0.1009	1865	99.3,99.3
110	0.2361	0.2175	0.2118	0.2102	0.3763	0.3952	0.4178	0.4330	100-110	0.2050	1865	99.3,99.3
120	0.6877	0.6410	0.6239	0.6329	1.205	1.251	1.289	1.296	110-120	0.5766	1865	99.3,99.3
130	1.751	1.683	1.649	1.668	2.725	2.782	2.838	2.826	120-130	1.374	1867	99.4,99.4
140	3.373	3.288	3.251	3.281	4.748	4.810	4.861	4.830	130-140	2.394	1869	99.5,99.5
150	5.151	5.075	5.077	5.089	6.768	6.823	6.850	6.788	140-150	3.128	1872	99.7,99.7
160	6.675	6.613	6.696	6.647	8.239	8.262	8.350	8.196	150-160	3.094	1875	99.8,99.8
170	8.321	8.314	8.349	8.362	9.481	9.487	9.457	9.386	160-170	2.297	1878	100,100
180	9.752	9.830	9.728	9.790	9.815	9.857	9.764	9.808	170-180	0.8857	1878	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 1785.9 lm

%lum = 95.1%

%lamp = 95.1%

Conical surface Flux(130deg): 1848.8 lm

%lum = 98.4%


%lamp = 98.4%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:VJC008
 Test Date:2023-07-18

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:7.580m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:220.63V I:0.1018A P:20.409W PF:0.9085 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1878.49x1 lm		
NAME: LMDL3540 4000K RA90 60D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 84	Shielding Angle:

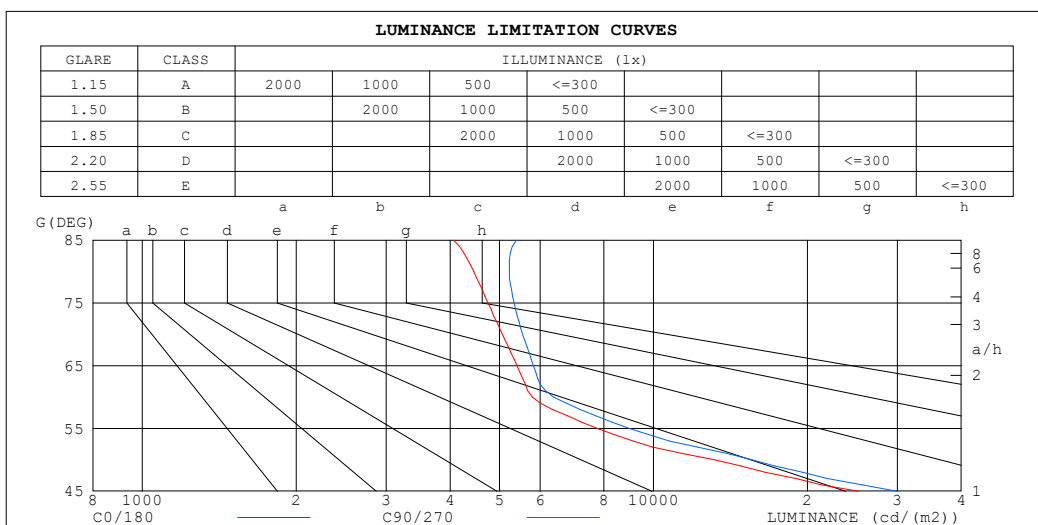


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3 °C
Operators: VJC008
Test Date: 2023-07-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity: 65.0%
Test Distance: 7.580m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.63V I:0.1018A P:20.409W PF:0.9085 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1878.49x1 lm		
NAME: LMDL3540 4000K RA90 60D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 84	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

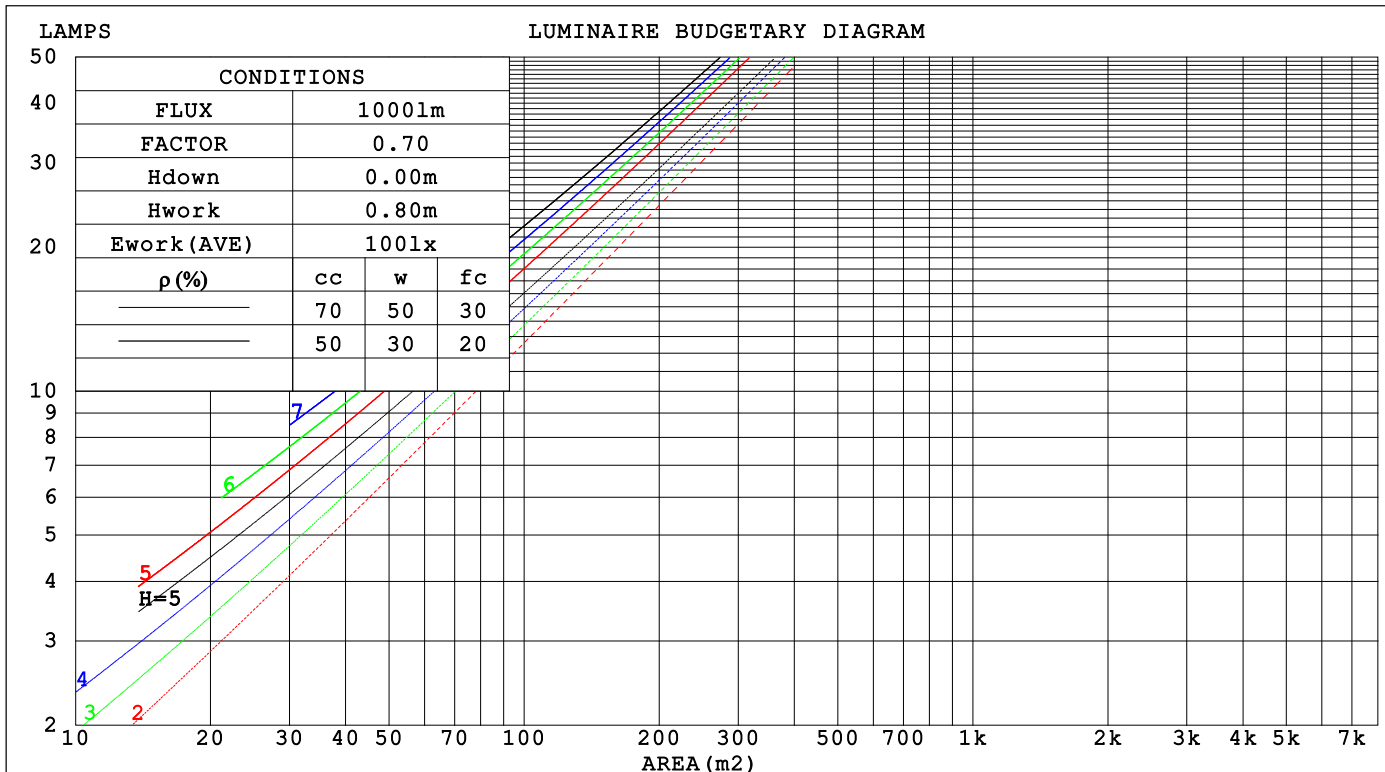

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:VJC008
Test Date:2023-07-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:7.580m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:220.63V I:0.1018A P:20.409W PF:0.9085 Freq:49.99Hz			UTHDi:0.00% ITHDi:0.00% KDisp:0			Lamp Flux:1878.49x1 lm		
NAME: LMDL3540 4000K RA90 60D			TYPE:			WEIGHT:		
SPEC.:			DIM.:			SERIAL No.:		
MFR.: VJC Lighting			SUR.: 84			Shielding Angle:		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.180	.103	.033	.173	.099	.031	.160	.092	.029	.148	.086	.027	.137	.080	.026		
2.0	.172	.094	.029	.166	.092	.028	.155	.086	.027	.145	.081	.025	.136	.077	.024		
3.0	.164	.087	.026	.159	.085	.026	.149	.081	.025	.140	.077	.024	.132	.073	.023		
4.0	.156	.081	.024	.151	.079	.023	.143	.076	.023	.136	.073	.022	.128	.070	.021		
5.0	.148	.075	.022	.144	.074	.022	.137	.071	.021	.131	.069	.020	.124	.066	.020		
6.0	.141	.071	.020	.138	.070	.020	.132	.067	.020	.126	.065	.019	.120	.063	.019		
7.0	.135	.067	.019	.132	.066	.019	.126	.064	.018	.121	.062	.018	.116	.060	.018		
8.0	.129	.063	.018	.126	.062	.018	.121	.061	.017	.117	.059	.017	.112	.058	.017		
9.0	.124	.060	.017	.121	.059	.017	.117	.058	.016	.112	.056	.016	.108	.055	.016		
10.0	.118	.057	.016	.116	.056	.016	.112	.055	.015	.108	.054	.015	.105	.053	.015		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)										
0.0	.196	.196	.196	.168	.168	.168	.114	.114	.114	.066	.066	.066	.021	.021	.021		
1.0	.177	.163	.150	.152	.140	.129	.104	.096	.089	.060	.056	.052	.019	.018	.017		
2.0	.162	.138	.118	.139	.119	.102	.095	.082	.071	.055	.048	.042	.018	.015	.014		
3.0	.150	.119	.095	.128	.103	.082	.088	.072	.058	.051	.042	.034	.016	.014	.011		
4.0	.140	.105	.078	.120	.091	.068	.082	.063	.048	.048	.037	.028	.015	.012	.009		
5.0	.131	.093	.065	.113	.081	.057	.077	.056	.040	.045	.033	.024	.014	.011	.008		
6.0	.124	.084	.055	.106	.073	.048	.073	.051	.034	.043	.030	.020	.014	.010	.007		
7.0	.117	.076	.048	.101	.066	.042	.070	.046	.030	.040	.027	.018	.013	.009	.006		
8.0	.111	.070	.042	.096	.061	.036	.066	.043	.026	.039	.025	.015	.012	.008	.005		
9.0	.106	.065	.037	.092	.056	.032	.064	.040	.023	.037	.023	.014	.012	.008	.005		
10.0	.102	.061	.033	.088	.053	.029	.061	.037	.021	.036	.022	.012	.012	.007	.004		

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:VJC008
Test Date:2023-07-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:7.580m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:220.63V I:0.1018A P:20.409W PF:0.9085 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1878.49x1 lm											
NAME: LMDL3540 4000K RA90 60D						TYPE:		WEIGHT:			
SPEC.:						DIM.:		SERIAL No.:			
MFR.: VJC Lighting						SUR.: 84		Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	Viewed crosswise					Viewed endwise					
x = 2H y = 2H	18.4	19.3	18.6	19.5	19.7	18.6	19.5	18.8	19.7	19.9	
	3H	18.3	19.2	18.5	19.4	19.6	18.5	19.4	18.8	19.6	19.8
	4H	18.2	19.1	18.5	19.3	19.5	18.5	19.3	18.7	19.5	19.8
	6H	18.2	19.0	18.5	19.2	19.5	18.4	19.2	18.7	19.4	19.7
	8H	18.2	18.9	18.5	19.2	19.4	18.4	19.1	18.7	19.4	19.7
	12H	18.1	18.8	18.5	19.1	19.4	18.4	19.1	18.7	19.4	19.6
4H 2H	18.2	19.0	18.4	19.2	19.5	18.4	19.2	18.7	19.4	19.7	
	3H	18.1	18.8	18.4	19.1	19.4	18.3	19.0	18.6	19.3	19.6
	4H	18.1	18.7	18.4	19.0	19.3	18.3	18.9	18.6	19.2	19.6
	6H	18.0	18.6	18.4	18.9	19.3	18.3	18.8	18.7	19.2	19.5
	8H	18.0	18.5	18.4	18.9	19.3	18.3	18.8	18.7	19.1	19.5
	12H	18.0	18.5	18.4	18.9	19.3	18.2	18.7	18.7	19.1	19.5
8H 4H	18.0	18.5	18.4	18.8	19.2	18.2	18.7	18.6	19.1	19.4	
	6H	18.0	18.4	18.4	18.8	19.2	18.2	18.6	18.6	19.0	19.5
	8H	18.0	18.3	18.4	18.8	19.2	18.2	18.6	18.7	19.0	19.5
	12H	17.9	18.3	18.4	18.7	19.2	18.2	18.5	18.7	19.0	19.5
12H 4H	17.9	18.4	18.3	18.8	19.2	18.1	18.6	18.6	19.0	19.4	
	6H	17.9	18.3	18.4	18.7	19.2	18.2	18.5	18.6	19.0	19.4
	8H	17.9	18.2	18.4	18.7	19.2	18.2	18.5	18.6	18.9	19.4
Variations with the observer position at spacings(CIE Pub.117):											
S = 1.0H	+ 3.2 / - 5.9					+ 3.2 / - 5.8					
1.5H	+ 5.5 / - 5.3					+ 5.4 / - 5.4					
2.0H	+ 3.8 / - 1.9					+ 4.3 / - 2.0					

CIE Pub.117, 1878 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 2.2)
Area: 0.0055 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:VJC008
Test Date:2023-07-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:7.580m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:220.63V I:0.1018A P:20.409W PF:0.9085 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1878.49x1 lm		
NAME: LMDL3540 4000K RA90 60D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 84	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	86	80	76	86	80	76	85	79	76	72
0.80	94	88	84	93	88	84	92	87	83	80
1.00	98	93	89	98	92	89	96	92	88	84
1.25	102	97	94	101	97	93	99	95	92	88
1.50	105	100	97	104	100	96	102	98	95	91
2.00	108	104	101	107	103	100	104	101	98	93
2.50	110	106	103	108	105	102	105	102	100	94
3.00	111	108	105	109	106	104	106	104	102	95
4.00	113	111	108	111	109	107	108	106	104	97
5.00	115	112	110	112	110	109	108	107	106	98
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators: VJC008
 Test Date: 2023-07-18

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.456
 Humidity: 65.0%
 Test Distance: 7.580m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:220.63V I:0.1018A P:20.409W PF:0.9085 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1878.49x1 lm		
NAME: LMDL3540 4000K RA90 60D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 84	Shielding Angle:

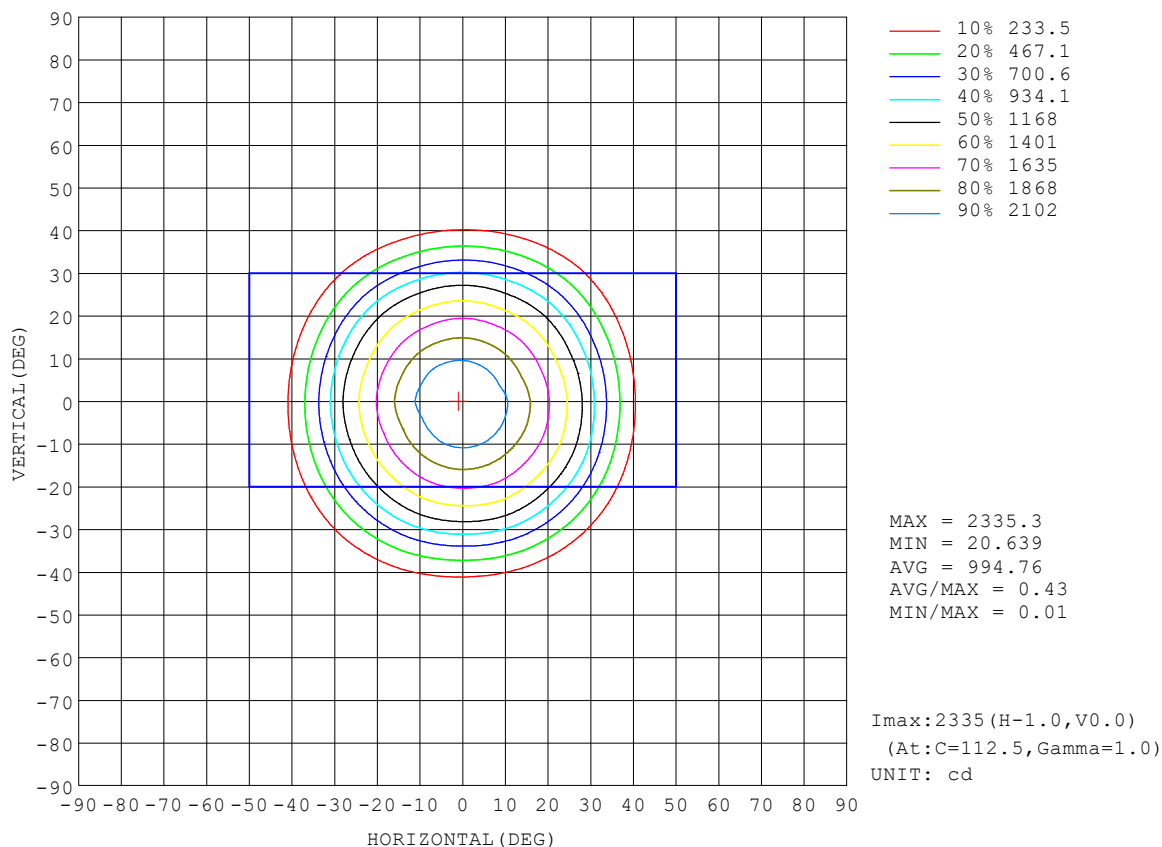


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:VJC008
Test Date:2023-07-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:7.580m [K=1.0000]
Remarks:

AAI Figure

Test:U:220.63V I:0.1018A P:20.409W PF:0.9085 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1878.49x1 lm		
NAME: LMDL3540 4000K RA90 60D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 84	Shielding Angle:

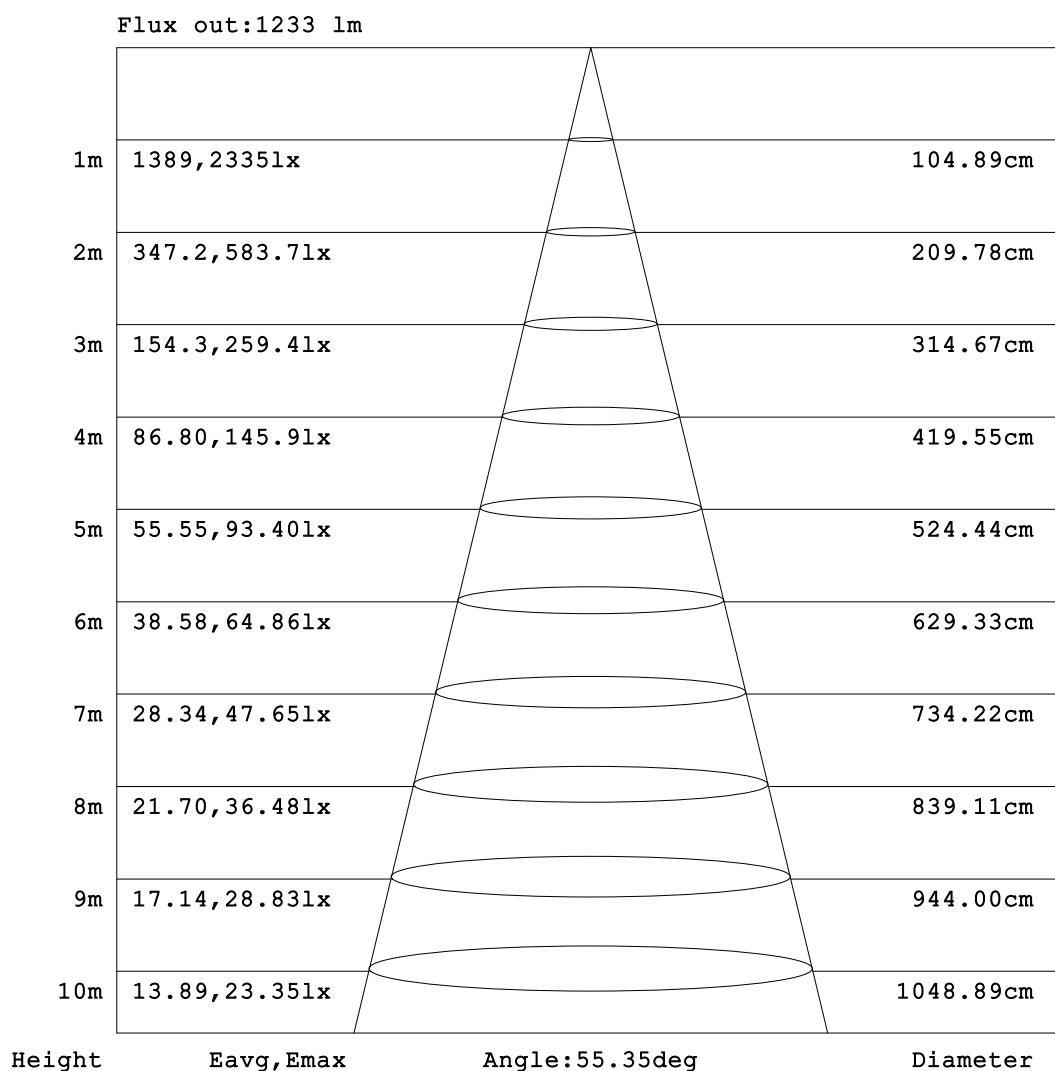


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: VJC008
Test Date: 2023-07-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity: 65.0%
Test Distance: 7.580m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:220.63V I:0.1018A P:20.409W PF:0.9085 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1878.49x1 lm		
NAME: LMDL3540 4000K RA90 60D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 84	Shielding Angle:

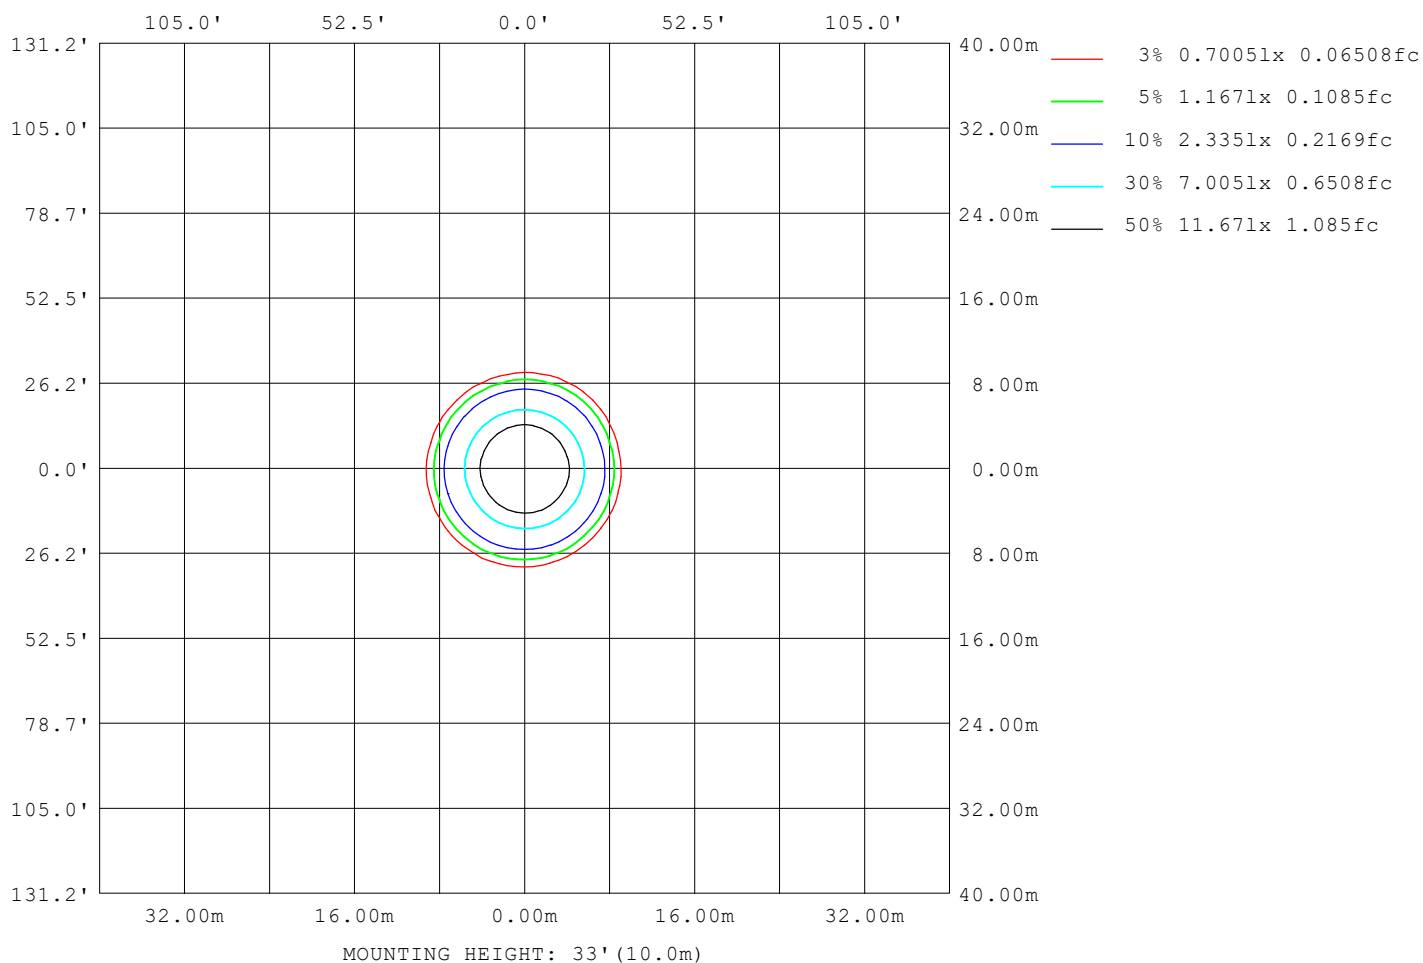

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3 °C
Operators: VJC008
Test Date: 2023-07-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity: 65.0%
Test Distance: 7.580m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:220.63V I:0.1018A P:20.409W PF:0.9085 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1878.49x1 lm		
NAME: LMDL3540 4000K RA90 60D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 84	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	5581
L_0~180 (75) av	4983
L_0~180 (85) av	4532
L_90~270 (65) av	5557
L_90~270 (75) av	4955
L_90~270 (85) av	4547
L_45 (65) av	5566
L_45 (75) av	4962
L_45 (85) av	4549

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:VJC008
Test Date:2023-07-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:7.580m [K=1.0000]
Remarks:

Planar Illuminance Curve

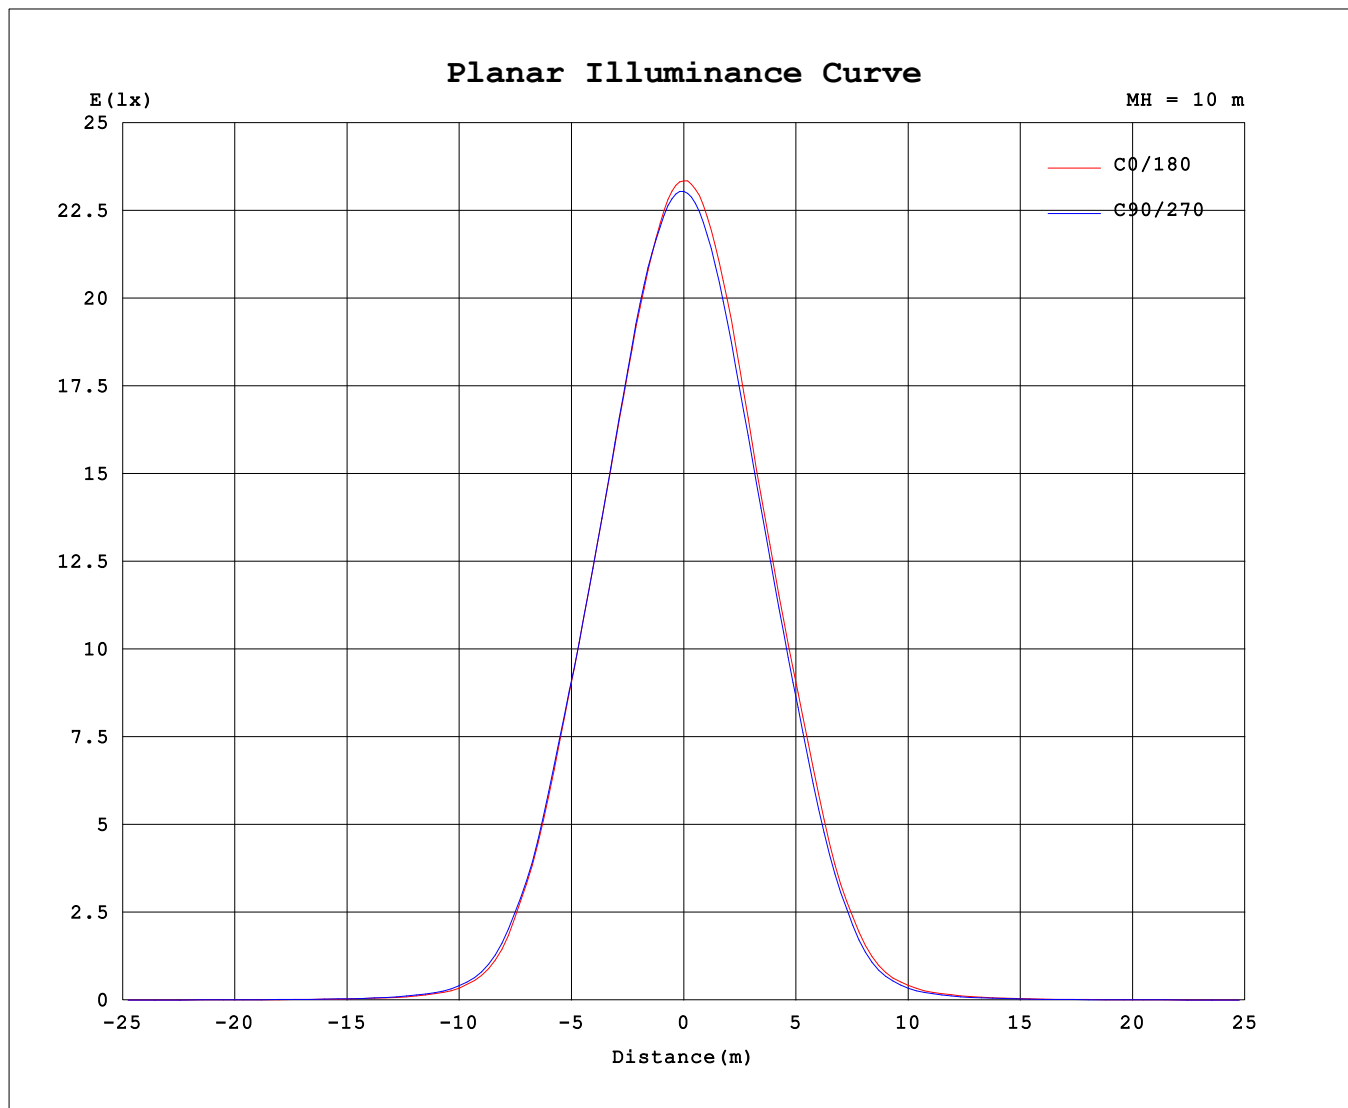

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3 °C
Operators: VJC008
Test Date: 2023-07-18

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity: 65.0%
Test Distance: 7.580m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.63V I:0.1018A P:20.409W PF:0.9085 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1878.49x1 lm																	
NAME: LMDL3540 4000K RA90 60D									TYPE:						WEIGHT:		
SPEC.:									DIM.:						SERIAL No.:		
MFR.: VJC Lighting									SUR.: 84						Shielding Angle:		

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	2310	2310	2310	2310	2310	2310	2310	2310	2310	2310	2310	2310	2310	2310	2310	2310			
5	2251	2259	2261	2268	2267	2272	2265	2267	2266	2261	2258	2248	2247	2241	2242	2246			
10	2099	2111	2125	2137	2140	2144	2130	2126	2124	2107	2107	2095	2090	2086	2091	2095			
15	1889	1904	1904	1916	1922	1918	1911	1901	1902	1881	1878	1865	1866	1864	1871	1876			
20	1636	1651	1651	1665	1658	1660	1648	1642	1631	1613	1609	1599	1609	1604	1622	1630			
25	1354	1378	1372	1389	1371	1374	1353	1357	1349	1324	1324	1306	1315	1306	1330	1336			
30	1000	1037	1036	1054	1034	1042	1024	1017	1010	983	976	948	953	944	975	982			
35	598	620	628	635	623	632	621	610	595	575	570	552	560	571	586	587			
40	252	266	273	288	289	305	301	292	274	258	249	235	240	247	258	248			
45	96.9	106	110	116	117	126	127	123	118	110	103	96.3	96.2	95.2	97.9	93.1			
50	46.1	50.2	51.6	53.4	55.3	59.2	60.3	59.3	57.8	54.2	51.3	47.6	47.3	45.2	45.0	44.5			
55	24.2	25.5	26.3	27.6	28.4	29.8	30.3	30.7	30.0	27.9	26.4	24.9	24.6	23.6	23.5	23.4			
60	15.8	16.3	16.6	17.2	17.6	18.1	18.1	17.8	17.3	16.8	16.3	15.8	15.5	15.2	15.3	15.4			
65	12.4	12.7	12.9	13.3	13.6	13.8	13.9	13.8	13.5	13.1	12.8	12.5	12.3	12.1	12.1	12.2			
70	9.43	9.67	9.87	10.2	10.5	10.7	10.7	10.6	10.4	10.0	9.74	9.41	9.24	9.09	9.15	9.22			
75	6.68	6.90	7.07	7.38	7.61	7.83	7.84	7.76	7.50	7.18	6.92	6.63	6.49	6.38	6.42	6.50			
80	4.21	4.38	4.54	4.80	5.00	5.19	5.19	5.11	4.86	4.58	4.36	4.13	4.00	3.92	3.96	4.03			
85	1.93	2.12	2.22	2.45	2.59	2.72	2.72	2.64	2.42	2.20	2.06	1.83	1.77	1.65	1.73	1.76			
90	0.08	0.08	0.11	0.28	0.34	0.46	0.39	0.33	0.14	0.07	0.06	0.06	0.07	0.06	0.07	0.06			
95	0.09	0.10	0.08	0.10	0.08	0.10	0.08	0.10	0.09	0.06	0.08	0.06	0.09	0.07	0.09	0.07			
100	0.12	0.14	0.11	0.13	0.11	0.13	0.11	0.13	0.12	0.10	0.12	0.10	0.13	0.11	0.14	0.11			
105	0.16	0.18	0.15	0.17	0.14	0.16	0.14	0.17	0.20	0.18	0.21	0.19	0.22	0.21	0.23	0.21			
110	0.24	0.25	0.22	0.24	0.21	0.24	0.21	0.24	0.38	0.37	0.40	0.39	0.42	0.41	0.43	0.41			
115	0.40	0.40	0.37	0.37	0.35	0.37	0.35	0.38	0.71	0.71	0.74	0.74	0.76	0.76	0.77	0.75			
120	0.69	0.68	0.64	0.64	0.62	0.64	0.63	0.66	1.21	1.22	1.25	1.27	1.29	1.30	1.30	1.27			
125	1.14	1.12	1.08	1.07	1.05	1.06	1.07	1.09	1.88	1.91	1.94	1.96	1.99	2.00	1.98	1.96			
130	1.75	1.72	1.68	1.66	1.65	1.65	1.67	1.70	2.72	2.76	2.78	2.82	2.84	2.86	2.83	2.80			
135	2.51	2.47	2.43	2.41	2.39	2.39	2.42	2.46	3.69	3.73	3.75	3.79	3.81	3.82	3.79	3.75			
140	3.37	3.32	3.29	3.26	3.25	3.24	3.28	3.32	4.75	4.79	4.81	4.85	4.86	4.87	4.83	4.79			
145	4.28	4.22	4.20	4.18	4.18	4.16	4.19	4.24	5.80	5.83	5.86	5.88	5.90	5.89	5.85	5.80			
150	5.15	5.10	5.08	5.06	5.08	5.05	5.09	5.14	6.77	6.77	6.82	6.83	6.85	6.83	6.79	6.71			
155	5.94	5.89	5.87	5.90	5.91	5.89	5.88	5.95	7.58	7.57	7.62	7.65	7.68	7.64	7.56	7.48			
160	6.67	6.64	6.61	6.69	6.70	6.67	6.65	6.72	8.24	8.22	8.26	8.31	8.35	8.29	8.20	8.12			
165	7.48	7.45	7.43	7.51	7.52	7.49	7.49	7.56	8.88	8.87	8.89	8.93	8.96	8.90	8.81	8.78			
170	8.32	8.31	8.31	8.37	8.35	8.33	8.36	8.44	9.48	9.51	9.49	9.41	9.46	9.40	9.39	9.36			
175	9.10	9.14	9.16	9.18	9.09	9.13	9.19	9.24	9.84	9.86	9.90	9.77	9.76	9.75	9.80	9.70			
180	9.75	9.81	9.83	9.78	9.73	9.74	9.79	9.77	9.82	9.79	9.86	9.76	9.76	9.74	9.81	9.76			

C Range: 0 - 360DEG

C Interval: 22.5DEG

Test Speed: HIGH

Temperature:25.3℃

Operators:VJC008

Test Date:2023-07-18

γ Range: 0 - 180DEG

γ Interval: 1.0DEG

Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456

Humidity:65.0%

Test Distance:7.580m [K=1.0000]

Remarks: