


## LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:220.70V I:0.0912A P:18.813W PF:0.9347 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1829.06x1 lm		
NAME: DL6106 3000K RA90 40D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC lighting	SUR.: 29*29*10	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 97.22 lm/W			
MODEL	DL6106 3000K RA90 40D	I <sub>max</sub> (cd)	4826	S/MH (C0/180)	0.62
NOMINAL POWER (W)	19	LOR (%)	100.0	S/MH (C90/270)	0.55
RATED VOLTAGE (V)	220	TOTAL FLUX (lm)	1829.1	η UP,DN (C0-180)	0.5,53.8
NOMINAL FLUX (lm)	1829.06	CIE CLASS	DIRECT	η UP,DN (C180-360)	0.5,45.3
LAMPS INSIDE	1	η up (%)	1.0	CIBSE SHR NOM	0.50
TEST VOLTAGE (V)	220	η down (%)	99.0	CIBSE SHR MAX	0.60

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

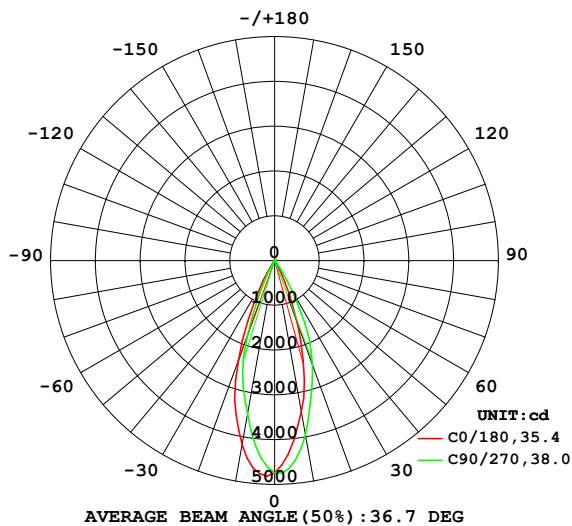

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

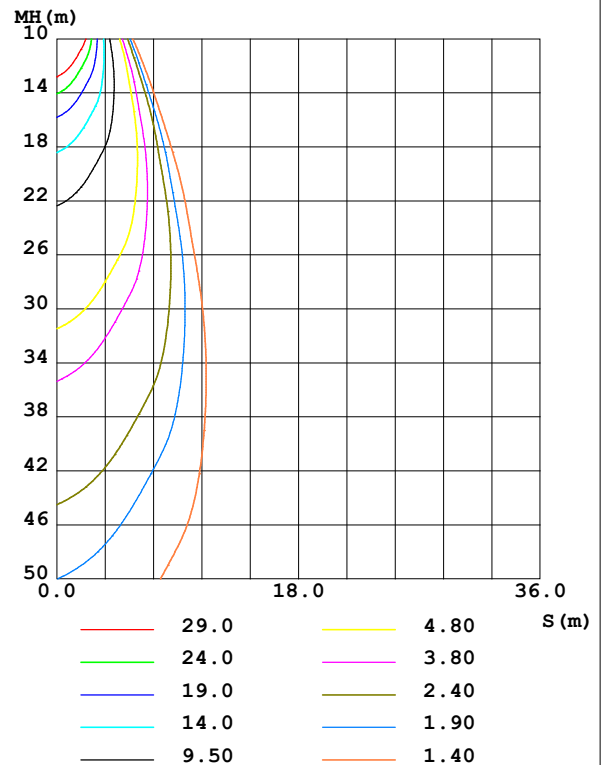

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature: 25.3 °C  
Operators: 001  
Test Date: 2025-04-25

γ Range: 0 - 180DEG  
γ Interval: 2.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.456  
Humidity: 65.0%  
Test Distance: 8.370m [K=1.0000]  
Remarks:

## ZONAL FLUX DIAGRAM

## ZONAL FLUX DIAGRAM:

$\gamma$	C0	C45	C90	C135	C180	C225	C270	C315	$\gamma$	$\Phi$ zone	$\Phi$ total	%lum, lamp
10	3433	3683	3963	4188	4185	3873	3492	3375	0- 10	402.8	402.8	22,22
20	1489	1866	2466	2536	2372	2075	1787	1509	10- 20	804.2	1207	66,66
30	181.5	353.2	835.9	719.5	514.8	325.7	212.4	111.3	20- 30	493.6	1701	93,93
40	24.28	24.86	54.73	36.03	31.72	23.05	27.16	19.00	30- 40	85.71	1786	97.7,97.7
50	11.55	12.08	21.66	14.69	16.14	10.85	13.43	8.853	40- 50	15.43	1802	98.5,98.5
60	2.352	4.794	7.728	6.474	4.963	4.026	2.006	2.606	50- 60	7.349	1809	98.9,98.9
70	0.6386	0.6464	0.5930	1.211	0.7041	0.4282	0.2602	0.3335	60- 70	1.841	1811	99,99
80	0.2352	0.2188	0.2386	0.3035	0.3339	0.1353	0.0525	0.0776	70- 80	0.3840	1811	99,99
90	0.0111	0.0195	0.0472	0.0503	0.0138	0.0111	0.0194	0.0139	80- 90	0.0998	1811	99,99
100	0.0111	0.0111	0.0166	0.0111	0.0221	0.0249	0.0361	0.0334	90-100	0.0177	1811	99,99
110	0.0965	0.0524	0.0387	0.0278	0.0581	0.0804	0.1500	0.1506	100-110	0.0408	1811	99,99
120	0.7722	0.5658	0.3899	0.3469	0.3710	0.5460	0.9187	0.9556	110-120	0.2712	1812	99.1,99.1
130	2.864	2.373	1.954	1.800	1.774	2.224	2.899	3.138	120-130	1.223	1813	99.1,99.1
140	6.245	5.543	4.901	4.705	4.637	5.301	6.148	6.563	130-140	2.959	1816	99.3,99.3
150	9.517	8.930	8.446	8.302	8.278	8.893	9.539	9.874	140-150	4.547	1820	99.5,99.5
160	10.74	10.51	10.52	10.66	10.76	10.99	11.07	11.01	150-160	4.654	1825	99.8,99.8
170	9.742	9.977	10.30	10.58	10.53	10.55	10.17	9.846	160-170	3.023	1828	99.9,99.9
180	9.766	10.01	9.865	9.980	9.807	10.02	9.879	9.980	170-180	0.9551	1829	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 1796.7 lm

%lum = 98.2%

%lamp = 98.2%

Conical surface Flux(130deg): 1810.5 lm

%lum = 99.0%


%lamp = 99.0%

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3℃  
 Operators:001  
 Test Date:2025-04-25

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 2.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.456  
 Humidity:65.0%  
 Test Distance:8.370m [K=1.0000]  
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:220.70V I:0.0912A P:18.813W PF:0.9347 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1829.06x1 lm		
NAME: DL6106 3000K RA90 40D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC lighting	SUR.: 29*29*10	Shielding Angle:

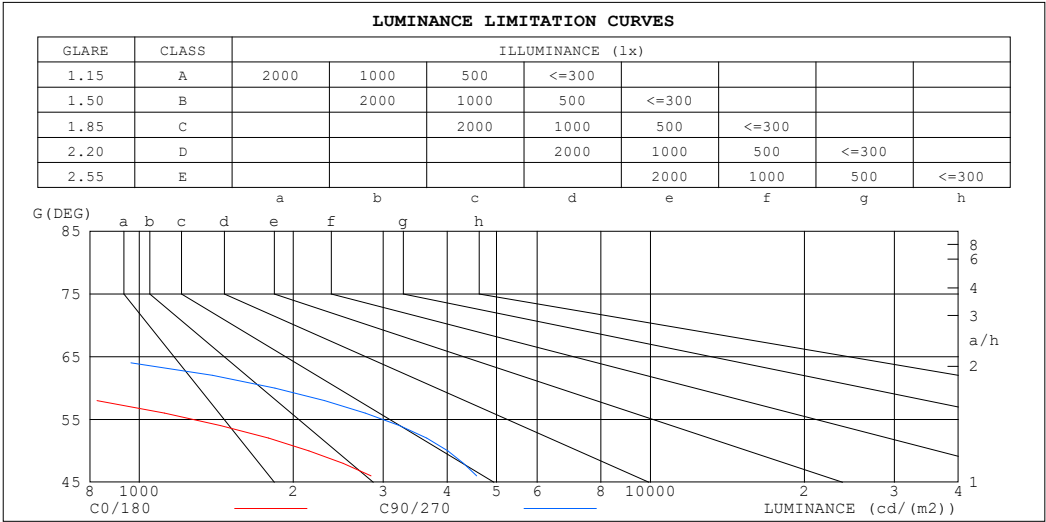

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	148	194
80	162	164
75	215	195
70	223	207
65	262	998
60	562	1841
55	1477	3310
50	2148	4015
45	3214	5014


C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:001  
Test Date:2025-04-25

γ Range: 0 - 180DEG  
γ Interval: 2.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.456  
Humidity:65.0%  
Test Distance:8.370m [K=1.0000]  
Remarks:

## CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.70V I:0.0912A P:18.813W PF:0.9347 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1829.06x1 lm		
NAME: DL6106 3000K RA90 40D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC lighting	SUR.: 29*29*10	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

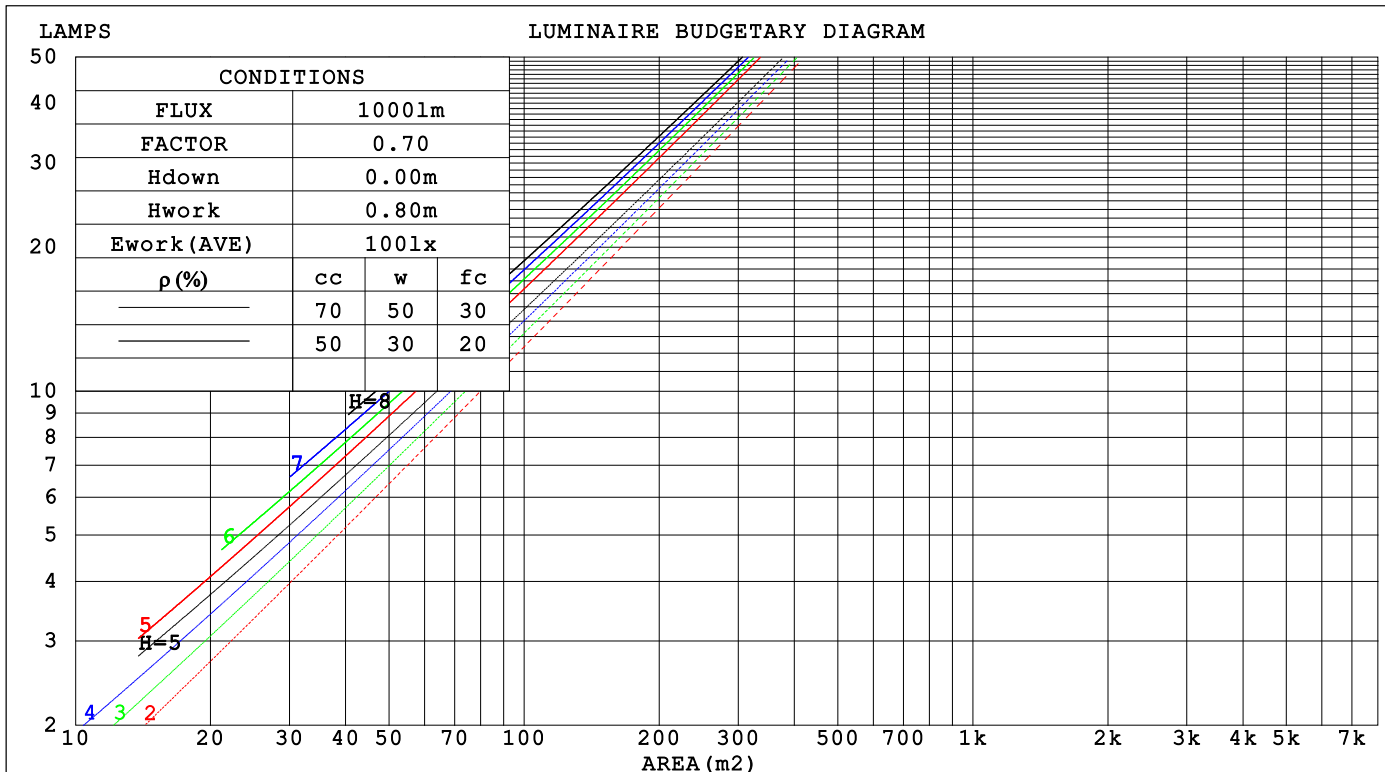

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:001  
Test Date:2025-04-25

γ Range: 0 - 180DEG  
γ Interval: 2.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.456  
Humidity:65.0%  
Test Distance:8.370m [K=1.0000]  
Remarks:

### WEC AND CCEC

Test:U:220.70V I:0.0912A P:18.813W PF:0.9347 Freq:49.99Hz			UTHDi:0.00% ITHDi:0.00% KDisp:0			Lamp Flux:1829.06x1 lm		
NAME: DL6106 3000K RA90 40D			TYPE:			WEIGHT:		
SPEC.:			DIM.:			SERIAL No.:		
MFR.: VJC lighting			SUR.: 29*29*10			Shielding Angle:		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.150	.085	.027	.143	.082	.026	.130	.075	.024	.118	.068	.022	.107	.062	.020		
2.0	.140	.077	.024	.135	.074	.023	.124	.069	.021	.114	.064	.020	.105	.059	.019		
3.0	.132	.070	.021	.127	.068	.020	.118	.064	.019	.109	.060	.018	.102	.056	.017		
4.0	.125	.065	.019	.120	.063	.019	.113	.060	.018	.105	.057	.017	.099	.054	.016		
5.0	.118	.060	.017	.115	.059	.017	.108	.056	.017	.101	.054	.016	.096	.051	.015		
6.0	.112	.056	.016	.109	.055	.016	.103	.053	.015	.098	.051	.015	.093	.049	.014		
7.0	.107	.053	.015	.104	.052	.015	.099	.050	.014	.094	.048	.014	.090	.047	.014		
8.0	.103	.050	.014	.100	.049	.014	.096	.048	.014	.091	.046	.013	.087	.045	.013		
9.0	.098	.048	.013	.096	.047	.013	.092	.046	.013	.088	.044	.013	.085	.043	.012		
10.0	.095	.045	.013	.093	.045	.012	.089	.044	.012	.085	.042	.012	.082	.041	.012		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)										
0.0	.198	.198	.198	.169	.169	.169	.115	.115	.115	.066	.066	.066	.021	.021	.021		
1.0	.177	.165	.154	.151	.142	.133	.103	.097	.092	.060	.056	.053	.019	.018	.017		
2.0	.160	.140	.124	.137	.121	.107	.094	.083	.075	.054	.049	.044	.017	.016	.014		
3.0	.145	.121	.101	.125	.104	.088	.086	.072	.062	.049	.042	.036	.016	.014	.012		
4.0	.134	.106	.084	.115	.091	.073	.079	.064	.052	.046	.037	.031	.015	.012	.010		
5.0	.124	.094	.071	.106	.081	.062	.073	.057	.044	.042	.033	.026	.014	.011	.009		
6.0	.116	.084	.061	.099	.073	.053	.069	.051	.038	.040	.030	.022	.013	.010	.007		
7.0	.108	.076	.053	.093	.066	.046	.064	.046	.033	.037	.027	.020	.012	.009	.006		
8.0	.102	.069	.047	.088	.060	.041	.061	.042	.029	.035	.025	.017	.011	.008	.006		
9.0	.097	.064	.042	.084	.056	.036	.058	.039	.026	.034	.023	.015	.011	.008	.005		
10.0	.092	.059	.038	.080	.052	.033	.055	.036	.023	.032	.021	.014	.010	.007	.005		

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:001  
Test Date:2025-04-25

γ Range: 0 - 180DEG  
γ Interval: 2.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.456  
Humidity:65.0%  
Test Distance:8.370m [K=1.0000]  
Remarks:

UGR(Unified Glare Rating) Table

Test:U:220.70V I:0.0912A P:18.813W PF:0.9347 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1829.06x1 lm										
NAME: DL6106 3000K RA90 40D					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: VJC lighting					SUR.: 29*29*10			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	1.4	2.2	1.7	2.3	2.5	9.9	10.7	10.1	10.8	11.0
3H	1.3	2.0	1.6	2.2	2.4	9.8	10.5	10.0	10.7	10.9
4H	1.2	1.9	1.5	2.1	2.4	9.7	10.3	10.0	10.6	10.8
6H	1.2	1.8	1.5	2.0	2.3	9.6	10.2	9.9	10.5	10.7
8H	1.1	1.7	1.4	2.0	2.3	9.6	10.1	9.9	10.4	10.7
12H	1.1	1.6	1.4	1.9	2.2	9.5	10.1	9.8	10.4	10.6
4H 2H	1.4	2.0	1.7	2.3	2.5	9.7	10.3	10.0	10.6	10.8
3H	1.3	1.8	1.6	2.1	2.4	9.5	10.1	9.9	10.4	10.7
4H	1.2	1.7	1.5	2.0	2.3	9.4	9.9	9.8	10.3	10.6
6H	1.1	1.6	1.5	1.9	2.3	9.3	9.8	9.7	10.1	10.5
8H	1.1	1.5	1.5	1.8	2.2	9.3	9.7	9.7	10.1	10.4
12H	1.0	1.4	1.4	1.8	2.2	9.2	9.6	9.6	10.0	10.4
8H 4H	1.0	1.5	1.4	1.8	2.2	9.3	9.7	9.7	10.1	10.4
6H	1.0	1.3	1.4	1.7	2.1	9.2	9.5	9.6	9.9	10.4
8H	0.9	1.2	1.4	1.6	2.1	9.1	9.4	9.6	9.8	10.3
12H	0.8	1.1	1.3	1.6	2.1	9.0	9.3	9.5	9.8	10.3
12H 4H	1.0	1.4	1.4	1.8	2.2	9.2	9.6	9.6	10.0	10.4
6H	0.9	1.2	1.4	1.6	2.1	9.1	9.4	9.6	9.8	10.3
8H	0.8	1.1	1.3	1.6	2.1	9.0	9.3	9.5	9.8	10.3
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 1.9 / - 3.9					+ 5.6 / - 5.5				
1.5H	+ 1.8 / - 2.0					+ 7.7 / - 5.1				
2.0H	+ 3.7 / - 7.1					+ 3.8 / - 5.7				

CIE Pub.117, 1829 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 2.1)  
Area: 0.0084 m2

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:001  
Test Date:2025-04-25

γ Range: 0 - 180DEG  
γ Interval: 2.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.456  
Humidity:65.0%  
Test Distance:8.370m [K=1.0000]  
Remarks:

### UTILIZATION FACTORS TABLE

Test:U:220.70V I:0.0912A P:18.813W PF:0.9347 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1829.06x1 lm		
NAME: DL6106 3000K RA90 40D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC lighting	SUR.: 29*29*10	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	90	84	81	90	84	81	89	84	81	77
0.80	97	92	88	96	91	88	95	91	88	84
1.00	101	96	93	100	95	92	98	95	92	88
1.25	105	100	97	104	99	96	102	98	95	91
1.50	107	103	100	106	102	99	104	100	98	94
2.00	109	105	103	108	104	102	105	102	100	95
2.50	111	107	105	109	106	104	106	104	102	96
3.00	112	109	107	110	108	105	107	105	103	97
4.00	114	112	110	112	110	108	108	107	105	98
5.00	115	113	112	113	111	110	109	108	107	99
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature: 25.3℃  
Operators: 001  
Test Date: 2025-04-25

γ Range: 0 - 180DEG  
γ Interval: 2.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.456  
Humidity: 65.0%  
Test Distance: 8.370m [K=1.0000]  
Remarks:

## ISOCANDELA DIAGRAM

Test:U:220.70V I:0.0912A P:18.813W PF:0.9347 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1829.06x1 lm		
NAME: DL6106 3000K RA90 40D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC lighting	SUR.: 29*29*10	Shielding Angle:

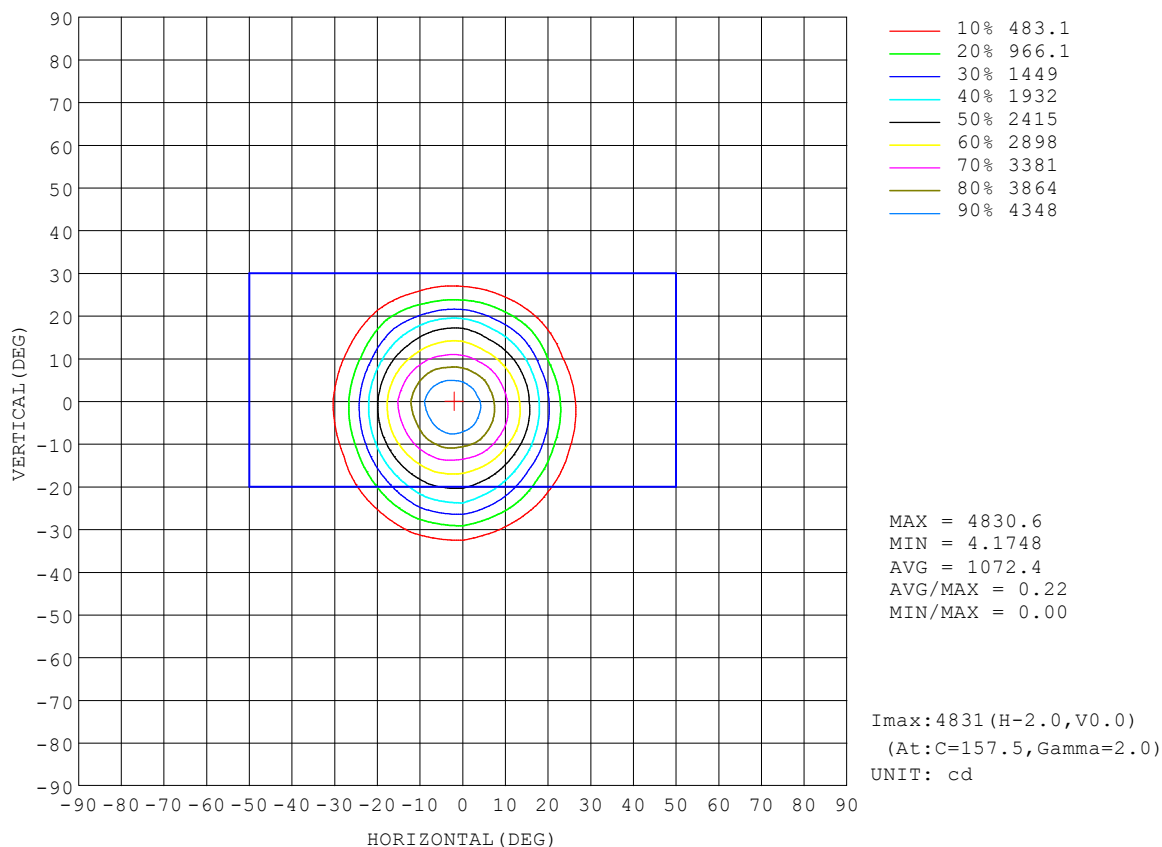


C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:001  
Test Date:2025-04-25

γ Range: 0 - 180DEG  
γ Interval: 2.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.456  
Humidity:65.0%  
Test Distance:8.370m [K=1.0000]  
Remarks:

### AAI Figure

Test:U:220.70V I:0.0912A P:18.813W PF:0.9347 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1829.06x1 lm		
NAME: DL6106 3000K RA90 40D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC lighting	SUR.: 29*29*10	Shielding Angle:

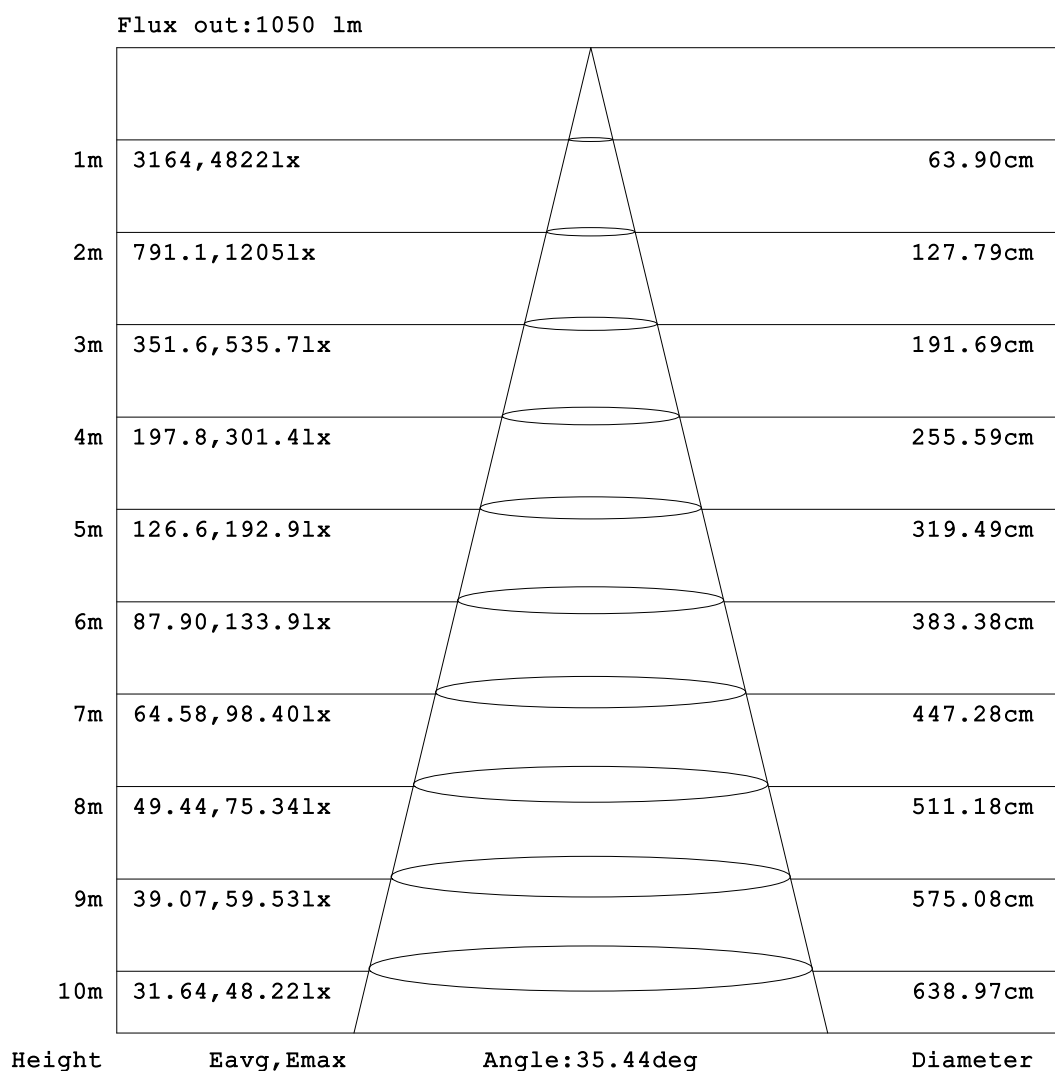


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:001  
Test Date:2025-04-25

γ Range: 0 - 180DEG  
γ Interval: 2.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.456  
Humidity:65.0%  
Test Distance:8.370m [K=1.0000]  
Remarks:

## ISOLUX DIAGRAM

Test:U:220.70V I:0.0912A P:18.813W PF:0.9347 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1829.06x1 lm		
NAME: DL6106 3000K RA90 40D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC lighting	SUR.: 29*29*10	Shielding Angle:

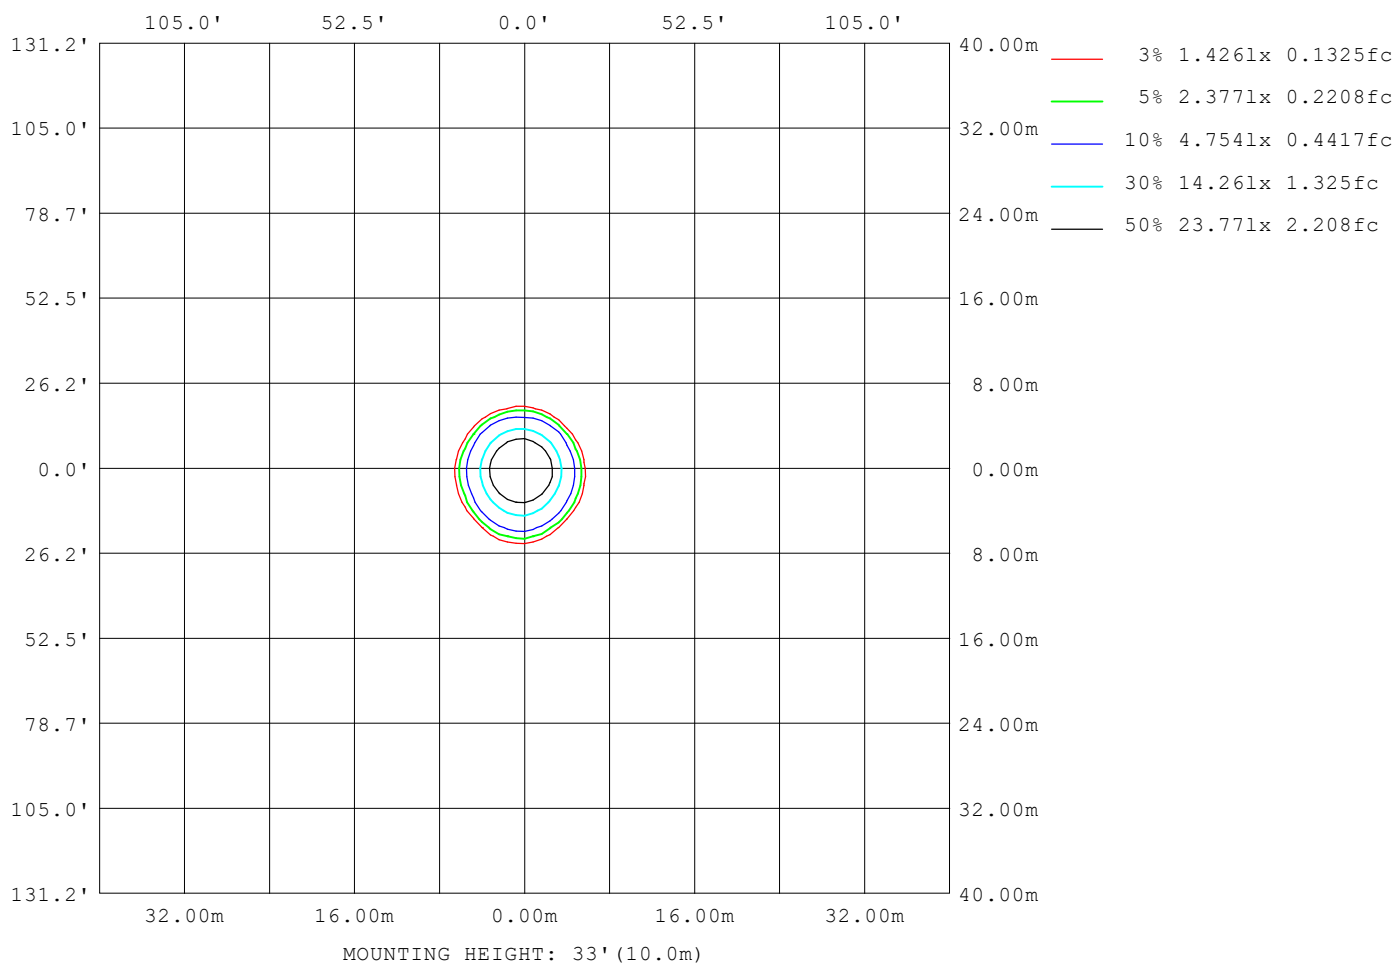

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature: 25.3°C  
Operators: 001  
Test Date: 2025-04-25

γ Range: 0 - 180DEG  
γ Interval: 2.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.456  
Humidity: 65.0%  
Test Distance: 8.370m [K=1.0000]  
Remarks:

## LED Avg.L Report

Test:U:220.70V I:0.0912A P:18.813W PF:0.9347 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1829.06x1 lm		
NAME: DL6106 3000K RA90 40D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC lighting	SUR.: 29*29*10	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	347
L_0~180 (75) av	218
L_0~180 (85) av	164
L_90~270 (65) av	446
L_90~270 (75) av	123
L_90~270 (85) av	97
L_45 (65) av	552
L_45 (75) av	148
L_45 (85) av	100

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:001  
Test Date:2025-04-25

γ Range: 0 - 180DEG  
γ Interval: 2.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.456  
Humidity:65.0%  
Test Distance:8.370m [K=1.0000]  
Remarks:

## Planar Illuminance Curve

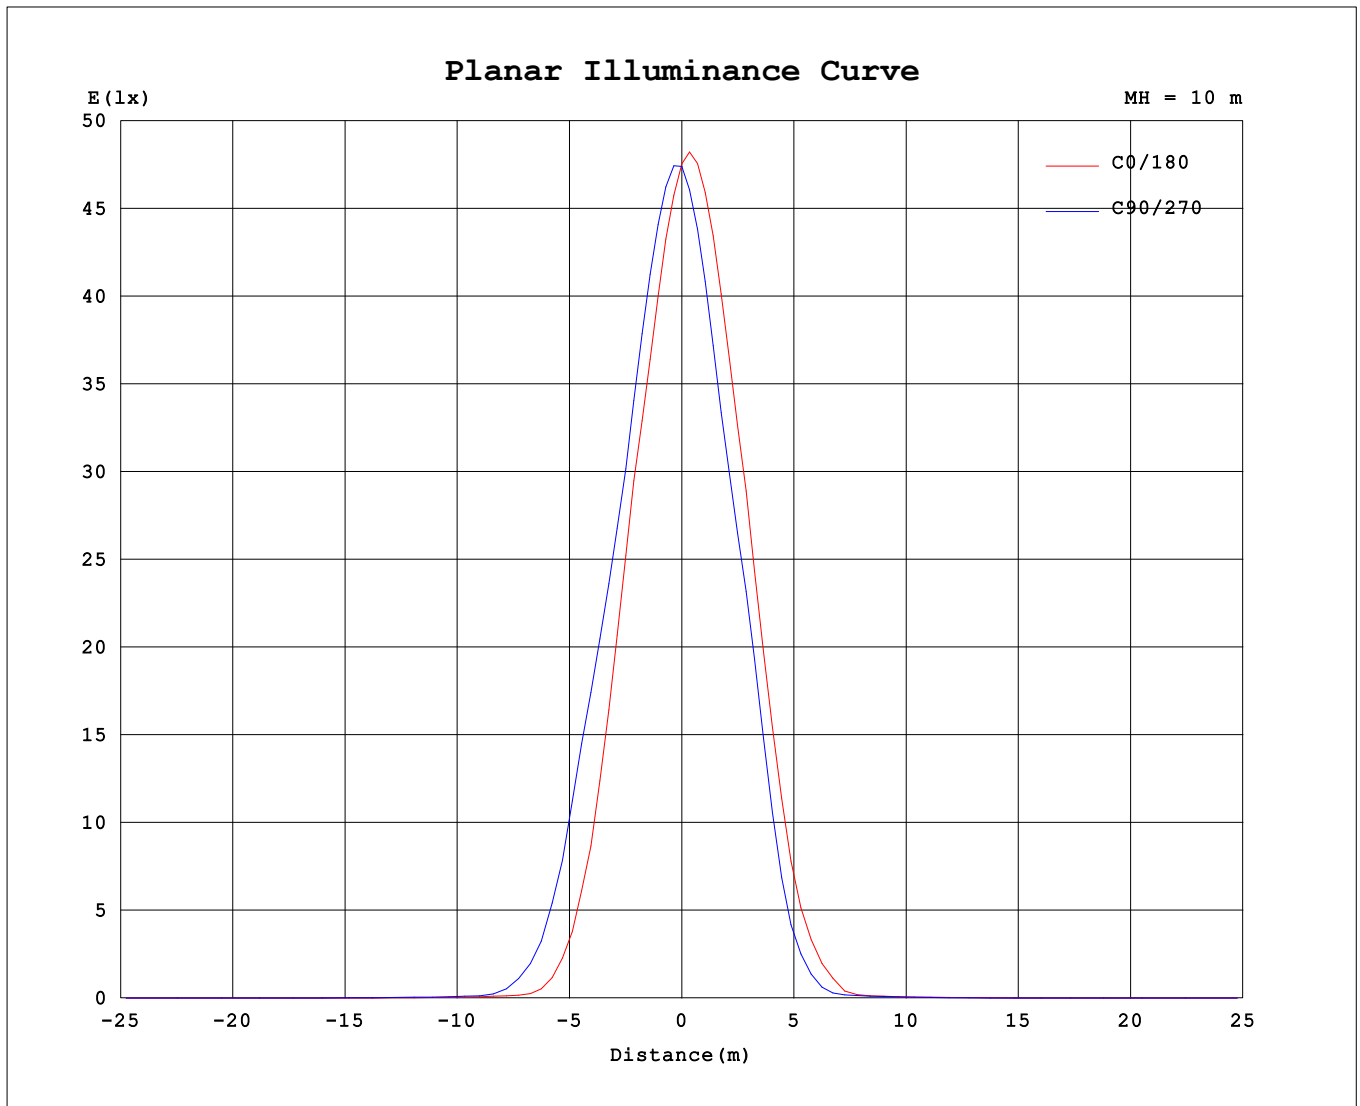

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature: 25.3 °C  
Operators: 001  
Test Date: 2025-04-25

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 2.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.456  
Humidity: 65.0%  
Test Distance: 8.370m [K=1.0000]  
Remarks:

## LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.70V I:0.0912A P:18.813W PF:0.9347 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1829.06x1 lm		
NAME: DL6106 3000K RA90 40D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC lighting	SUR.: 29*29*10	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	4736	4736	4736	4736	4736	4736	4736	4736	4736	4736	4736	4736	4736	4736	4736	4736			
5	4342	4399	4462	4565	4654	4749	4783	4798	4773	4680	4594	4487	4413	4348	4331	4329			
10	3433	3552	3683	3850	3963	4128	4188	4201	4185	4046	3873	3622	3492	3392	3375	3394			
15	2750	2918	3014	3183	3300	3489	3566	3563	3559	3387	3178	3005	2901	2719	2679	2719			
20	1489	1625	1866	2199	2466	2555	2536	2494	2372	2207	2075	1959	1787	1561	1509	1401			
25	803	885	1124	1534	1903	1928	1757	1617	1487	1313	1311	1044	900	824	787	653			
30	182	245	353	555	836	841	719	525	515	399	326	247	212	167	111	156			
35	47.6	63.8	90.6	214	347	357	241	211	201	118	70.9	90.4	53.2	50.4	33.9	40.2			
40	24.3	25.7	24.9	34.4	54.7	66.8	36.0	34.3	31.7	27.8	23.0	24.8	27.2	21.9	19.0	21.5			
45	19.0	19.0	18.7	23.1	29.8	28.0	22.9	24.6	23.7	20.1	17.0	18.4	22.1	16.3	14.0	15.6			
50	11.6	11.1	12.1	15.1	21.7	17.4	14.7	15.2	16.1	12.1	10.9	11.1	13.4	9.38	8.85	9.08			
55	7.09	7.33	8.82	11.0	15.9	12.5	10.8	10.5	11.3	8.25	7.96	7.18	7.82	5.83	6.15	5.73			
60	2.35	3.14	4.79	5.66	7.73	6.82	6.47	5.20	4.96	3.87	4.03	2.56	2.01	1.87	2.61	2.07			
65	0.93	1.35	2.58	2.88	3.54	3.73	4.02	2.65	2.13	1.80	1.95	0.95	0.50	0.65	0.97	0.83			
70	0.64	0.60	0.65	0.66	0.59	0.95	1.21	0.71	0.70	0.61	0.43	0.34	0.26	0.30	0.33	0.52			
75	0.46	0.46	0.41	0.38	0.42	0.42	0.50	0.55	0.57	0.48	0.29	0.24	0.16	0.20	0.22	0.37			
80	0.24	0.22	0.22	0.20	0.24	0.24	0.30	0.33	0.33	0.28	0.14	0.11	0.05	0.08	0.08	0.17			
85	0.11	0.08	0.11	0.10	0.14	0.14	0.19	0.20	0.19	0.14	0.05	0.05	0.02	0.03	0.01	0.06			
90	0.01	0.01	0.02	0.02	0.05	0.02	0.05	0.03	0.01	0.01	0.01	0.01	0.02	0.01	0.01	0.01			
95	0.01	0.01	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02	0.01	0.02	0.01			
100	0.01	0.03	0.01	0.02	0.02	0.02	0.01	0.02	0.02	0.01	0.02	0.01	0.04	0.01	0.03	0.01			
105	0.02	0.04	0.01	0.04	0.02	0.03	0.01	0.04	0.03	0.01	0.03	0.01	0.06	0.03	0.05	0.02			
110	0.10	0.10	0.05	0.07	0.04	0.06	0.03	0.07	0.06	0.03	0.08	0.08	0.15	0.14	0.15	0.09			
115	0.24	0.22	0.15	0.14	0.10	0.11	0.08	0.12	0.11	0.10	0.17	0.22	0.33	0.36	0.34	0.26			
120	0.77	0.68	0.57	0.49	0.39	0.38	0.35	0.40	0.37	0.42	0.55	0.73	0.92	1.00	0.96	0.85			
125	1.42	1.26	1.10	0.97	0.85	0.79	0.75	0.81	0.76	0.86	1.03	1.31	1.55	1.69	1.65	1.54			
130	2.86	2.60	2.37	2.14	1.95	1.83	1.80	1.87	1.77	1.96	2.22	2.61	2.90	3.14	3.14	3.03			
135	4.10	3.78	3.51	3.20	2.98	2.82	2.80	2.89	2.76	2.99	3.31	3.75	4.07	4.36	4.39	4.30			
140	6.24	5.86	5.54	5.17	4.90	4.71	4.70	4.82	4.64	4.93	5.30	5.81	6.15	6.50	6.56	6.51			
145	7.68	7.29	6.98	6.61	6.36	6.15	6.16	6.29	6.09	6.41	6.76	7.29	7.60	7.94	8.02	8.00			
150	9.52	9.19	8.93	8.66	8.45	8.29	8.30	8.47	8.28	8.55	8.89	9.30	9.54	9.79	9.87	9.87			
155	10.3	10.1	9.85	9.72	9.57	9.49	9.51	9.72	9.53	9.74	10.0	10.3	10.5	10.6	10.7	10.7			
160	10.7	10.6	10.5	10.5	10.5	10.6	10.7	10.9	10.8	10.8	11.0	11.1	11.1	11.1	11.0	11.0			
165	10.5	10.4	10.5	10.6	10.6	10.8	10.9	11.1	10.9	11.0	11.0	11.0	10.9	10.8	10.6	10.6			
170	9.74	9.79	9.98	10.2	10.3	10.5	10.6	10.6	10.5	10.7	10.5	10.3	10.2	10.1	9.85	9.82			
175	9.50	9.59	9.80	9.86	9.93	10.1	10.3	10.2	10.1	10.3	10.3	10.00	9.80	9.81	9.73	9.52			
180	9.77	9.85	10.0	9.91	9.87	9.90	9.98	9.79	9.81	9.85	10.0	9.89	9.88	9.88	9.98	9.76			

C Range: 0 - 360DEG

C Interval: 22.5DEG

Test Speed: HIGH

Temperature:25.3℃

Operators:001

Test Date:2025-04-25

γ Range: 0 - 180DEG

γ Interval: 2.0DEG

Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.456

Humidity:65.0%

Test Distance:8.370m [K=1.0000]

Remarks: