

Linear Spots 10

IP21

Class III

Ceiling Recessed


Anti glare hazard
UGR<19

RG1 | Blue light

280x37mm

Altamente riciclabile
Highly recyclable

FSC
Package

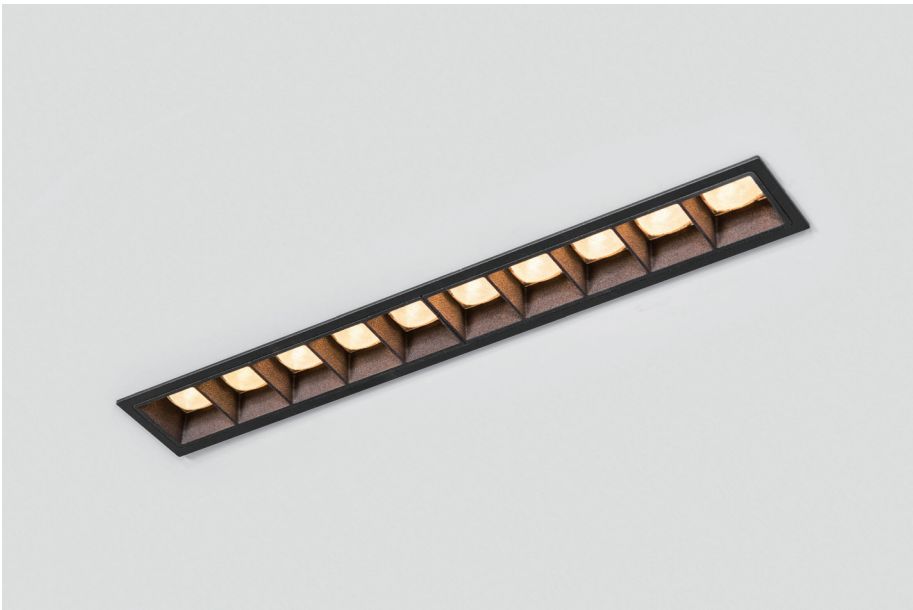


20W 10 spots linear downlight

Code	System Power	LED Power	Lumens(at 3000K)	CRI	Lifetime (Ta 25°C)
DL6106	18W	500mA 36V	1829lm	≥90	50.000h L90B20

Finish	LED CCT	Beam
Powder Coat	2700K	40°
Liquid Paint	3000K	60°
Anodize	4000K	80°

Key Information	
Material	Aluminium
Mounting	Ceiling Surface
Warranty	5 Year



Light Distribution for 3000K

Narrow 40°

h(m)	E(lx)	o(m)
1	4822	ø0.64
2	1205	ø1.28
3	535.7	ø1.92
4	301.4	ø2.55
5	192.9	ø3.19

Gear
This product is supplied without gear.