


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:220.66V I:0.0544A P:6.9700W PF:0.5810 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:349.294x1 lm		
NAME: DL3811 3000K RA90 15D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 22	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 50.11 lm/W			
MODEL	DL3811 3000K RA90 15D	I _{max} (cd)	2425	S/MH(C0/180)	0.36
NOMINAL POWER(W)	6	LOR(%)	100.0	S/MH(C90/270)	0.32
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	349.29	η UP,DN(C0-180)	0.3,50.9
NOMINAL FLUX(lm)	349.294	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.4,48.3
LAMPS INSIDE	1	η up(%)	0.7	CIBSE SHR NOM	0.00
TEST VOLTAGE(V)	220	η down(%)	99.3	CIBSE SHR MAX	0.30

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

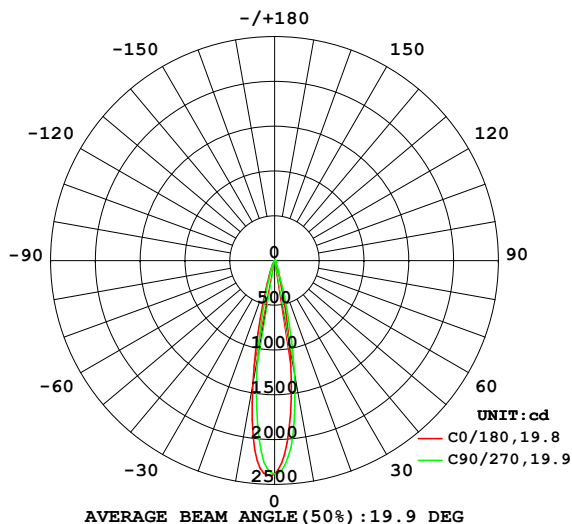

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

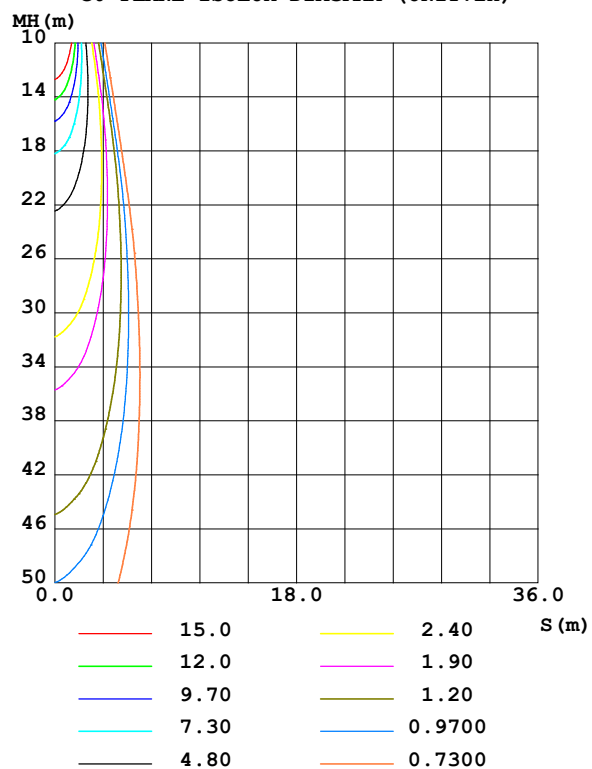

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3 °C
Operators: VJC008
Test Date: 2023-07-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity: 65.0%
Test Distance: 7.580m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	970.0	1046	1282	1496	1405	1305	1096	911.6	0- 10	167.4	167.4	47.9,47.9
20	93.60	92.77	133.7	181.5	179.5	166.9	135.9	102.2	10- 20	128.4	295.8	84.7,84.7
30	23.73	19.85	22.82	26.28	26.34	24.88	23.39	22.94	20- 30	29.78	325.6	93.2,93.2
40	7.286	7.019	6.923	6.799	8.085	8.109	7.304	7.209	30- 40	7.631	333.2	95.4,95.4
50	5.224	5.410	5.636	6.061	6.425	6.403	5.884	5.274	40- 50	4.926	338.1	96.8,96.8
60	3.008	3.124	3.491	3.954	3.985	3.818	3.396	3.031	50- 60	4.236	342.4	98,98
70	1.697	1.790	2.049	2.332	2.296	2.184	1.930	1.687	60- 70	2.677	345.0	98.8,98.8
80	0.5828	0.6457	0.8358	1.018	0.9562	0.8679	0.7102	0.5494	70- 80	1.438	346.5	99.2,99.2
90	0	0	0	0.0003	0	0	0	0	80- 90	0.3105	346.8	99.3,99.3
100	0	0	0	0	0	0	0	0	90-100	0.0000	346.8	99.3,99.3
110	0.0022	0	0	0	0	0	0	0	100-110	0.0009	346.8	99.3,99.3
120	0.0403	0.0386	0.0410	0.0321	0.0202	0.0204	0.0228	0.0298	110-120	0.0156	346.8	99.3,99.3
130	0.0671	0.0658	0.0615	0.0550	0.1099	0.1092	0.1395	0.1863	120-130	0.0502	346.9	99.3,99.3
140	0.3081	0.2853	0.2298	0.1831	0.6545	0.6843	0.7948	0.9328	130-140	0.1974	347.0	99.4,99.4
150	1.254	1.213	1.071	0.9486	1.722	1.760	1.871	1.974	140-150	0.5973	347.6	99.5,99.5
160	2.114	2.103	2.054	1.977	2.318	2.335	2.349	2.315	150-160	0.8650	348.5	99.8,99.8
170	1.835	1.880	1.991	2.045	2.062	2.069	1.992	1.839	160-170	0.6177	349.1	100,100
180	1.372	1.439	1.434	1.452	1.398	1.437	1.432	1.434	170-180	0.1643	349.3	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 335.69 lm

%lum = 96.1%

%lamp = 96.1%

Conical surface Flux(130deg): 343.85 lm

%lum = 98.4%


%lamp = 98.4%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:VJC008
 Test Date:2023-07-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:7.580m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:220.66V I:0.0544A P:6.9700W PF:0.5810 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:349.294x1 lm		
NAME: DL3811 3000K RA90 15D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 22	Shielding Angle:

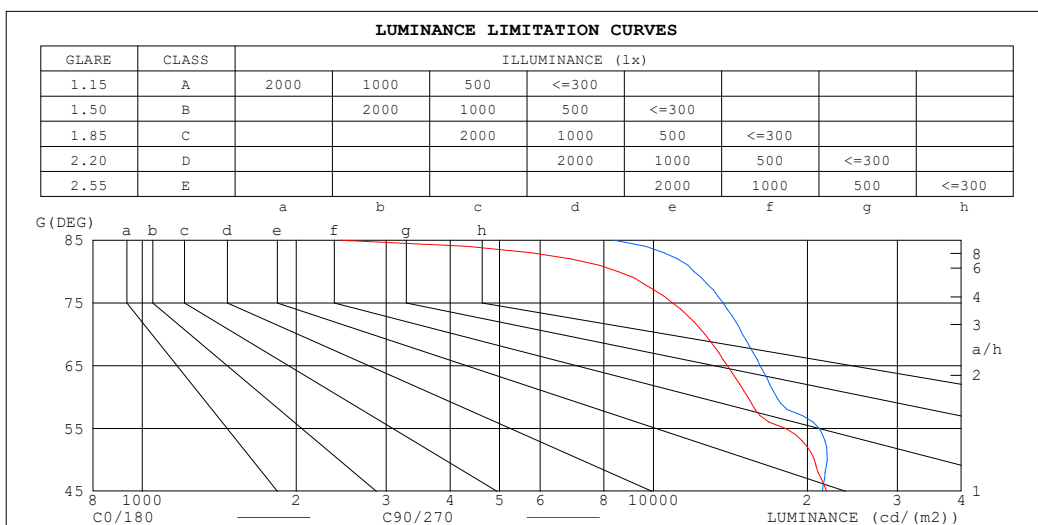

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	2447	8389
80	8530	12002
75	10910	13700
70	12610	14939
65	13947	16168
60	15291	17407
55	18126	21104
50	20653	21862
45	21799	21400


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3 °C
Operators: VJC008
Test Date: 2023-07-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity: 65.0%
Test Distance: 7.580m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.66V I:0.0544A P:6.9700W PF:0.5810 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:349.294x1 lm		
NAME: DL3811 3000K RA90 15D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 22	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0														
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
pfc	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Coefficients of Utilization(CU)														
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.01	1.01	1.01	.99														
1.0	1.13	1.11	1.09	1.11	1.09	1.07	1.07	1.05	1.04	1.03	1.02	1.01	.99	.99	.98	.96														
2.0	1.08	1.05	1.02	1.06	1.03	1.01	1.03	1.01	.99	.00	.98	.97	.97	.96	.95	.93														
3.0	1.04	1.00	.97	1.02	.99	.96	.00	.97	.95	.97	.95	.93	.95	.93	.92	.91														
4.0	.00	.96	.93	.99	.95	.93	.97	.94	.92	.95	.92	.90	.93	.91	.89	.88														
5.0	.97	.93	.90	.96	.92	.89	.94	.91	.89	.93	.90	.88	.91	.89	.87	.86														
6.0	.94	.90	.87	.93	.89	.87	.92	.89	.86	.90	.88	.86	.89	.87	.85	.84														
7.0	.91	.87	.85	.91	.87	.85	.90	.86	.84	.89	.86	.84	.88	.85	.83	.82														
8.0	.89	.85	.83	.89	.85	.82	.88	.84	.82	.87	.84	.82	.86	.83	.81	.81														
9.0	.87	.83	.81	.87	.83	.81	.86	.83	.80	.85	.82	.80	.84	.82	.80	.79														
10.0	.85	.81	.79	.85	.81	.79	.84	.81	.79	.83	.81	.79	.83	.80	.78	.77														

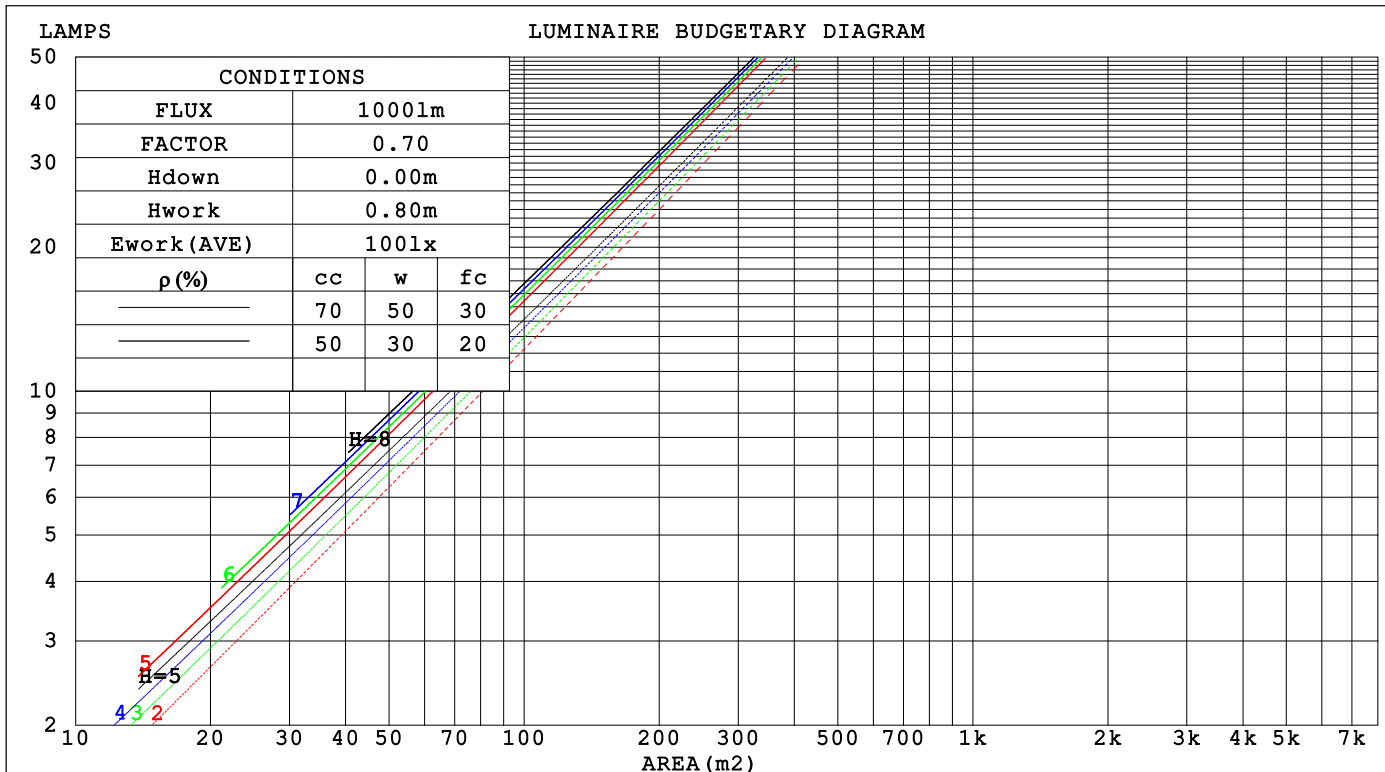

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:VJC008
Test Date:2023-07-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:7.580m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:220.66V I:0.0544A P:6.9700W PF:0.5810 Freq:49.99Hz			UTHDi:0.00% ITHDi:0.00% KDisp:0			Lamp Flux:349.294x1 lm		
NAME: DL3811 3000K RA90 15D			TYPE:			WEIGHT:		
SPEC.:			DIM.:			SERIAL No.:		
MFR.: VJC Lighting			SUR.: 22			Shielding Angle:		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.135	.076	.024	.128	.073	.023	.115	.066	.021	.103	.060	.019	.092	.054	.017		
2.0	.124	.068	.021	.118	.065	.020	.107	.060	.019	.098	.055	.017	.089	.050	.016		
3.0	.114	.061	.018	.109	.059	.018	.101	.055	.017	.092	.051	.016	.085	.047	.015		
4.0	.106	.055	.016	.102	.053	.016	.095	.050	.015	.088	.047	.014	.081	.044	.013		
5.0	.099	.050	.015	.096	.049	.014	.089	.046	.014	.083	.044	.013	.078	.042	.012		
6.0	.093	.046	.013	.090	.045	.013	.084	.043	.013	.079	.041	.012	.075	.039	.012		
7.0	.087	.043	.012	.085	.042	.012	.080	.041	.012	.076	.039	.011	.072	.037	.011		
8.0	.083	.040	.011	.080	.040	.011	.076	.038	.011	.072	.037	.011	.069	.035	.010		
9.0	.078	.038	.011	.077	.037	.010	.073	.036	.010	.069	.035	.010	.066	.034	.010		
10.0	.075	.036	.010	.073	.035	.010	.070	.034	.010	.067	.033	.009	.064	.032	.009		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)										
0.0	.196	.196	.196	.167	.167	.167	.114	.114	.114	.066	.066	.066	.021	.021	.021		
1.0	.174	.163	.154	.149	.140	.132	.102	.096	.092	.059	.056	.053	.019	.018	.017		
2.0	.155	.138	.124	.133	.119	.107	.091	.082	.075	.053	.048	.044	.017	.015	.014		
3.0	.140	.119	.102	.120	.103	.088	.082	.071	.062	.048	.042	.037	.015	.014	.012		
4.0	.127	.103	.085	.109	.089	.074	.075	.062	.052	.043	.036	.031	.014	.012	.010		
5.0	.116	.091	.072	.100	.079	.063	.069	.055	.044	.040	.032	.026	.013	.011	.009		
6.0	.107	.081	.062	.092	.070	.054	.063	.049	.038	.037	.029	.023	.012	.009	.008		
7.0	.099	.073	.054	.085	.063	.047	.059	.044	.033	.034	.026	.020	.011	.009	.007		
8.0	.092	.066	.048	.079	.057	.041	.055	.040	.029	.032	.024	.018	.010	.008	.006		
9.0	.086	.060	.042	.074	.052	.037	.051	.037	.026	.030	.022	.016	.010	.007	.005		
10.0	.081	.055	.038	.070	.048	.033	.048	.034	.023	.028	.020	.014	.009	.007	.005		

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:VJC008
Test Date:2023-07-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:7.580m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:220.66V I:0.0544A P:6.9700W PF:0.5810 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:349.294x1 lm											
NAME: DL3811 3000K RA90 15D						TYPE:		WEIGHT:			
SPEC.:						DIM.:		SERIAL No.:			
MFR.: VJC Lighting						SUR.: 22		Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	Viewed crosswise					Viewed endwise					
x = 2H y = 2H	17.6	18.2	17.8	18.4	18.6	17.9	18.5	18.1	18.6	18.8	
	3H	18.6	19.2	18.9	19.4	19.6	19.0	19.6	19.3	19.8	20.0
	4H	19.0	19.5	19.2	19.7	20.0	19.5	20.0	19.8	20.3	20.5
	6H	19.2	19.7	19.5	20.0	20.2	19.8	20.4	20.1	20.6	20.9
	8H	19.2	19.7	19.5	20.0	20.3	19.9	20.4	20.3	20.7	21.0
	12H	19.2	19.7	19.5	20.0	20.2	20.0	20.5	20.3	20.7	21.0
4H	2H	18.1	18.6	18.4	18.9	19.1	18.3	18.8	18.6	19.0	19.3
	3H	19.2	19.7	19.6	20.0	20.3	19.6	20.1	19.9	20.4	20.6
	4H	19.7	20.2	20.1	20.5	20.8	20.2	20.6	20.5	20.9	21.2
	6H	20.0	20.4	20.4	20.7	21.1	20.6	21.0	21.0	21.4	21.7
	8H	20.0	20.4	20.4	20.8	21.2	20.7	21.1	21.1	21.5	21.9
	12H	20.0	20.4	20.4	20.7	21.1	20.8	21.1	21.2	21.5	21.9
8H	4H	19.9	20.2	20.3	20.6	21.0	20.3	20.7	20.7	21.0	21.4
	6H	20.2	20.5	20.7	20.9	21.4	20.8	21.1	21.3	21.5	22.0
	8H	20.3	20.6	20.8	21.0	21.5	21.0	21.3	21.4	21.7	22.1
	12H	20.3	20.5	20.8	21.0	21.5	21.1	21.3	21.6	21.8	22.2
12H	4H	19.8	20.2	20.3	20.6	21.0	20.3	20.6	20.7	21.0	21.4
	6H	20.2	20.5	20.7	20.9	21.4	20.8	21.1	21.3	21.5	22.0
	8H	20.3	20.6	20.8	21.0	21.5	21.0	21.2	21.5	21.7	22.2
Variations with the observer position at spacings(CIE Pub.117):											
S = 1.0H	+ 0.3 / - 0.4					+ 0.2 / - 0.2					
1.5H	+ 0.2 / - 0.2					+ 0.2 / - 0.2					
2.0H	+ 0.7 / - 0.6					+ 0.6 / - 0.5					

CIE Pub.117, 349.3 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -3.7)
Area: 0.0004 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:VJC008
Test Date:2023-07-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:7.580m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:220.66V I:0.0544A P:6.9700W PF:0.5810 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:349.294x1 lm		
NAME: DL3811 3000K RA90 15D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 22	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	89	83	79	88	83	79	87	82	79	75
0.80	96	90	87	95	90	87	94	89	86	83
1.00	100	95	91	99	94	91	97	94	90	86
1.25	104	99	95	103	98	95	101	97	94	90
1.50	106	102	98	105	101	98	103	99	97	92
2.00	109	105	102	107	104	101	104	101	99	94
2.50	110	107	104	109	105	103	105	103	101	95
3.00	112	109	106	110	107	105	107	104	102	96
4.00	114	111	109	112	109	108	108	106	105	97
5.00	115	113	111	113	111	109	109	107	106	99
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3℃
Operators: VJC008
Test Date: 2023-07-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity: 65.0%
Test Distance: 7.580m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.66V I:0.0544A P:6.9700W PF:0.5810 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:349.294x1 lm		
NAME: DL3811 3000K RA90 15D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 22	Shielding Angle:

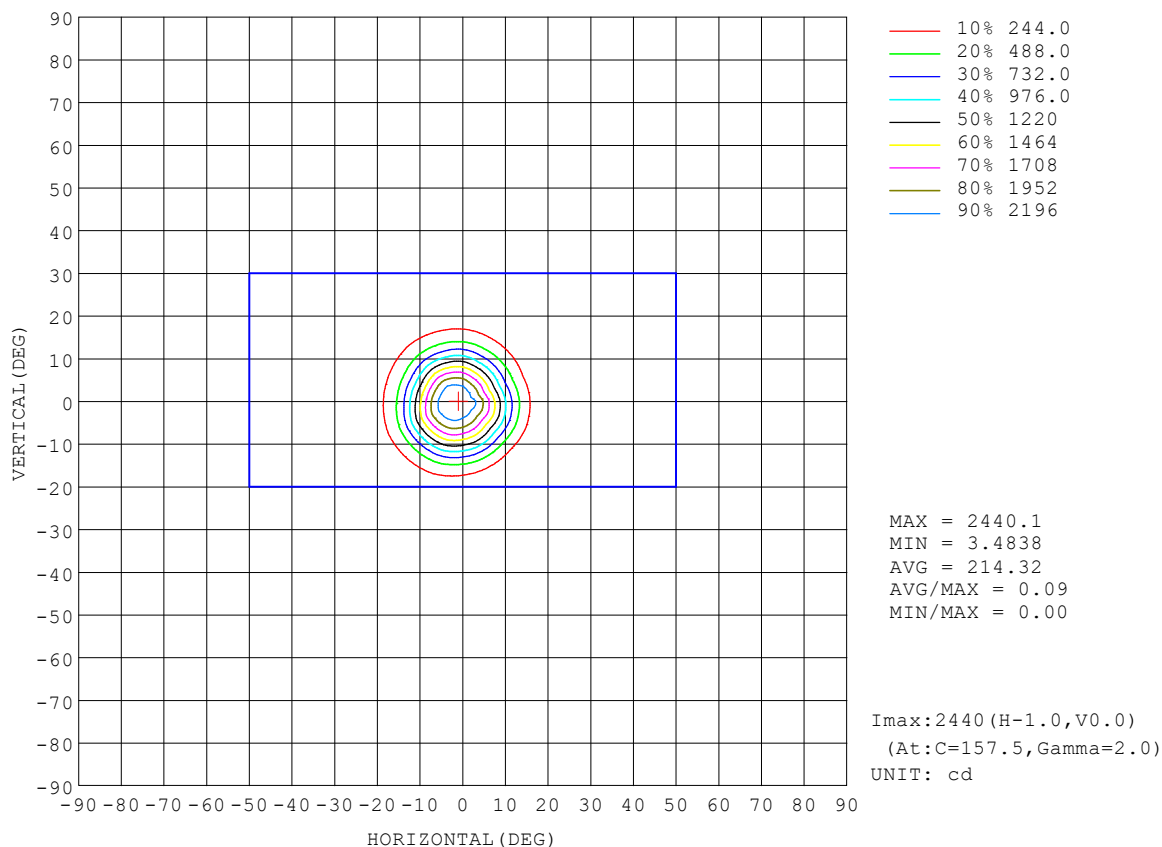


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:VJC008
Test Date:2023-07-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:7.580m [K=1.0000]
Remarks:

AAI Figure

Test:U:220.66V I:0.0544A P:6.9700W PF:0.5810 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:349.294x1 lm		
NAME: DL3811 3000K RA90 15D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 22	Shielding Angle:

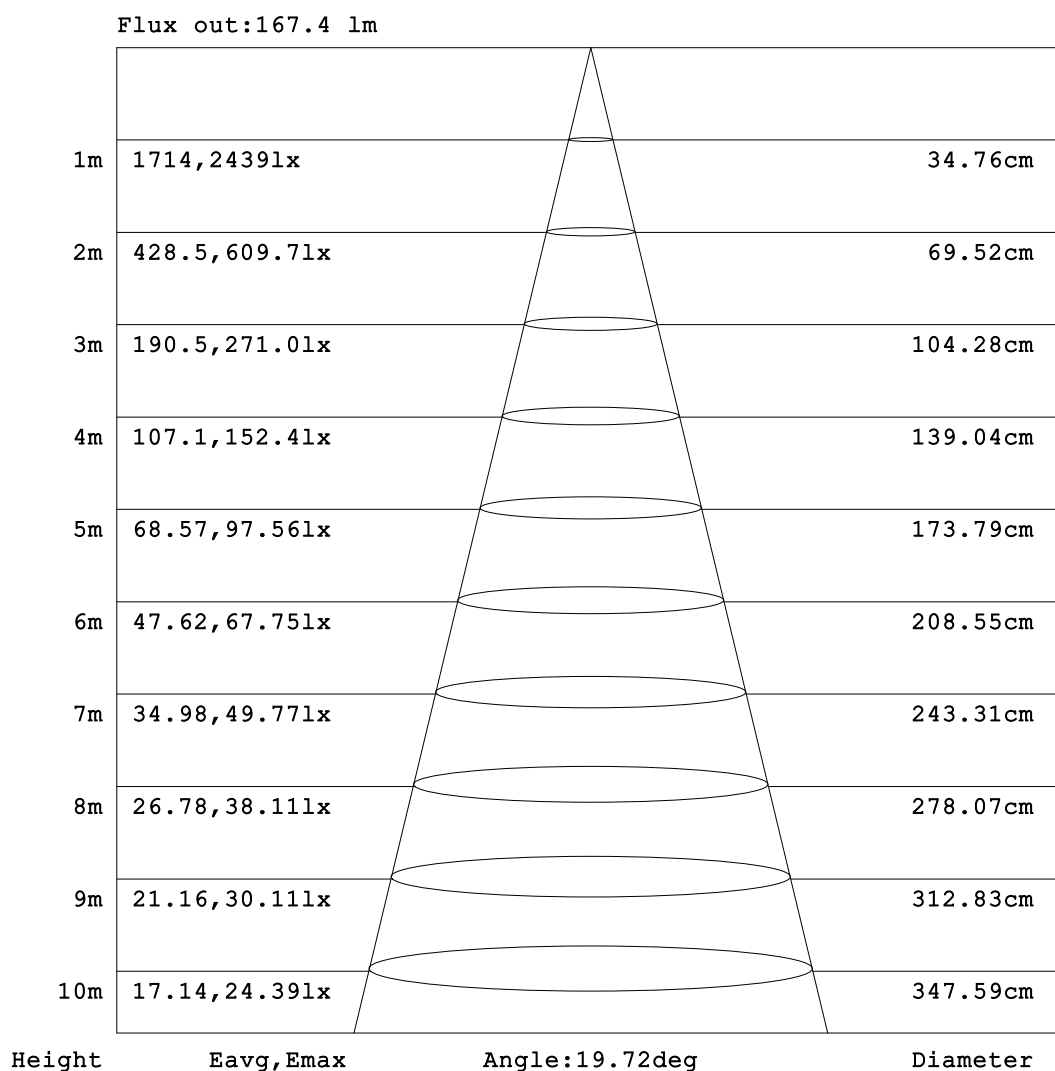


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:VJC008
Test Date:2023-07-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:7.580m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:220.66V I:0.0544A P:6.9700W PF:0.5810 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:349.294x1 lm		
NAME: DL3811 3000K RA90 15D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 22	Shielding Angle:

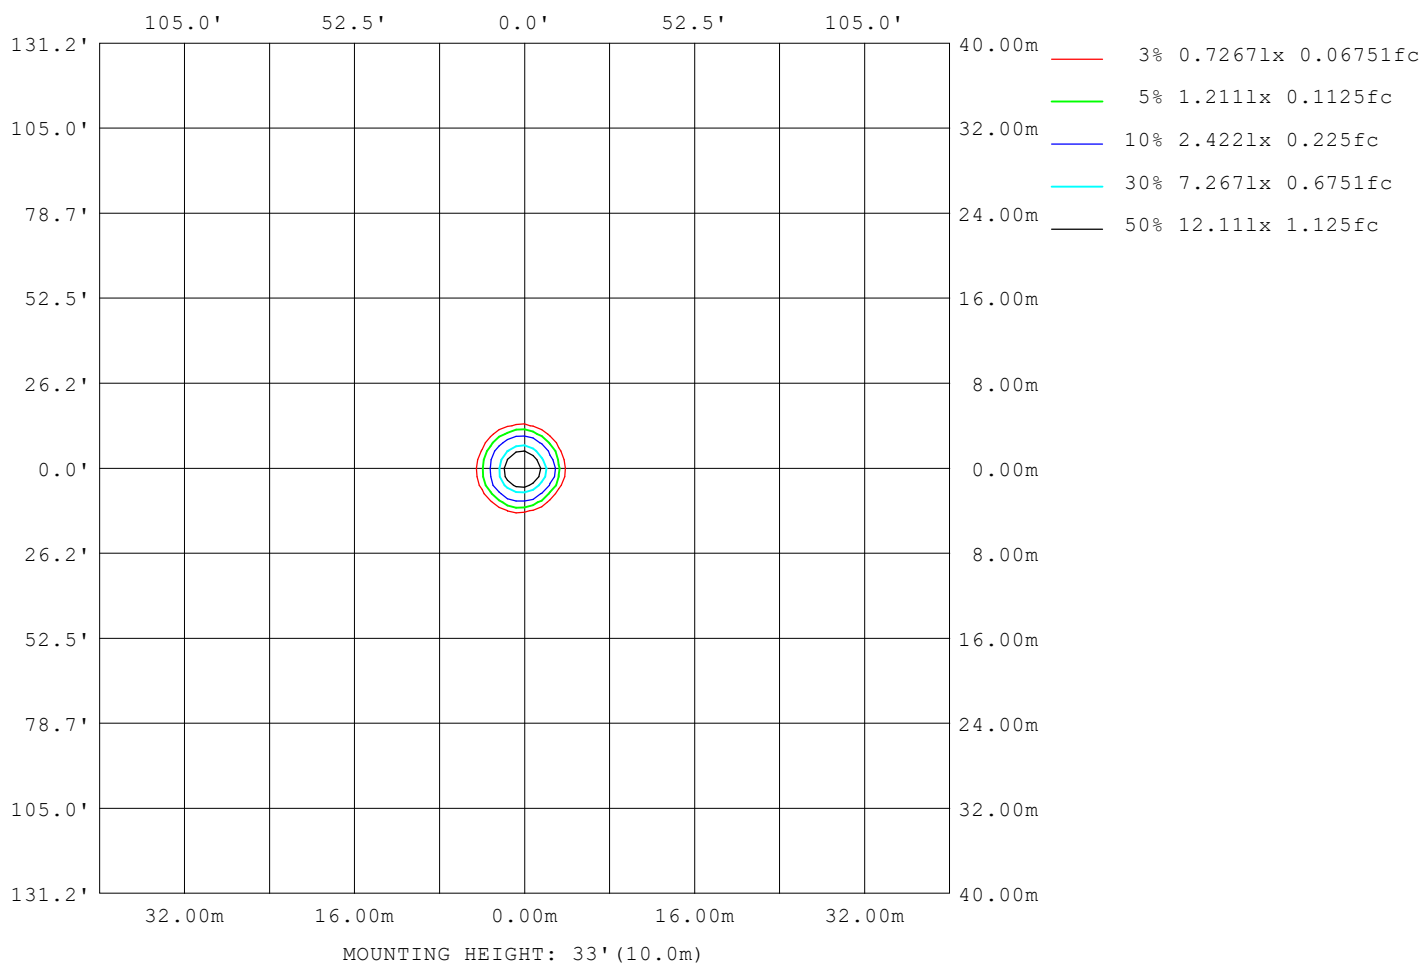

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: VJC008
Test Date: 2023-07-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity: 65.0%
Test Distance: 7.580m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:220.66V I:0.0544A P:6.9700W PF:0.5810 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:349.294x1 lm		
NAME: DL3811 3000K RA90 15D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 22	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	15968
L_0~180 (75) av	13064
L_0~180 (85) av	6704
L_90~270 (65) av	15857
L_90~270 (75) av	13118
L_90~270 (85) av	6542
L_45 (65) av	15952
L_45 (75) av	13083
L_45 (85) av	6586

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:VJC008
Test Date:2023-07-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:7.580m [K=1.0000]
Remarks:

Planar Illuminance Curve

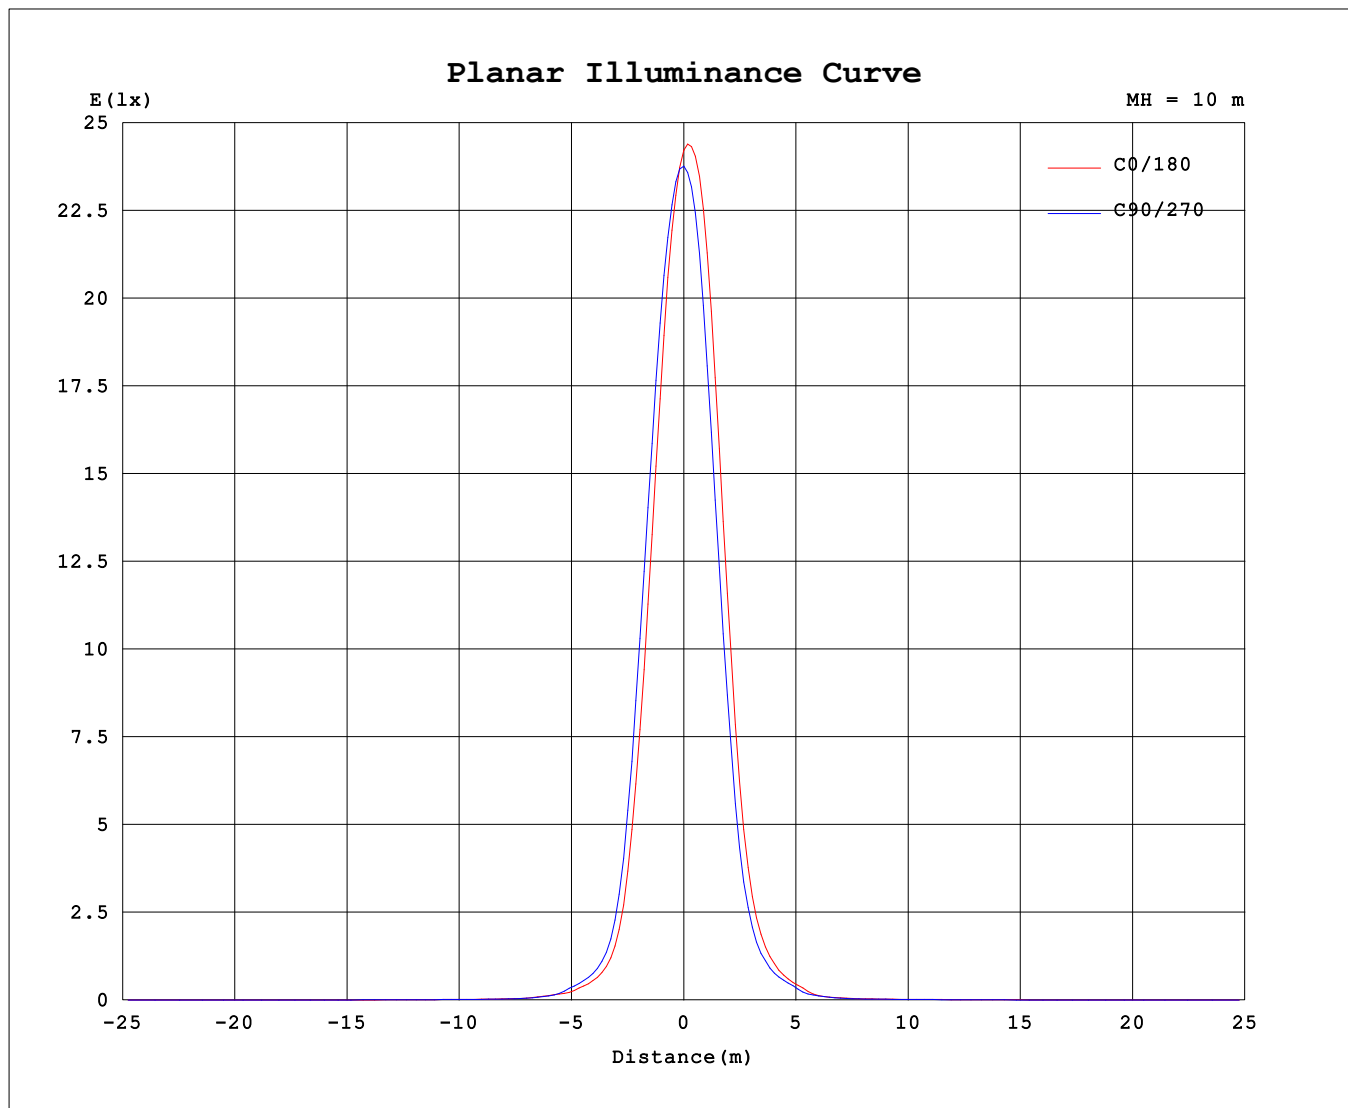

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3 °C
Operators: VJC008
Test Date: 2023-07-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity: 65.0%
Test Distance: 7.580m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.66V I:0.0544A P:6.9700W PF:0.5810 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:349.294x1 lm		
NAME: DL3811 3000K RA90 15D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 22	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	2383	2383	2383	2383	2383	2383	2383	2383	2383	2383	2383	2383	2383	2383	2383	2383			
5	1885	1930	1924	2013	2094	2205	2267	2318	2244	2199	2196	2090	2008	1895	1842	1806			
10	970	1045	1046	1176	1282	1432	1496	1561	1405	1305	1305	1176	1096	963	912	870			
15	296	319	310	371	450	557	610	635	531	485	483	419	375	323	291	262			
20	93.6	95.2	92.8	111	134	166	181	197	180	171	167	146	136	113	102	92.5			
25	46.0	44.8	46.6	54.9	64.2	74.6	78.4	86.3	79.8	75.2	75.2	68.2	65.7	51.1	50.8	47.7			
30	23.7	22.8	19.8	21.0	22.8	25.3	26.3	31.9	26.3	22.9	24.9	21.9	23.4	18.5	22.9	22.6			
35	11.4	11.4	9.74	10.0	10.8	11.0	10.2	11.9	11.7	11.7	12.8	11.5	10.8	9.80	10.05	10.10			
40	7.29	7.30	7.02	6.96	6.92	6.68	6.80	7.33	8.09	8.32	8.11	7.56	7.30	7.05	7.21	7.19			
45	6.07	6.10	6.03	6.05	6.07	6.02	6.23	6.50	6.70	6.71	6.84	6.68	6.36	6.11	6.19	6.09			
50	5.22	5.30	5.41	5.49	5.64	5.83	6.06	6.25	6.42	6.35	6.40	6.14	5.88	5.47	5.27	5.10			
55	4.09	4.19	4.28	4.56	4.85	5.19	5.49	5.67	5.73	5.63	5.58	5.21	4.86	4.34	4.10	3.90			
60	3.01	3.05	3.12	3.29	3.49	3.74	3.95	4.13	3.98	3.88	3.82	3.60	3.40	3.19	3.03	2.94			
65	2.32	2.36	2.43	2.57	2.74	2.93	3.09	3.17	3.08	3.00	2.95	2.78	2.62	2.46	2.32	2.24			
70	1.70	1.73	1.79	1.90	2.05	2.21	2.33	2.40	2.30	2.23	2.18	2.05	1.93	1.81	1.69	1.62			
75	1.11	1.15	1.19	1.29	1.42	1.55	1.65	1.69	1.59	1.53	1.49	1.39	1.29	1.19	1.09	1.04			
80	0.58	0.61	0.65	0.73	0.84	0.93	1.02	1.05	0.96	0.91	0.87	0.79	0.71	0.63	0.55	0.51			
85	0.08	0.10	0.13	0.20	0.29	0.37	0.45	0.47	0.38	0.35	0.31	0.25	0.16	0.09	0.03	0.04			
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
110	0.00	0.02	0.00	0.02	0.00	0.01	0.00	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
115	0.03	0.04	0.02	0.04	0.02	0.03	0.01	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.01	0.00			
120	0.04	0.07	0.04	0.06	0.04	0.06	0.03	0.06	0.02	0.00	0.02	0.00	0.02	0.00	0.03	0.00			
125	0.06	0.07	0.05	0.07	0.05	0.07	0.05	0.07	0.04	0.02	0.04	0.02	0.05	0.04	0.07	0.05			
130	0.07	0.09	0.07	0.08	0.06	0.08	0.06	0.08	0.11	0.08	0.11	0.10	0.14	0.14	0.19	0.17			
135	0.13	0.14	0.12	0.13	0.10	0.11	0.08	0.10	0.28	0.27	0.30	0.31	0.37	0.41	0.46	0.47			
140	0.31	0.31	0.29	0.27	0.23	0.22	0.18	0.19	0.65	0.66	0.68	0.72	0.79	0.86	0.93	0.95			
145	0.71	0.68	0.67	0.62	0.56	0.52	0.47	0.47	1.18	1.19	1.22	1.27	1.35	1.43	1.49	1.52			
150	1.25	1.22	1.21	1.15	1.07	1.01	0.95	0.94	1.72	1.73	1.76	1.80	1.87	1.91	1.97	1.99			
155	1.79	1.77	1.76	1.71	1.63	1.58	1.52	1.52	2.12	2.11	2.15	2.16	2.21	2.22	2.26	2.26			
160	2.11	2.12	2.10	2.10	2.05	2.03	1.98	2.00	2.32	2.29	2.34	2.32	2.35	2.33	2.31	2.32			
165	2.13	2.11	2.17	2.16	2.18	2.17	2.17	2.18	2.30	2.31	2.31	2.33	2.29	2.26	2.18	2.17			
170	1.84	1.84	1.88	1.93	1.99	2.02	2.04	2.05	2.06	2.08	2.07	2.06	1.99	1.93	1.84	1.82			
175	1.46	1.47	1.53	1.54	1.59	1.63	1.71	1.70	1.65	1.68	1.70	1.67	1.59	1.56	1.48	1.44			
180	1.37	1.39	1.44	1.43	1.43	1.43	1.45	1.40	1.40	1.40	1.44	1.43	1.43	1.42	1.43	1.38			

C Range: 0 - 360DEG

C Interval: 22.5DEG

Test Speed: HIGH

Temperature:25.3℃

Operators:VJC008

Test Date:2023-07-27

γ Range: 0 - 180DEG

γ Interval: 1.0DEG

Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456

Humidity:65.0%

Test Distance:7.580m [K=1.0000]

Remarks: