

SD3276

9W Danny Surface Mounted Downlight

Description

Downlight for indoor use;
BJB solder-free easy to change LED Chip;
Nice lens Design;
High lumen;

Finish

Powder Coat/Liquid Paint/
Anodize/Plating

Material

Aluminium



18D

24D

36D

55D

TECHNICAL CHARACTERISTICS

Light source


Light source: Citizen CLU02Q-1202
Output (W): 8.3W (230mA 36V)
Total power consumption (W): 9W
Color temperature: 2700K/3000K/4000K
CRI: >93/97
Photobiological risk: RG1
Real Lumen: 785lm (2700K)
Qty Leds: 1
Lm/Real W: 87lm
Life Time: 50.000h L90B10
MacAdam steps:
UGR: <15

Gear

This product is supplied with gear.
With Built-in ACTEC traic dimmable driver
MINI-10-230T

Luminaire

Crossing: No
Warranty: 5 Years

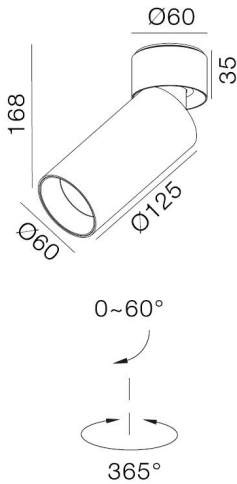

LIGHT DISTRIBUTION for 2700K Middle 36° 9W

h(m)	E(lx)	Ø(m)
1	1283.1	Ø0.61
2	320.41	Ø1.23
3	142.12	Ø1.81
4	83.88	Ø2.46
5	51.36	Ø3.07

The photograph may not match the
reference exactly. Please read the
product description to identify the finish.