

Product Description: 3W Mini Adjustable LED Downlight
Model: DL3331



Technical Data

Light source	Osram SSL150
System wattage	3W (700mA, 3V)
Lumen flux	180lm (3W,36D, 3000K, Ra.90)
Colour temperature	2700K, 3000K, 4000K
Colour rendering index	Ra≥90
Chromaticity rate	3 MacAdam
Beam angle	24D/36D/60D, Lens Type
Service lifetime	50,000hrs, L70
Ingress protection	IP21 Installed
Operation voltage	220-240Vac, 50/60Hz
Operation temperature	-20~40D
Protection class	III
Finishing	White RAL9003, Gloss 5 Black RAL9005, Gloss 5
Construction	Aluminum
Mounting	Ceiling Recessed, Spring type
Warranty	5 years
Lighting control	Tridonic non-dim, ECG standard Actec triac dim 0-10V, Dali dimming upon request

+

Ordering Data

DL3331					
Model	Finish	Power	CCT	CRI	Beam
	• AW	• 3	• 27	• R80	• 24D
	• AB		• 30	• R90	• 36D
			• 40		• 60D

Features


- Easy to maintenance

+

Accessories

- NA

Diagram

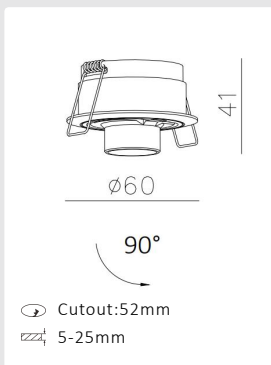

+