


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:3.0000V I:0.6993A P:3.0000W PF:0.0010 Freq:49.96Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:112.04x1 lm		
NAME: DL3367 2700K RA90	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 12	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 37.35 lm/W			
MODEL	DL3367 2700K RA90	I _{max} (cd)	344.3	S/MH(C0/180)	0.44
NOMINAL POWER(W)	3	LOR(%)	100.0	S/MH(C90/270)	0.58
RATED VOLTAGE(V)	3	TOTAL FLUX(lm)	112.04	η UP,DN(C0-180)	0.4,43.6
NOMINAL FLUX(lm)	112.04	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.4,55.6
LAMPS INSIDE	1	η up(%)	0.8	CIBSE SHR NOM	0.50
TEST VOLTAGE(V)	3	η down(%)	99.2	CIBSE SHR MAX	0.50

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

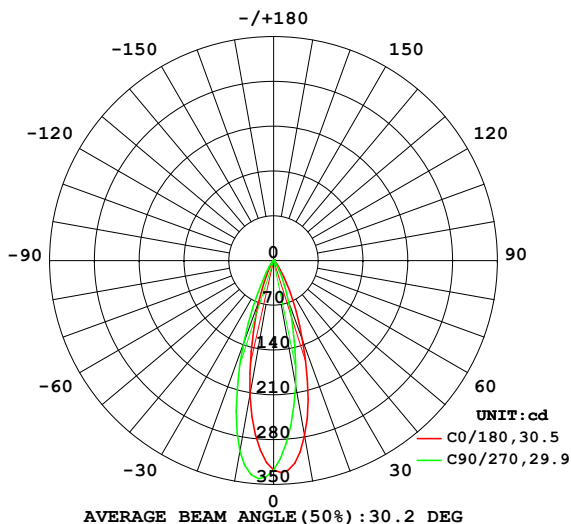

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

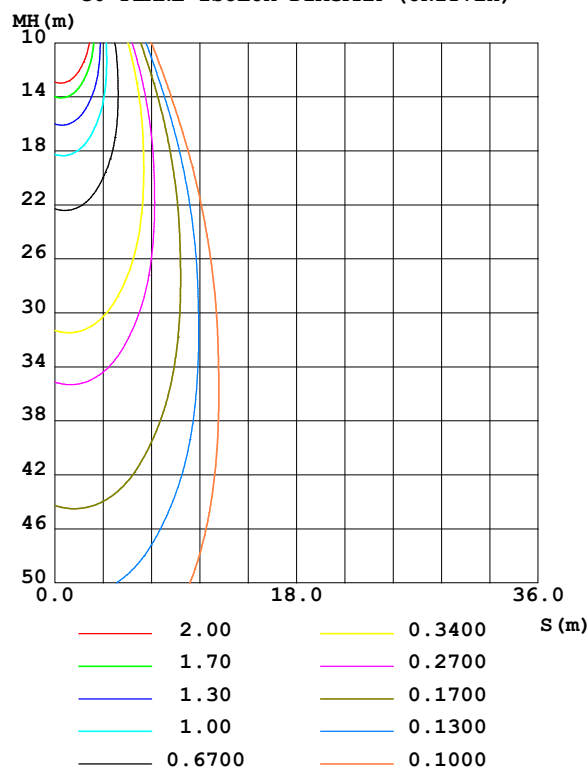

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3 °C
Operators: 001
Test Date: 2024-09-14

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity: 65.0%
Test Distance: 8.370m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	278.6	230.8	199.0	190.3	213.7	261.3	303.3	312.4	0- 10	27.35	27.35	24.4, 24.4
20	132.8	94.16	69.56	59.06	68.01	99.84	136.7	157.2	10- 20	46.93	74.27	66.3, 66.3
30	40.48	26.62	17.55	12.89	13.59	19.36	29.87	42.10	20- 30	25.32	99.60	88.9, 88.9
40	10.34	7.160	4.860	3.419	3.428	4.381	6.786	9.971	30- 40	8.287	107.9	96.3, 96.3
50	2.491	1.740	1.080	0.8323	0.8538	1.138	1.649	2.351	40- 50	2.635	110.5	98.6, 98.6
60	0.3003	0.1857	0.1621	0.1320	0.1033	0.1102	0.1447	0.3156	50- 60	0.5846	111.1	99.2, 99.2
70	0.0029	0.0001	0.0113	0.0113	0	0	0	0	60- 70	0.0597	111.2	99.2, 99.2
80	0	0	0	0	0	0	0	0	70- 80	0.0002	111.2	99.2, 99.2
90	0	0	0	0	0	0	0	0	80- 90	0	111.2	99.2, 99.2
100	0	0	0	0	0	0	0	0	90-100	0	111.2	99.2, 99.2
110	0	0	0	0	0	0	0	0	100-110	0	111.2	99.2, 99.2
120	0	0	0	0	0.0164	0.0001	0	0	110-120	0.0003	111.2	99.2, 99.2
130	0.0217	0.0605	0.1114	0.1344	0.1501	0.0995	0.0532	0.0310	120-130	0.0276	111.2	99.2, 99.2
140	0.2014	0.2701	0.3401	0.3587	0.3627	0.2956	0.2262	0.1909	130-140	0.1331	111.3	99.4, 99.4
150	0.4330	0.4938	0.5467	0.5523	0.5804	0.5300	0.4634	0.4181	140-150	0.2443	111.6	99.6, 99.6
160	0.5775	0.5823	0.6026	0.5917	0.6102	0.6126	0.6138	0.5861	150-160	0.2582	111.8	99.8, 99.8
170	0.5695	0.5355	0.5107	0.5105	0.5067	0.5491	0.5690	0.5664	160-170	0.1635	112.0	100, 100
180	0.4986	0.4995	0.4854	0.4935	0.4986	0.4995	0.5022	0.5076	170-180	0.0495	112.0	100, 100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 109.82 lm

%lum = 98.0%

%lamp = 98.0%

Conical surface Flux(130deg): 111.16 lm

%lum = 99.2%


%lamp = 99.2%

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:001
Test Date:2024-09-14

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:8.370m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:3.0000V I:0.6993A P:3.0000W PF:0.0010 Freq:49.96Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:112.04x1 lm		
NAME: DL3367 2700K RA90	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 12	Shielding Angle:

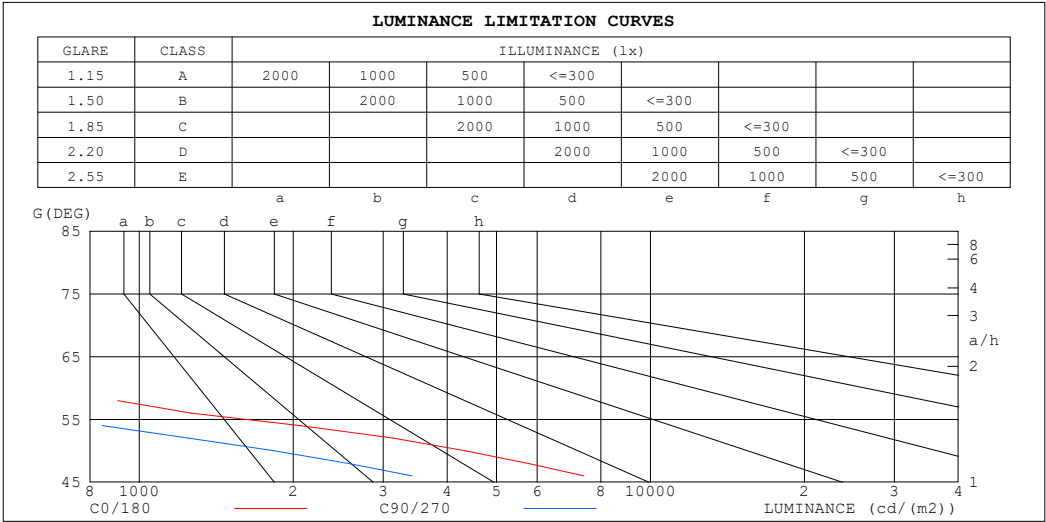

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	0	0
80	0	0
75	0	0
70	9	36
65	297	232
60	674	355
55	2113	866
50	4348	1841
45	9560	4461


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:001
Test Date:2024-09-14

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:8.370m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:3.0000V I:0.6993A P:3.0000W PF:0.0010 Freq:49.96Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:112.04x1 lm		
NAME: DL3367 2700K RA90	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 12	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

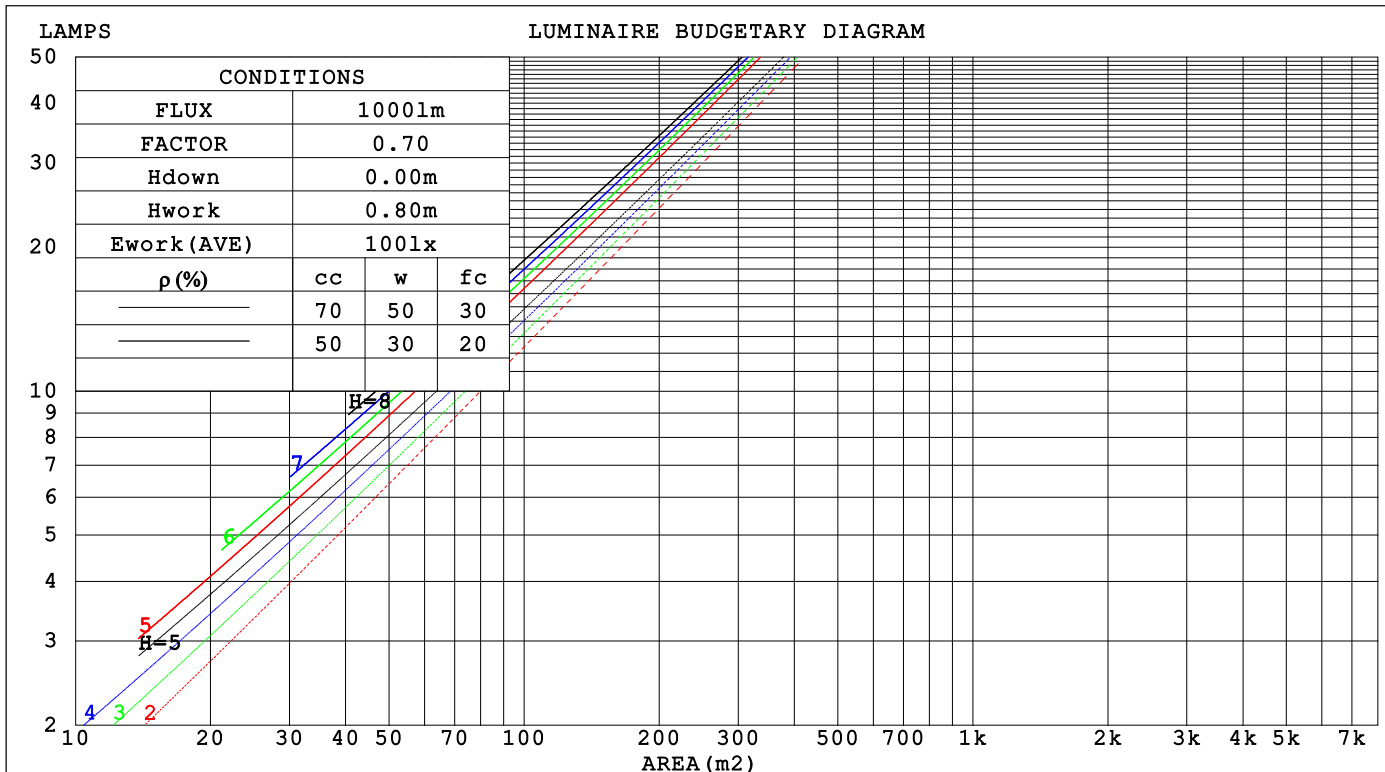

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:001
Test Date:2024-09-14

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:8.370m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:3.0000V I:0.6993A P:3.0000W PF:0.0010 Freq:49.96Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:112.04x1 lm		
NAME: DL3367 2700K RA90	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 12	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.150	.086	.027	.144	.082	.026	.131	.075	.024	.119	.069	.022	.108	.063	.020		
2.0	.141	.077	.024	.136	.075	.023	.125	.069	.022	.115	.064	.020	.106	.060	.019		
3.0	.133	.071	.021	.128	.069	.021	.119	.065	.020	.111	.061	.019	.103	.057	.018		
4.0	.126	.065	.019	.121	.064	.019	.114	.060	.018	.107	.057	.017	.100	.054	.017		
5.0	.119	.061	.018	.115	.059	.017	.109	.057	.017	.103	.054	.016	.097	.052	.016		
6.0	.113	.057	.016	.110	.056	.016	.104	.053	.016	.099	.051	.015	.094	.049	.015		
7.0	.108	.053	.015	.105	.052	.015	.100	.051	.015	.095	.049	.014	.091	.047	.014		
8.0	.103	.050	.014	.101	.050	.014	.096	.048	.014	.092	.047	.013	.088	.045	.013		
9.0	.099	.048	.013	.097	.047	.013	.093	.046	.013	.089	.045	.013	.085	.043	.013		
10.0	.095	.045	.013	.093	.045	.013	.089	.044	.012	.086	.043	.012	.083	.042	.012		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)										
0.0	.196	.196	.196	.168	.168	.168	.115	.115	.115	.066	.066	.066	.021	.021	.021		
1.0	.175	.164	.153	.150	.140	.132	.103	.097	.091	.059	.056	.053	.019	.018	.017		
2.0	.158	.139	.122	.136	.119	.106	.093	.083	.074	.054	.048	.043	.017	.016	.014		
3.0	.144	.119	.100	.124	.103	.086	.085	.072	.061	.049	.042	.036	.016	.014	.012		
4.0	.132	.104	.083	.114	.090	.072	.078	.063	.051	.045	.037	.030	.015	.012	.010		
5.0	.123	.092	.070	.105	.080	.061	.073	.056	.043	.042	.033	.025	.014	.011	.008		
6.0	.114	.083	.060	.098	.072	.052	.068	.050	.037	.039	.029	.022	.013	.010	.007		
7.0	.107	.075	.052	.092	.065	.045	.064	.045	.032	.037	.027	.019	.012	.009	.006		
8.0	.101	.068	.045	.087	.059	.040	.060	.041	.028	.035	.024	.017	.011	.008	.006		
9.0	.096	.063	.040	.082	.054	.035	.057	.038	.025	.033	.023	.015	.011	.007	.005		
10.0	.091	.058	.036	.078	.050	.031	.054	.035	.022	.032	.021	.013	.010	.007	.004		

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:001
Test Date:2024-09-14

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:8.370m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:3.0000V I:0.6993A P:3.0000W PF:0.0010 Freq:49.96Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:112.04x1 lm										
NAME: DL3367 2700K RA90					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: VJC Lighting					SUR.: 12			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	20.3	21.1	20.5	21.2	21.4	16.8	17.6	17.0	17.7	17.9
3H	20.2	20.9	20.4	21.1	21.3	16.7	17.4	16.9	17.6	17.8
4H	20.1	20.7	20.4	21.0	21.2	16.6	17.2	16.9	17.5	17.7
6H	20.0	20.6	20.3	20.9	21.1	16.5	17.1	16.8	17.4	17.6
8H	19.9	20.5	20.3	20.8	21.1	16.4	17.0	16.8	17.3	17.6
12H	19.9	20.5	20.2	20.7	21.0	16.4	17.0	16.7	17.2	17.5
4H 2H	20.1	20.7	20.4	21.0	21.2	16.6	17.3	16.9	17.5	17.7
3H	19.9	20.5	20.2	20.8	21.0	16.4	17.0	16.7	17.3	17.6
4H	19.8	20.3	20.2	20.6	21.0	16.3	16.8	16.7	17.2	17.5
6H	19.7	20.2	20.1	20.5	20.9	16.2	16.7	16.6	17.0	17.4
8H	19.7	20.1	20.1	20.4	20.8	16.2	16.6	16.6	17.0	17.3
12H	19.6	20.0	20.0	20.4	20.8	16.1	16.5	16.5	16.9	17.3
8H 4H	19.7	20.1	20.1	20.4	20.8	16.2	16.6	16.6	17.0	17.3
6H	19.5	19.9	20.0	20.3	20.7	16.1	16.4	16.5	16.8	17.2
8H	19.5	19.8	19.9	20.2	20.7	16.0	16.3	16.5	16.7	17.2
12H	19.4	19.7	19.9	20.1	20.6	15.9	16.2	16.4	16.7	17.1
12H 4H	19.6	20.0	20.0	20.4	20.8	16.1	16.5	16.5	16.9	17.3
6H	19.5	19.8	19.9	20.2	20.7	16.0	16.3	16.5	16.7	17.2
8H	19.4	19.7	19.9	20.1	20.6	15.9	16.2	16.4	16.7	17.1
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 3.8 / -13.3					+ 2.6 / -14.1				
1.5H	+ 5.5 / -10.8					+ 3.9 / - 8.8				
2.0H	+ 6.9 / -15.0					+ 6.1 / -12.0				

CIE Pub.117, 112.0 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -7.6)
Area: 0.000907 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:001
Test Date:2024-09-14

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:8.370m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:3.0000V I:0.6993A P:3.0000W PF:0.0010 Freq:49.96Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:112.04x1 lm		
NAME: DL3367 2700K RA90	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 12	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	89	83	80	89	83	80	88	83	79	76
0.80	96	91	87	96	91	87	95	90	87	83
1.00	100	95	92	100	95	92	98	94	91	87
1.25	104	99	96	103	99	96	101	98	95	91
1.50	107	102	99	106	102	99	103	100	98	93
2.00	109	105	102	108	104	101	105	102	100	95
2.50	111	107	104	109	106	103	106	103	101	95
3.00	112	109	106	110	107	105	107	105	103	96
4.00	114	111	109	112	110	108	108	107	105	98
5.00	115	113	111	113	111	110	109	108	107	99
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3 °C
Operators: 001
Test Date: 2024-09-14

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity: 65.0%
Test Distance: 8.370m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:3.0000V I:0.6993A P:3.0000W PF:0.0010 Freq:49.96Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:112.04x1 lm		
NAME: DL3367 2700K RA90	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 12	Shielding Angle:

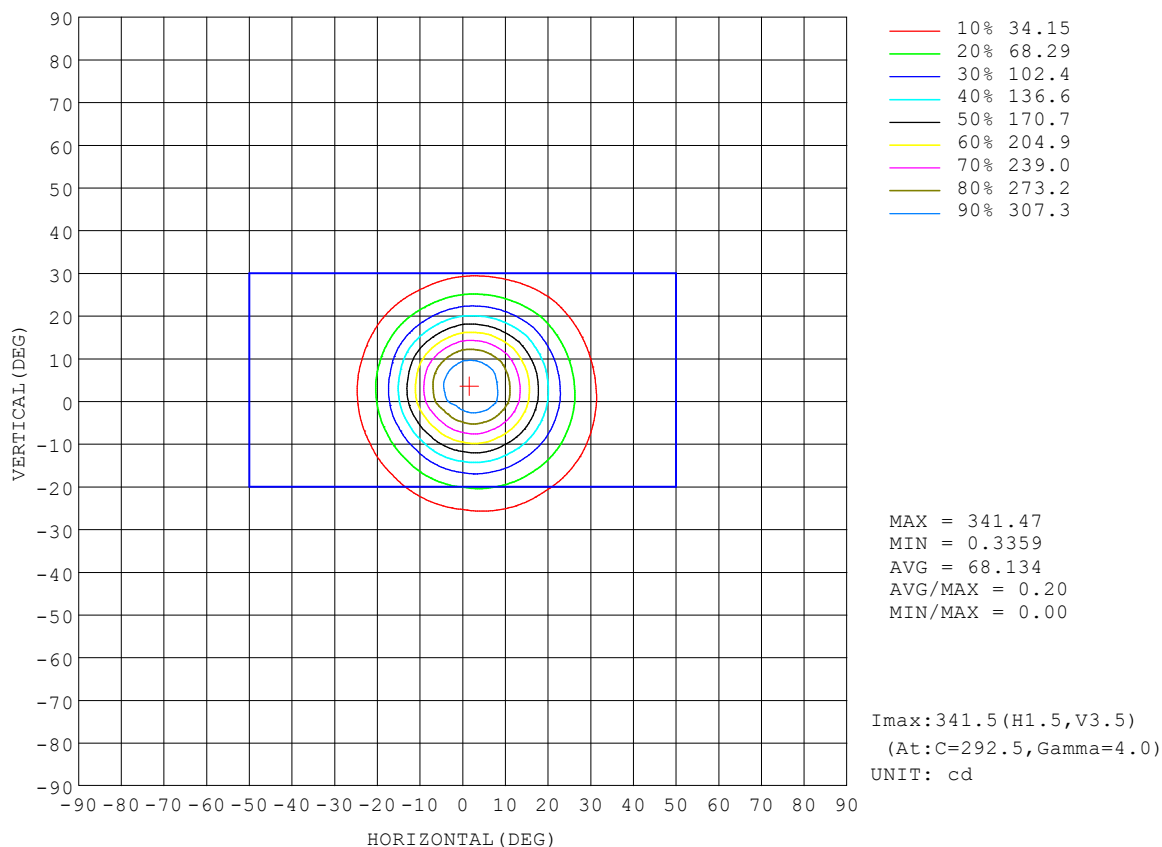


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:001
Test Date:2024-09-14

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:8.370m [K=1.0000]
Remarks:

AAI Figure

Test:U:3.0000V I:0.6993A P:3.0000W PF:0.0010 Freq:49.96Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:112.04x1 lm		
NAME: DL3367 2700K RA90	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 12	Shielding Angle:

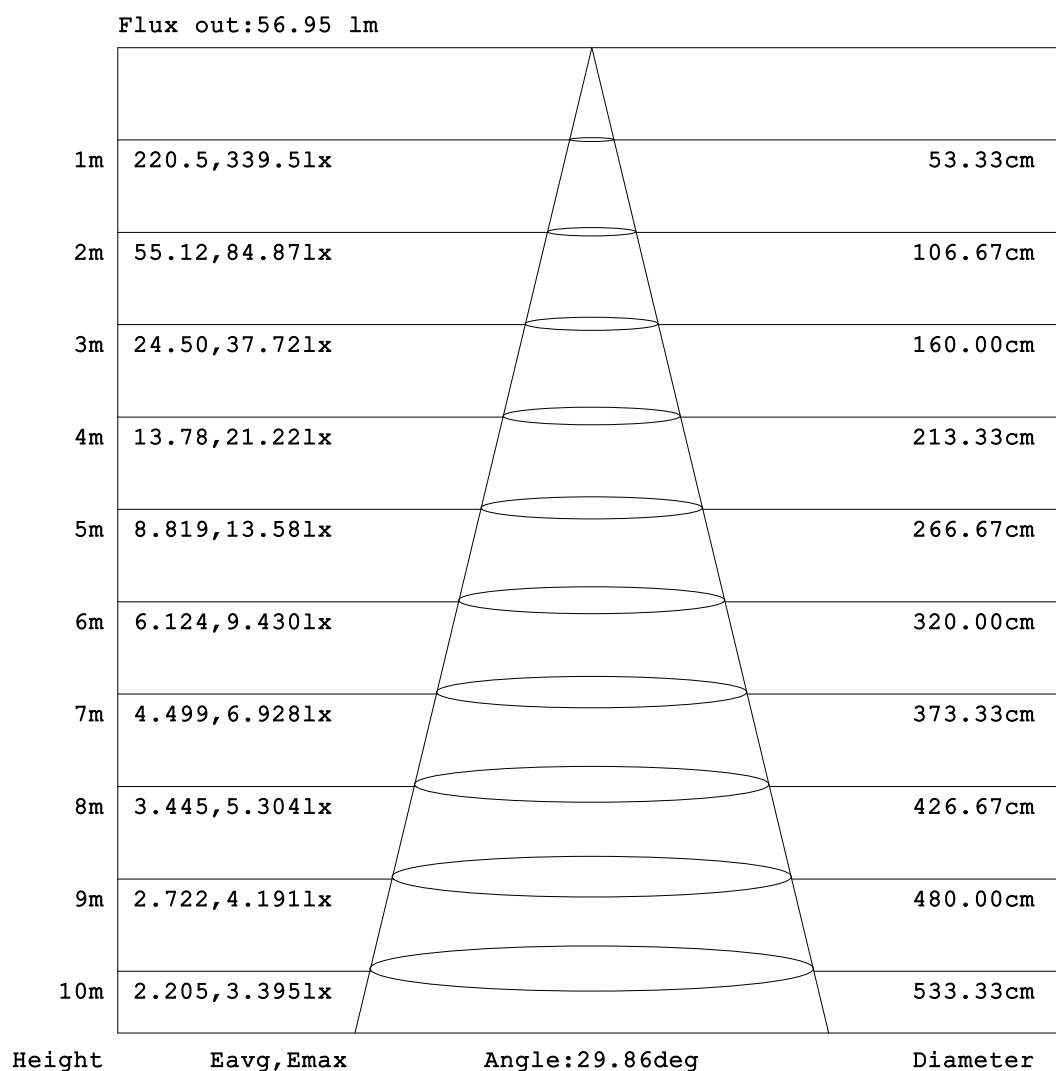


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:001
Test Date:2024-09-14

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:8.370m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:3.0000V I:0.6993A P:3.0000W PF:0.0010 Freq:49.96Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:112.04x1 lm		
NAME: DL3367 2700K RA90	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 12	Shielding Angle:

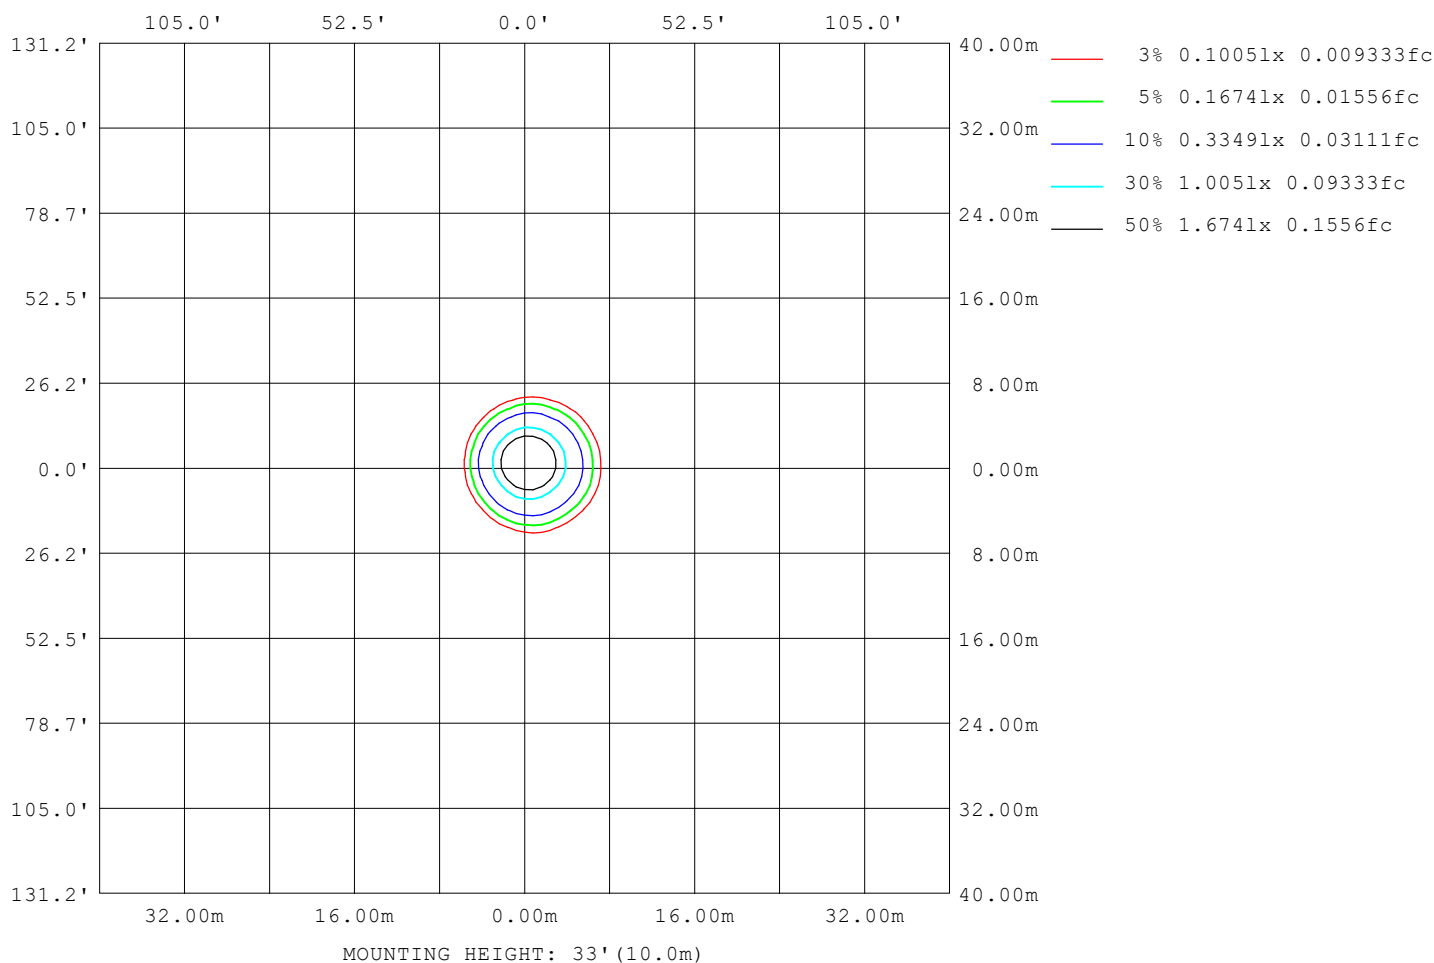

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: 001
Test Date: 2024-09-14

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity: 65.0%
Test Distance: 8.370m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:3.0000V I:0.6993A P:3.0000W PF:0.0010 Freq:49.96Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:112.04x1 lm		
NAME: DL3367 2700K RA90	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 12	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	163
L_0~180 (75) av	0
L_0~180 (85) av	0
L_90~270 (65) av	96
L_90~270 (75) av	0
L_90~270 (85) av	0
L_45 (65) av	143
L_45 (75) av	0
L_45 (85) av	0

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:001
Test Date:2024-09-14

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:8.370m [K=1.0000]
Remarks:

Planar Illuminance Curve

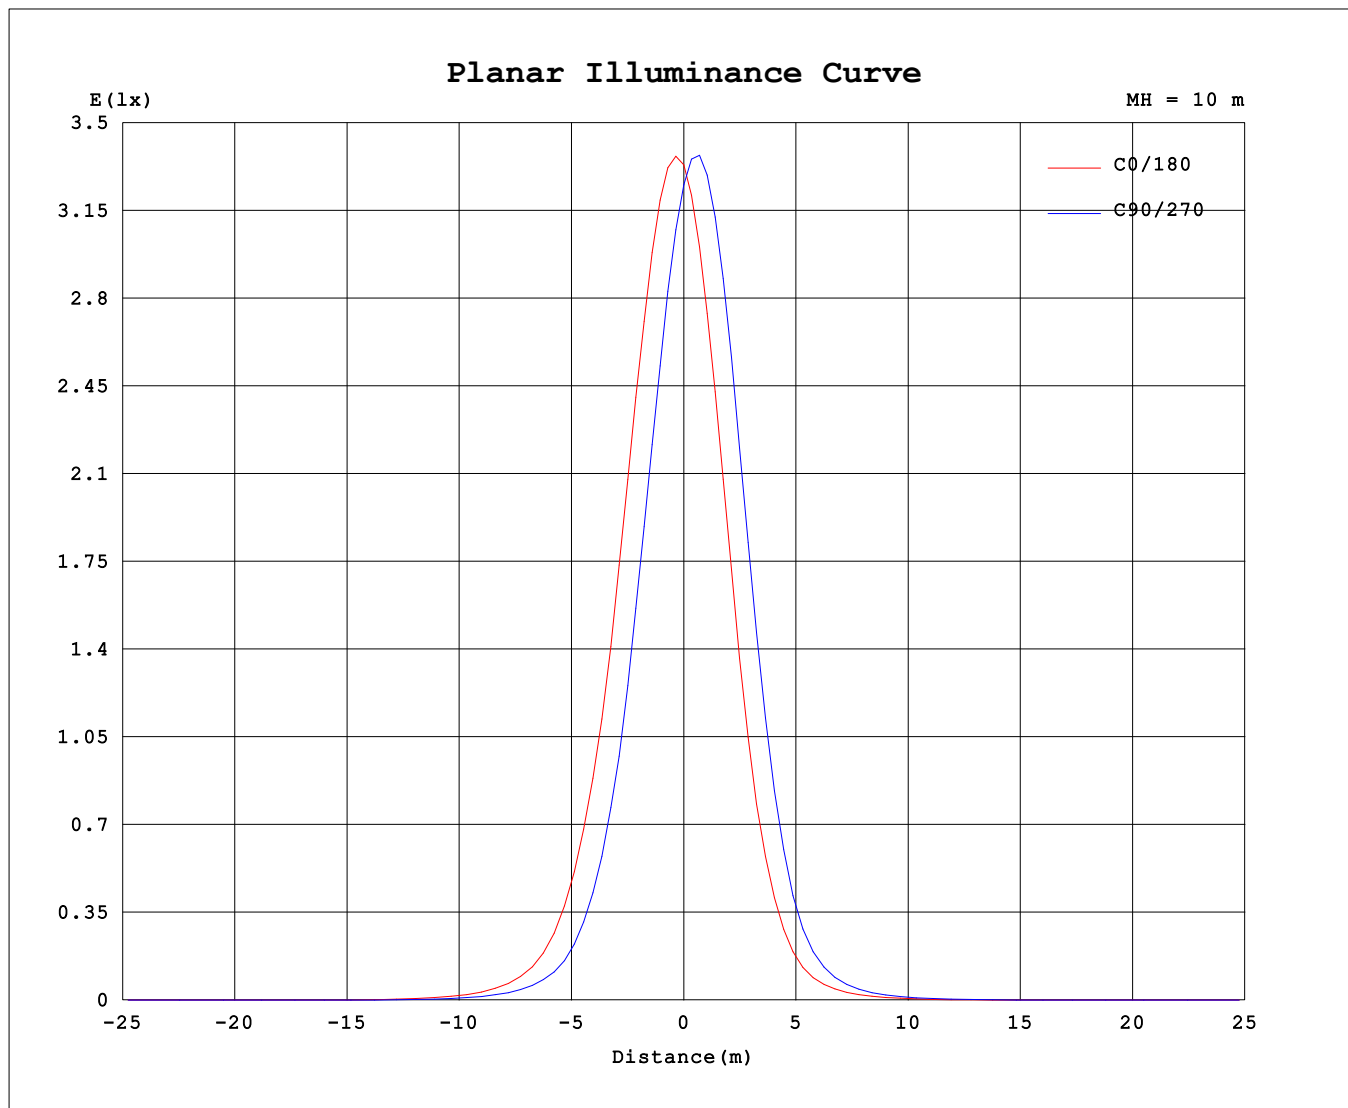

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3 °C
Operators: 001
Test Date: 2024-09-14

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity: 65.0%
Test Distance: 8.370m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:3.0000V I:0.6993A P:3.0000W PF:0.0010 Freq:49.96Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:112.04x1 lm		
NAME: DL3367 2700K RA90	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 12	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	327	327	327	327	327	327	327	327	327	327	327	327	327	327	327	327			
5	329	317	305	294	287	284	284	289	297	309	322	332	342	344	344	337			
10	279	255	231	214	199	192	190	199	214	234	261	283	303	311	312	299			
15	223	198	172	153	138	131	127	133	147	167	196	218	243	255	260	245			
20	133	114	94.2	80.3	69.6	63.7	59.1	60.9	68.0	82.1	99.8	116	137	148	157	150			
25	87.9	75.2	60.5	50.1	41.2	36.5	32.5	33.0	36.5	43.1	54.1	64.6	79.3	90.1	100	97.2			
30	40.5	34.9	26.6	21.9	17.5	14.7	12.9	12.6	13.6	15.6	19.4	23.5	29.9	35.6	42.1	42.4			
35	23.1	20.4	15.6	12.7	10.4	8.68	7.43	7.17	7.71	8.55	10.4	12.8	16.0	19.3	23.1	23.9			
40	10.3	9.18	7.16	5.86	4.86	4.08	3.42	3.26	3.43	3.72	4.38	5.37	6.79	8.26	9.97	10.6			
45	6.02	5.35	4.26	3.52	2.88	2.44	2.10	1.98	2.08	2.27	2.62	3.17	3.95	4.73	5.68	6.07			
50	2.49	2.23	1.74	1.42	1.08	0.91	0.83	0.81	0.85	0.97	1.14	1.39	1.65	1.99	2.35	2.46			
55	1.08	0.91	0.73	0.58	0.45	0.37	0.39	0.37	0.39	0.48	0.57	0.71	0.80	0.98	1.11	1.09			
60	0.30	0.21	0.19	0.14	0.16	0.11	0.13	0.10	0.10	0.14	0.11	0.15	0.14	0.20	0.32	0.32			
65	0.11	0.08	0.11	0.07	0.09	0.05	0.08	0.04	0.04	0.07	0.05	0.02	0.00	0.06	0.06	0.10			
70	0.00	0.00	0.00	0.00	0.01	0.00	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
120	0.00	0.00	0.00	0.00	0.00	0.01	0.00	0.02	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
125	0.00	0.00	0.00	0.03	0.02	0.05	0.03	0.06	0.05	0.01	0.03	0.00	0.00	0.00	0.00	0.00			
130	0.02	0.07	0.06	0.12	0.11	0.16	0.13	0.16	0.15	0.10	0.10	0.05	0.05	0.01	0.03	0.01			
135	0.08	0.13	0.13	0.20	0.20	0.24	0.22	0.24	0.23	0.17	0.17	0.11	0.11	0.06	0.08	0.05			
140	0.20	0.26	0.27	0.33	0.34	0.39	0.36	0.38	0.36	0.31	0.30	0.23	0.23	0.17	0.19	0.16			
145	0.29	0.36	0.36	0.43	0.43	0.48	0.45	0.47	0.46	0.40	0.39	0.33	0.32	0.26	0.28	0.25			
150	0.43	0.49	0.49	0.55	0.55	0.59	0.55	0.57	0.58	0.52	0.53	0.47	0.46	0.40	0.42	0.39			
155	0.51	0.57	0.55	0.59	0.59	0.60	0.59	0.59	0.61	0.59	0.60	0.54	0.55	0.49	0.50	0.47			
160	0.58	0.59	0.58	0.59	0.60	0.58	0.59	0.59	0.61	0.61	0.61	0.61	0.61	0.58	0.59	0.55			
165	0.58	0.58	0.58	0.56	0.58	0.55	0.57	0.55	0.58	0.61	0.61	0.62	0.61	0.60	0.59	0.57			
170	0.57	0.52	0.54	0.50	0.51	0.48	0.51	0.50	0.51	0.56	0.55	0.58	0.57	0.59	0.57	0.57			
175	0.53	0.50	0.50	0.48	0.48	0.48	0.49	0.49	0.49	0.53	0.52	0.55	0.52	0.56	0.54	0.55			
180	0.50	0.50	0.50	0.50	0.49	0.49	0.49	0.49	0.50	0.50	0.50	0.50	0.50	0.51	0.51	0.51			

C Range: 0 - 360DEG

C Interval: 22.5DEG

Test Speed: HIGH

Temperature:25.3℃

Operators:001

Test Date:2024-09-14

γ Range: 0 - 180DEG

γ Interval: 2.0DEG

Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456

Humidity:65.0%

Test Distance:8.370m [K=1.0000]

Remarks: