


## LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:3.0296V I:0.4031A P:1.2204W PF:0.9994 Freq:0Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:67.2623x1 lm		
NAME: DL3766 3000K 24D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 15	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 55.12 lm/W			
MODEL	DL3766 3000K 24D	Imax (cd)	394.5	S/MH(C0/180)	0.34
NOMINAL POWER(W)	1	LOR(%)	100.0	S/MH(C90/270)	0.43
RATED VOLTAGE(V)	3	TOTAL FLUX(lm)	67.262	$\eta$ UP,DN(C0-180)	0.2,40.2
NOMINAL FLUX(lm)	67.2623	CIE CLASS	DIRECT	$\eta$ UP,DN(C180-360)	0.3,59.3
LAMPS INSIDE	1	$\eta$ up (%)	0.6	CIBSE SHR NOM	0.00
TEST VOLTAGE(V)	3	$\eta$ down (%)	99.4	CIBSE SHR MAX	0.30

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

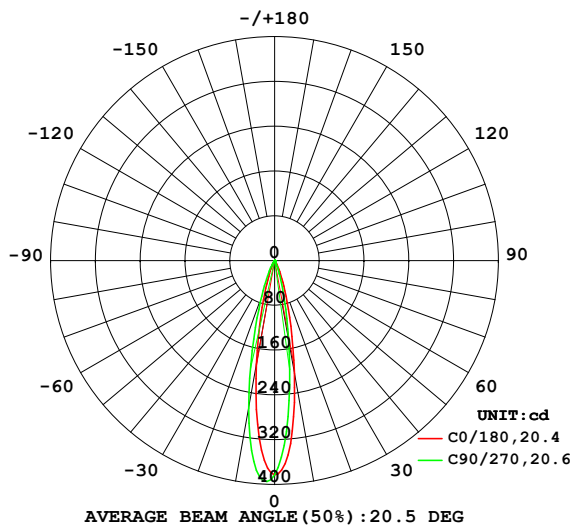

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

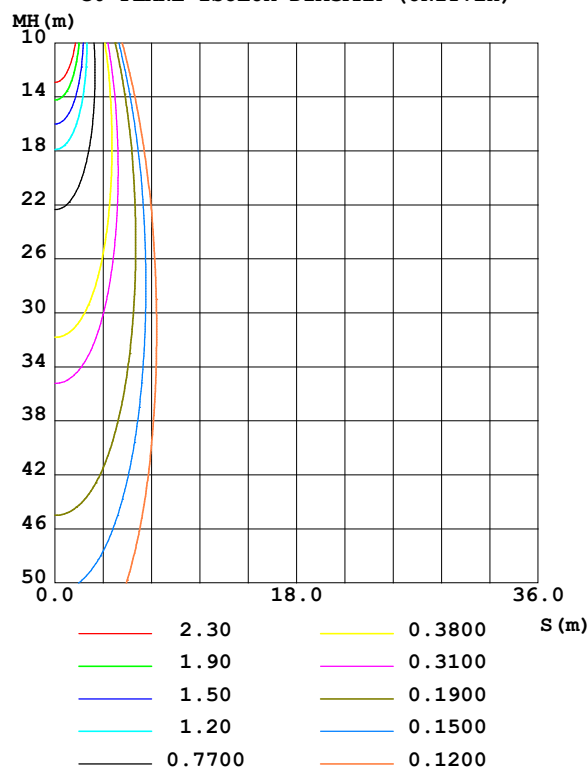

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:001  
Test Date:2023-10-07

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.456  
Humidity:65.0%  
Test Distance:7.580m [K=1.0000]  
Remarks:

## ZONAL FLUX DIAGRAM

## ZONAL FLUX DIAGRAM:

$\gamma$	C0	C45	C90	C135	C180	C225	C270	C315	$\gamma$	$\Phi$ zone	$\Phi$ total	%lum, lamp
10	205.0	169.5	146.6	150.5	187.9	233.7	267.9	251.8	0- 10	26.92	26.92	40,40
20	49.24	34.25	24.94	24.59	36.54	51.97	67.62	62.11	10- 20	28.01	54.92	81.7,81.7
30	9.361	5.353	3.847	4.093	6.490	9.612	13.03	12.13	20- 30	9.347	64.27	95.6,95.6
40	1.012	0.7729	0.8451	0.5166	1.218	1.506	2.232	1.706	30- 40	2.153	66.42	98.8,98.8
50	0.0328	0	0	0	0	0.1699	0.5693	0.3084	40- 50	0.4364	66.86	99.4,99.4
60	0	0	0	0	0	0	0	0	50- 60	0.0174	66.88	99.4,99.4
70	0	0	0	0	0	0	0	0	60- 70	0	66.88	99.4,99.4
80	0	0	0	0	0	0	0	0	70- 80	0	66.88	99.4,99.4
90	0	0	0	0	0	0	0	0	80- 90	0	66.88	99.4,99.4
100	0	0	0	0	0	0	0	0	90-100	0	66.88	99.4,99.4
110	0	0	0	0	0	0	0	0	100-110	0	66.88	99.4,99.4
120	0	0	0	0	0	0	0	0	110-120	0	66.88	99.4,99.4
130	0	0	0	0	0.0114	0.0001	0	0	120-130	0.0001	66.88	99.4,99.4
140	0.0067	0.0249	0.0364	0.0340	0.1428	0.1095	0.0847	0.0891	130-140	0.0153	66.89	99.5,99.5
150	0.1605	0.1956	0.2120	0.2027	0.3307	0.2984	0.2763	0.2783	140-150	0.0919	66.99	99.6,99.6
160	0.3214	0.3346	0.3468	0.3441	0.3886	0.3825	0.3837	0.3750	150-160	0.1448	67.13	99.8,99.8
170	0.3357	0.3302	0.3287	0.3397	0.3440	0.3551	0.3581	0.3532	160-170	0.1024	67.23	100,100
180	0.2785	0.2846	0.2761	0.2895	0.2830	0.2846	0.2852	0.2872	170-180	0.0301	67.26	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 66.734 lm

%lum = 99.2%

%lamp = 99.2%

Conical surface Flux(130deg): 66.878 lm

%lum = 99.4%


%lamp = 99.4%

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3℃  
 Operators:001  
 Test Date:2023-10-07

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.456  
 Humidity:65.0%  
 Test Distance:7.580m [K=1.0000]  
 Remarks:

## LUMINANCE LIMITATION CURVES

Test:U:3.0296V I:0.4031A P:1.2204W PF:0.9994 Freq:0Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:67.2623x1 lm		
NAME: DL3766 3000K 24D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 15	Shielding Angle:

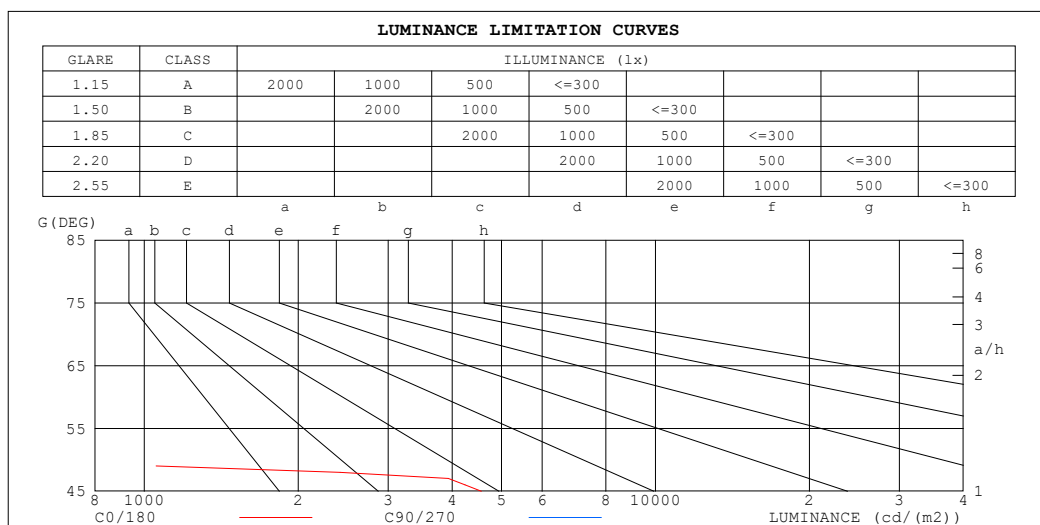

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	0	0
80	0	0
75	0	0
70	0	0
65	0	0
60	0	0
55	0	0
50	285	0
45	4562	926


C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:001  
Test Date:2023-10-07

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.456  
Humidity:65.0%  
Test Distance:7.580m [K=1.0000]  
Remarks:

## CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:3.0296V I:0.4031A P:1.2204W PF:0.9994 Freq:0Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:67.2623x1 lm		
NAME: DL3766 3000K 24D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 15	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

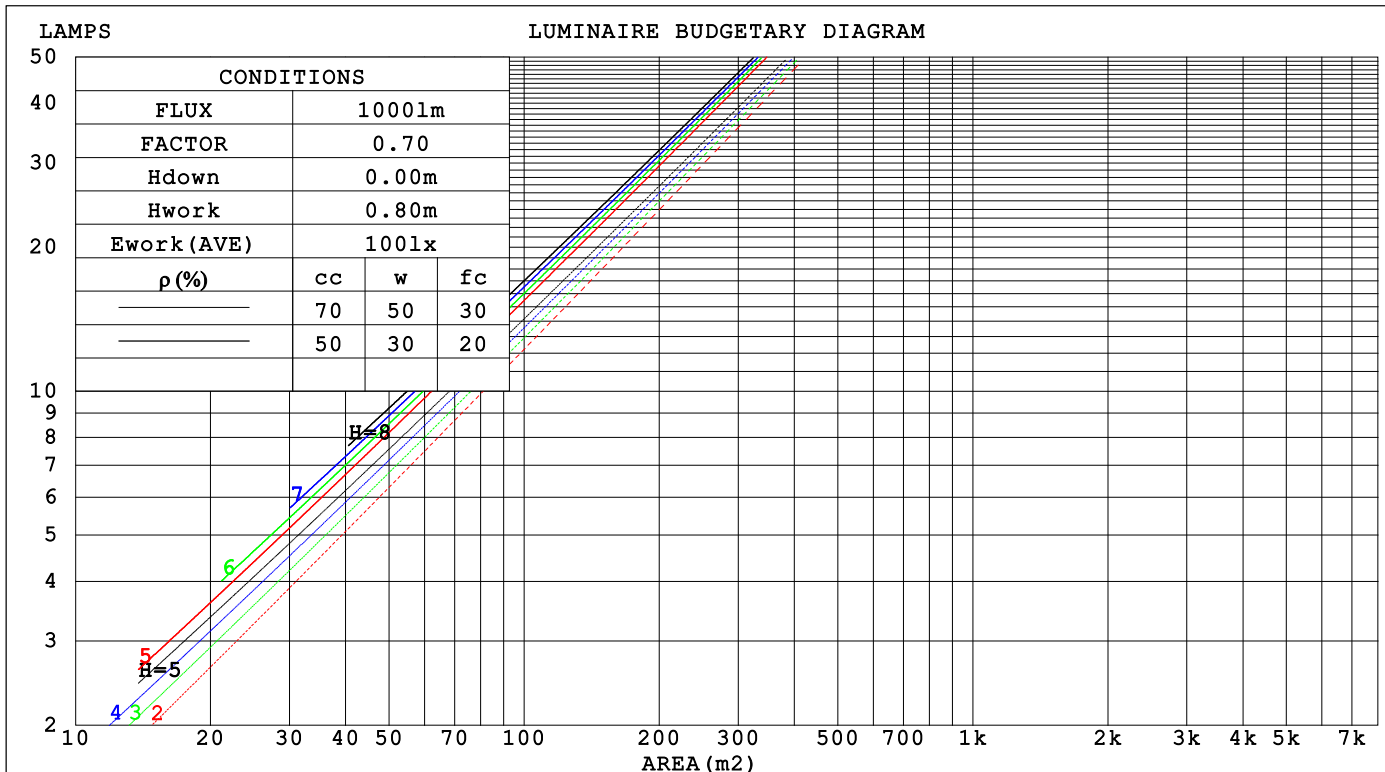

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:001  
Test Date:2023-10-07

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.456  
Humidity:65.0%  
Test Distance:7.580m [K=1.0000]  
Remarks:

### WEC AND CCEC

Test:U:3.0296V I:0.4031A P:1.2204W PF:0.9994 Freq:0Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:67.2623x1 lm		
NAME: DL3766 3000K 24D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 15	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.133	.075	.024	.126	.072	.023	.113	.065	.021	.101	.059	.019	.091	.053	.017		
2.0	.122	.067	.021	.117	.064	.020	.106	.059	.018	.097	.054	.017	.088	.050	.016		
3.0	.114	.061	.018	.109	.058	.018	.100	.054	.017	.092	.051	.016	.085	.047	.015		
4.0	.107	.055	.016	.103	.054	.016	.095	.050	.015	.088	.047	.014	.082	.045	.014		
5.0	.100	.051	.015	.097	.050	.014	.091	.047	.014	.085	.045	.013	.079	.042	.013		
6.0	.095	.047	.014	.092	.046	.013	.086	.044	.013	.081	.042	.012	.077	.040	.012		
7.0	.090	.044	.013	.087	.044	.012	.083	.042	.012	.078	.040	.012	.074	.038	.011		
8.0	.086	.042	.012	.083	.041	.012	.079	.040	.011	.075	.038	.011	.072	.037	.011		
9.0	.082	.040	.011	.080	.039	.011	.076	.038	.011	.073	.036	.010	.069	.035	.010		
10.0	.078	.038	.010	.077	.037	.010	.073	.036	.010	.070	.035	.010	.067	.034	.010		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)										
0.0	.195	.195	.195	.167	.167	.167	.114	.114	.114	.065	.065	.065	.021	.021	.021		
1.0	.172	.162	.153	.148	.139	.131	.101	.096	.091	.058	.055	.053	.019	.018	.017		
2.0	.154	.137	.123	.132	.118	.106	.090	.082	.074	.052	.048	.043	.017	.015	.014		
3.0	.139	.118	.101	.119	.102	.087	.082	.071	.061	.047	.041	.036	.015	.013	.012		
4.0	.126	.102	.084	.108	.088	.073	.074	.062	.051	.043	.036	.030	.014	.012	.010		
5.0	.115	.090	.071	.099	.078	.062	.068	.054	.044	.040	.032	.026	.013	.010	.009		
6.0	.106	.080	.061	.092	.069	.053	.063	.048	.037	.037	.028	.022	.012	.009	.007		
7.0	.099	.072	.053	.085	.062	.046	.059	.044	.032	.034	.026	.019	.011	.008	.006		
8.0	.092	.065	.046	.079	.056	.040	.055	.039	.028	.032	.023	.017	.010	.008	.006		
9.0	.086	.059	.041	.074	.051	.035	.052	.036	.025	.030	.021	.015	.010	.007	.005		
10.0	.082	.054	.036	.070	.047	.032	.049	.033	.022	.028	.020	.013	.009	.006	.004		

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:001  
Test Date:2023-10-07

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.456  
Humidity:65.0%  
Test Distance:7.580m [K=1.0000]  
Remarks:

### UGR(Unified Glare Rating) Table

Test:U:3.0296V I:0.4031A P:1.2204W PF:0.9994 Freq:0Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:67.2623x1 lm										
NAME: DL3766 3000K 24D					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: VJC Lighting					SUR.: 15			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	15.9	16.5	16.1	16.7	16.8	13.1	13.7	13.3	13.9	14.0
3H	15.7	16.3	16.0	16.5	16.7	13.0	13.5	13.2	13.7	13.9
4H	15.7	16.2	15.9	16.4	16.6	12.9	13.4	13.2	13.7	13.9
6H	15.6	16.1	15.9	16.3	16.6	12.8	13.3	13.1	13.6	13.8
8H	15.5	16.0	15.8	16.3	16.5	12.8	13.3	13.1	13.5	13.8
12H	15.5	16.0	15.8	16.2	16.5	12.7	13.2	13.0	13.5	13.7
4H 2H	15.7	16.2	15.9	16.4	16.6	12.9	13.4	13.2	13.7	13.9
3H	15.5	16.0	15.8	16.2	16.5	12.7	13.2	13.0	13.5	13.7
4H	15.4	15.8	15.7	16.1	16.4	12.6	13.1	13.0	13.4	13.7
6H	15.3	15.7	15.7	16.0	16.4	12.5	12.9	12.9	13.2	13.6
8H	15.2	15.6	15.6	16.0	16.3	12.5	12.8	12.9	13.2	13.6
12H	15.2	15.5	15.6	15.9	16.3	12.4	12.7	12.8	13.1	13.5
8H 4H	15.2	15.6	15.6	16.0	16.3	12.5	12.8	12.9	13.2	13.6
6H	15.1	15.4	15.5	15.8	16.2	12.3	12.6	12.8	13.0	13.5
8H	15.0	15.3	15.5	15.7	16.2	12.3	12.5	12.7	13.0	13.4
12H	15.0	15.2	15.5	15.7	16.1	12.2	12.4	12.7	12.9	13.4
12H 4H	15.2	15.5	15.6	15.9	16.3	12.4	12.7	12.8	13.1	13.5
6H	15.0	15.3	15.5	15.7	16.2	12.3	12.5	12.7	13.0	13.4
8H	15.0	15.2	15.5	15.7	16.1	12.2	12.4	12.7	12.9	13.4
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 5.3 / - 1.\$					+ 2.6 / - 1.\$				
1.5H	+ 7.4 / - 1.\$					+ 5.4 / - 1.\$				
2.0H	+10.1 / - 1.\$					+11.3 / - 1.\$				

CIE Pub.117, 67.26 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -9.4)  
Area: 0.00018 m2

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:001  
Test Date:2023-10-07

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.456  
Humidity:65.0%  
Test Distance:7.580m [K=1.0000]  
Remarks:

### UTILIZATION FACTORS TABLE

Test:U:3.0296V I:0.4031A P:1.2204W PF:0.9994 Freq:0Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:67.2623x1 lm		
NAME: DL3766 3000K 24D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 15	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	91	85	82	90	85	82	90	85	81	78
0.80	98	93	89	97	92	89	96	92	89	85
1.00	102	97	93	101	96	93	99	96	92	89
1.25	105	100	97	104	100	97	102	99	96	92
1.50	107	103	100	106	102	100	104	101	99	94
2.00	110	106	103	108	105	102	105	103	101	96
2.50	111	108	105	110	106	104	106	104	102	96
3.00	112	109	107	111	108	106	107	105	104	97
4.00	114	112	110	112	110	108	109	107	106	99
5.00	116	114	112	113	112	110	109	108	107	99
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature: 25.3 °C  
Operators: 001  
Test Date: 2023-10-07

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.456  
Humidity: 65.0%  
Test Distance: 7.580m [K=1.0000]  
Remarks:

## ISOCANDELA DIAGRAM

Test:U:3.0296V I:0.4031A P:1.2204W PF:0.9994 Freq:0Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:67.2623x1 lm		
NAME: DL3766 3000K 24D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 15	Shielding Angle:

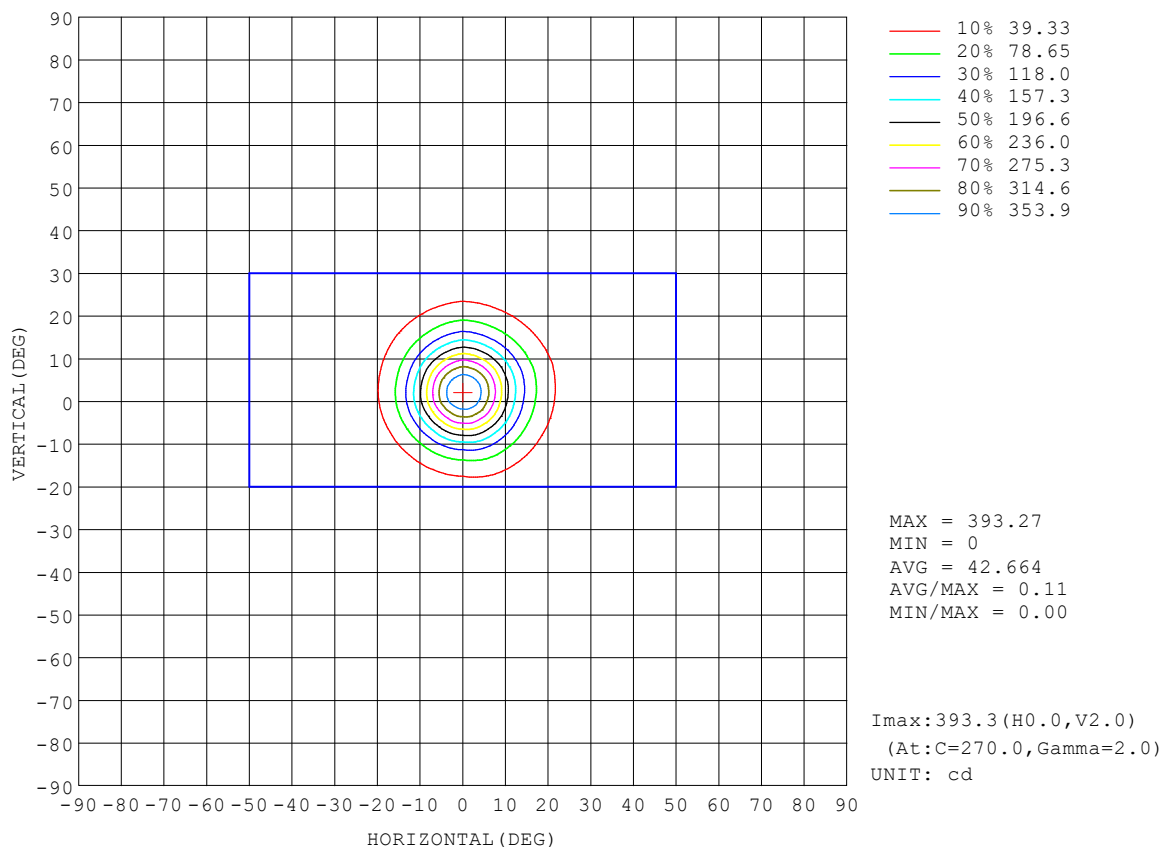


C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature: 25.3°C  
Operators: 001  
Test Date: 2023-10-07

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.456  
Humidity: 65.0%  
Test Distance: 7.580m [K=1.0000]  
Remarks:



### AAI Figure

Test:U:3.0296V I:0.4031A P:1.2204W PF:0.9994 Freq:0Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:67.2623x1 lm		
NAME: DL3766 3000K 24D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 15	Shielding Angle:

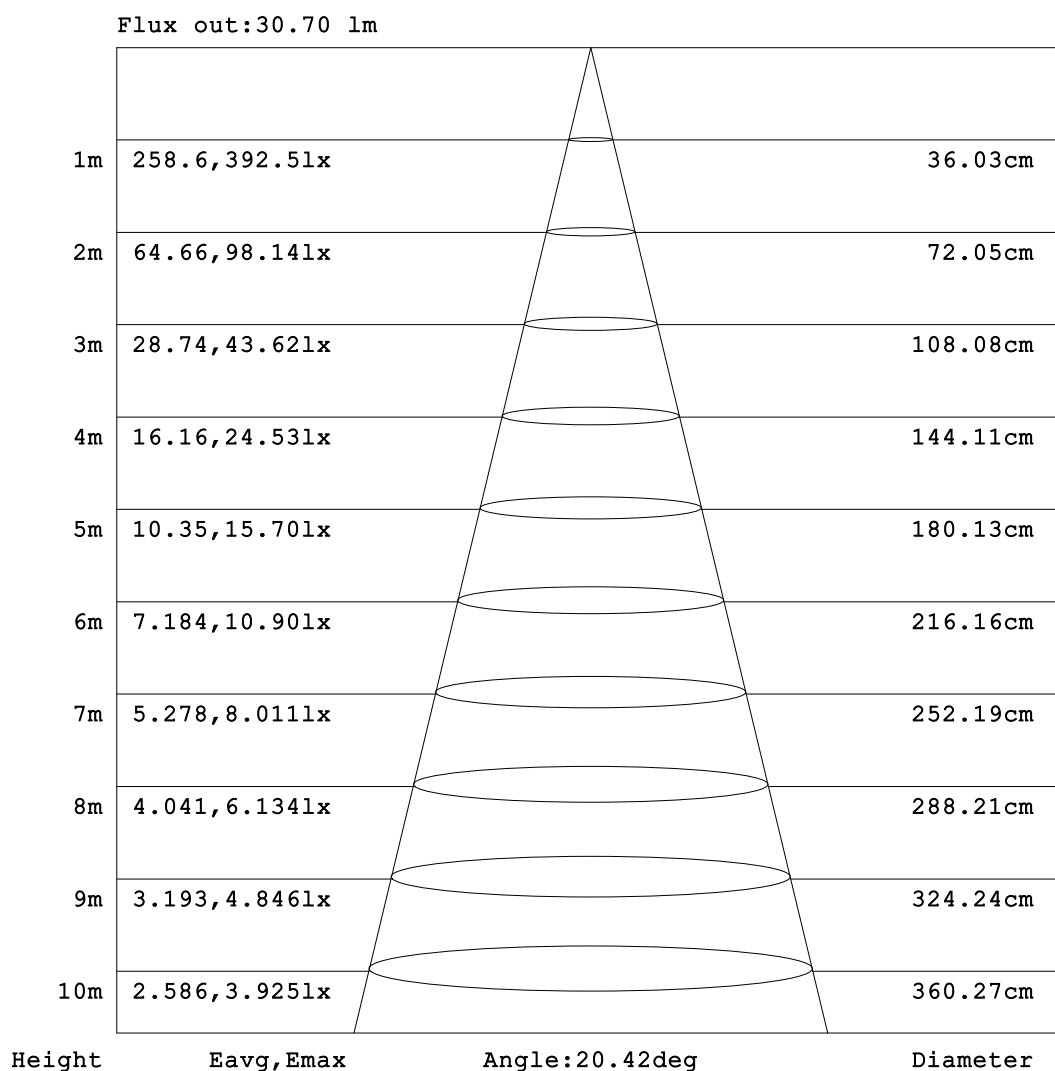


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:001  
Test Date:2023-10-07

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.456  
Humidity:65.0%  
Test Distance:7.580m [K=1.0000]  
Remarks:

## ISOLUX DIAGRAM

Test:U:3.0296V I:0.4031A P:1.2204W PF:0.9994 Freq:0Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:67.2623x1 lm		
NAME: DL3766 3000K 24D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 15	Shielding Angle:

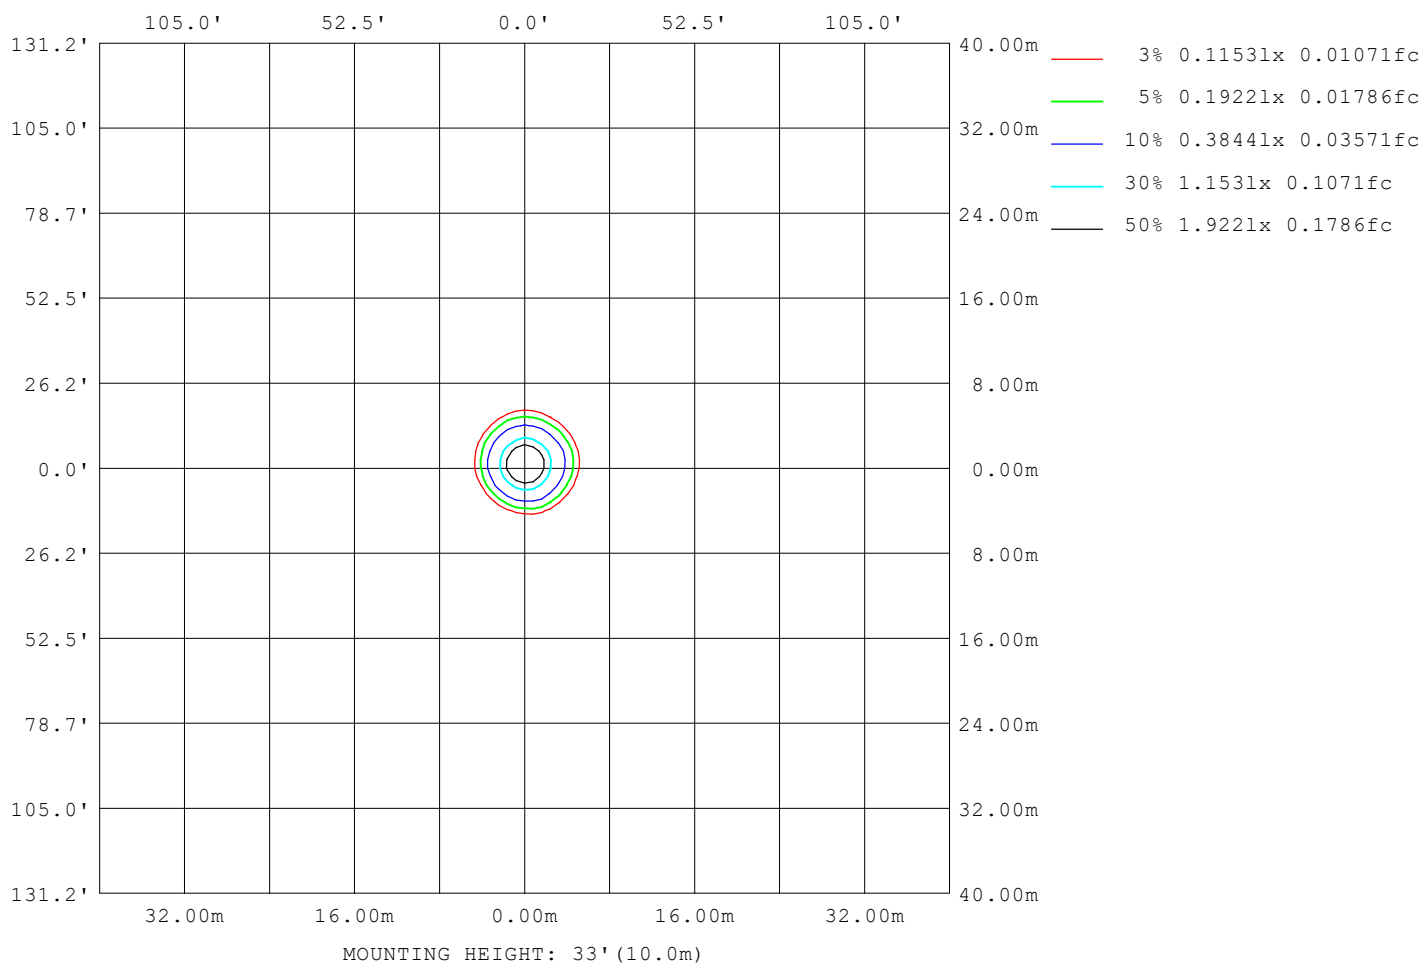

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature: 25.3°C  
Operators: 001  
Test Date: 2023-10-07

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.456  
Humidity: 65.0%  
Test Distance: 7.580m [K=1.0000]  
Remarks:

## LED Avg.L Report

Test:U:3.0296V I:0.4031A P:1.2204W PF:0.9994 Freq:0Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:67.2623x1 lm		
NAME: DL3766 3000K 24D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 15	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	0
L_0~180 (75) av	0
L_0~180 (85) av	0
L_90~270 (65) av	0
L_90~270 (75) av	0
L_90~270 (85) av	0
L_45 (65) av	0
L_45 (75) av	0
L_45 (85) av	0

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:001  
Test Date:2023-10-07

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.456  
Humidity:65.0%  
Test Distance:7.580m [K=1.0000]  
Remarks:

## Planar Illuminance Curve

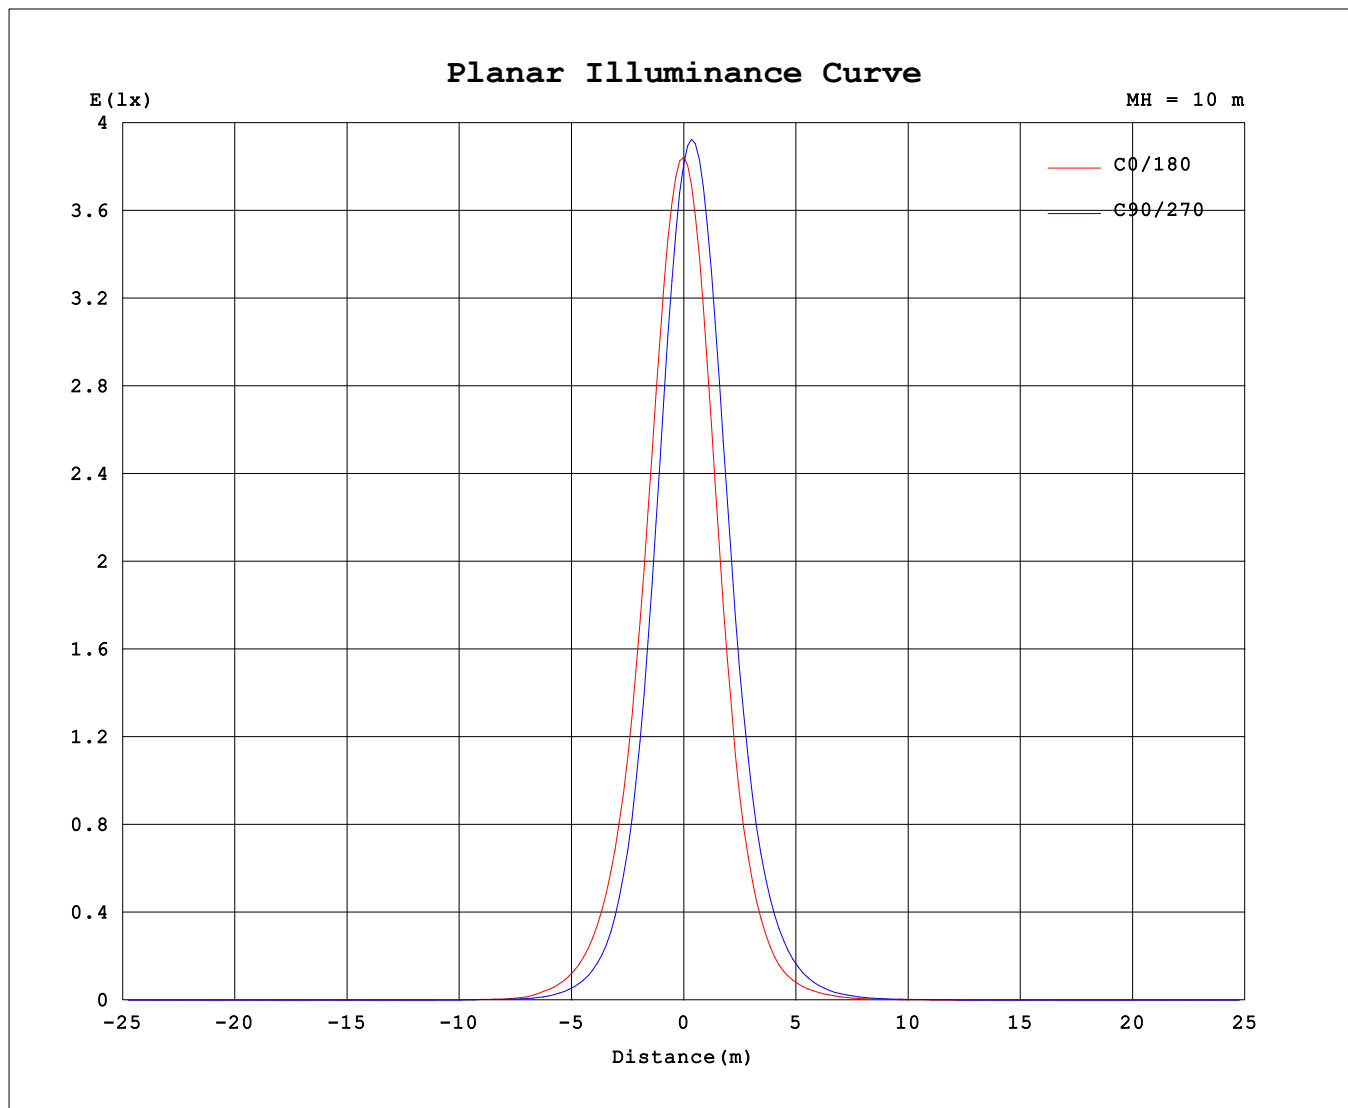

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature: 25.3 °C  
Operators: 001  
Test Date: 2023-10-07

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.456  
Humidity: 65.0%  
Test Distance: 7.580m [K=1.0000]  
Remarks:

## LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:3.0296V I:0.4031A P:1.2204W PF:0.9994 Freq:0Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:67.2623x1 lm		
NAME: DL3766 3000K 24D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 15	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	383	383	383	383	383	383	383	383	383	383	383	383	383	383	383	383			
5	328	314	297	288	279	281	285	299	318	334	355	367	376	372	365	348			
10	205	187	170	159	147	147	150	166	188	208	234	252	268	262	252	231			
15	105	90.2	79.8	72.7	63.9	61.7	65.4	73.3	86.8	99.3	116	130	145	139	135	123			
20	49.2	40.0	34.3	30.1	24.9	24.0	24.6	28.5	36.5	43.6	52.0	59.2	67.6	64.5	62.1	59.9			
25	22.0	17.4	14.1	12.3	10.4	9.73	9.99	11.6	14.7	17.9	22.5	26.6	30.4	28.6	27.9	27.1			
30	9.36	7.03	5.35	4.44	3.85	3.75	4.09	5.06	6.49	7.75	9.61	11.3	13.0	12.5	12.1	11.4			
35	2.91	1.85	1.54	1.54	1.48	1.24	1.47	2.09	2.82	3.27	3.98	4.69	5.40	5.08	5.17	4.39			
40	1.01	0.63	0.77	0.92	0.85	0.38	0.52	0.95	1.22	1.18	1.51	1.95	2.23	1.75	1.71	1.50			
45	0.58	0.24	0.37	0.25	0.12	0.05	0.14	0.52	0.66	0.40	0.51	1.14	1.23	0.76	0.76	0.81			
50	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.17	0.58	0.57	0.33	0.31	0.20			
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
135	0.00	0.00	0.00	0.01	0.00	0.01	0.00	0.00	0.06	0.03	0.03	0.00	0.02	0.00	0.03	0.00			
140	0.01	0.04	0.02	0.06	0.04	0.06	0.03	0.05	0.14	0.10	0.11	0.07	0.08	0.06	0.09	0.07			
145	0.07	0.11	0.10	0.14	0.12	0.14	0.11	0.12	0.24	0.20	0.20	0.16	0.18	0.15	0.18	0.17			
150	0.16	0.20	0.20	0.23	0.21	0.23	0.20	0.21	0.33	0.29	0.30	0.26	0.28	0.25	0.28	0.26			
155	0.26	0.29	0.28	0.32	0.30	0.32	0.29	0.30	0.38	0.36	0.37	0.34	0.36	0.33	0.35	0.34			
160	0.32	0.34	0.33	0.34	0.35	0.35	0.34	0.34	0.39	0.39	0.38	0.38	0.38	0.37	0.37	0.38			
165	0.34	0.34	0.34	0.34	0.35	0.35	0.35	0.35	0.38	0.39	0.39	0.38	0.39	0.38	0.38	0.38			
170	0.34	0.31	0.33	0.31	0.33	0.31	0.34	0.32	0.34	0.37	0.36	0.38	0.36	0.38	0.35	0.37			
175	0.30	0.28	0.29	0.28	0.28	0.28	0.30	0.29	0.29	0.32	0.31	0.33	0.30	0.33	0.31	0.32			
180	0.28	0.28	0.28	0.28	0.28	0.28	0.29	0.29	0.28	0.28	0.28	0.28	0.29	0.29	0.29	0.29			

C Range: 0 - 360DEG

C Interval: 22.5DEG

Test Speed: HIGH

Temperature:25.3℃

Operators:001

Test Date:2023-10-07

γ Range: 0 - 180DEG

γ Interval: 1.0DEG

Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.456

Humidity:65.0%

Test Distance:7.580m [K=1.0000]

Remarks: